


PEDESTRIAN ACCESS CONTROL SYSTEMS

50TH
ANNIVERSARY

Turnstiles, speed gates and high security solutions

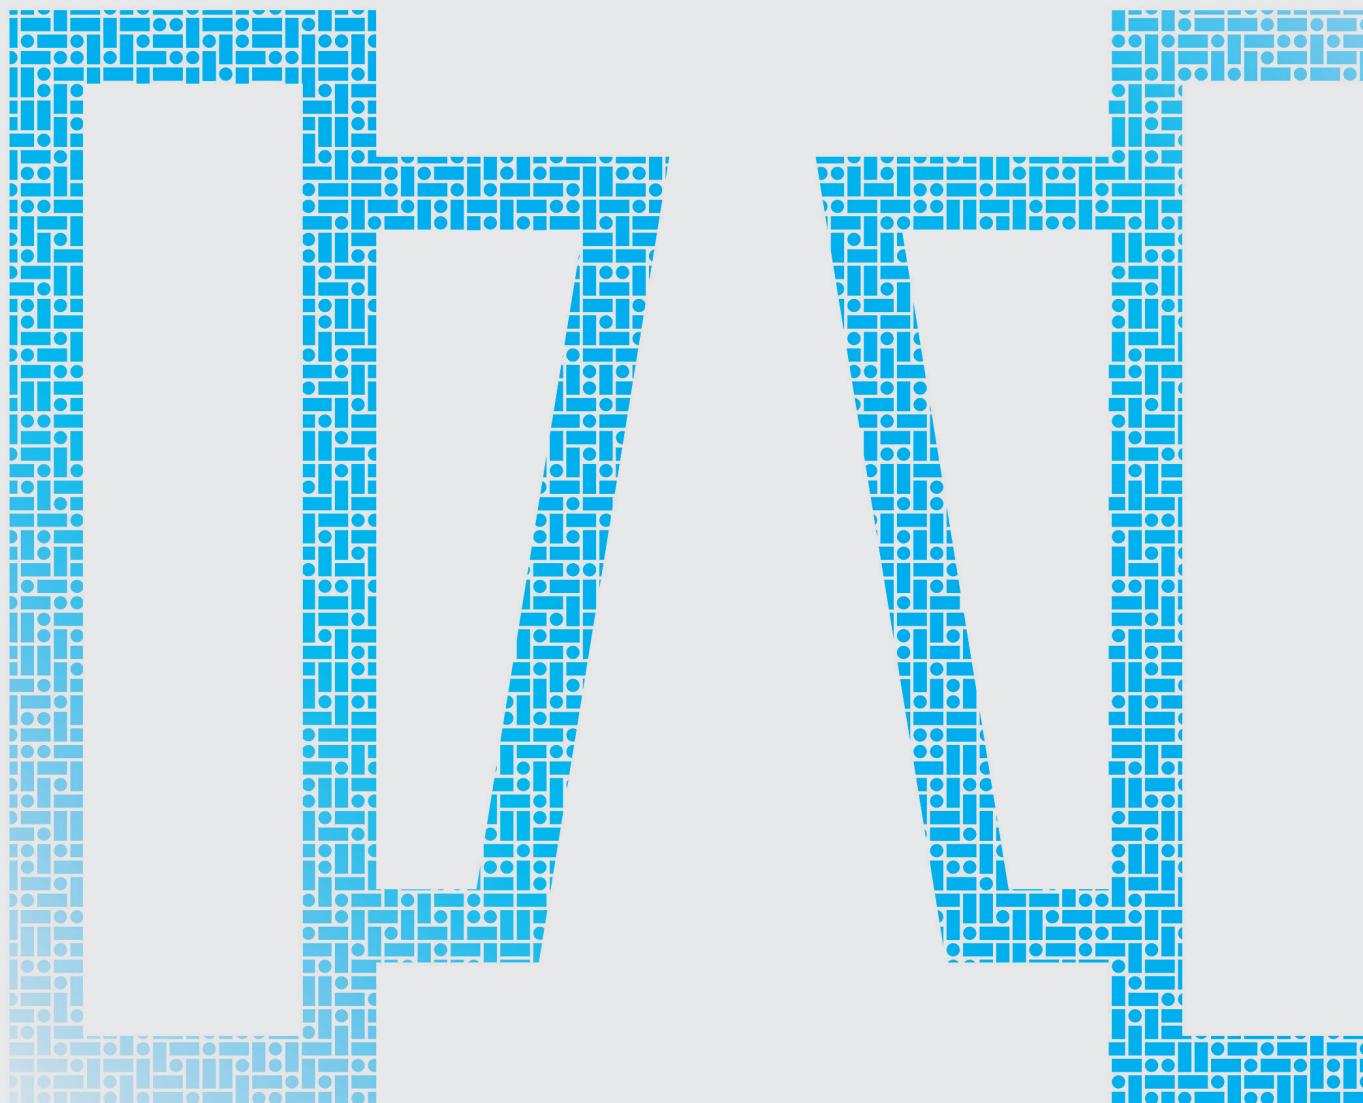

CAME 
ÖZAK

CAME.COM/OZAK

CAME  **ÖZAK**

GENERAL INDEX

3	GENERAL INDEX
4	A NEW WAY OF THINKING, A NEW WAY OF DOING
5	VISION & MISSION
6	FOREVER INNOVATORS
7	THE CAME OFFER
8	ACCESS CONTROL
10	OUR WORLDWIDE NETWORK
12	EXTENSIVE SOLUTIONS OVER 40 YEARS FOR SECURITY AND WELL-BEING OF THE PEOPLE AROUND THE GLOBE.
13	CAME ÖZAK TIMELINE

15 WAIST HEIGHT TURNSTILES

16	602
17	602 D
20	500 E
21	500 E D
23	702 R N1
26	700 E N1
27	700 E N1 D

31 TURNSTILES FOR REDUCED MOBILITY

32	605
33	605 D
34	705 E N1
35	705 E N1 D

39 FREE PASSAGE TURNSTILES

40	SWG 101
41	MRKT 404

43 SPEED GATES

44	HG 01
46	HG 02 EU
50	HG 02 DP EU
52	SG 55 SLIDING GATE
56	SG 90 SLIDING GATE
58	PG 03 55 PADDLE GATE
60	PG 03 90 PADDLE GATE

63 GLASS LINE

64	GL A1
65	GL B1
67	GL A2
68	SALOON

71 HALF HEIGHT TURNSTILES

72	HT 400
73	HT 400 D

76 FULL HEIGHT TURNSTILES

78	BT 312
79	BT 312 D
80	BTX 300 N1
81	BTX 300 N1 D
84	BT ROOF 300
85	BT ROOF 300 D
86	BTC 300
87	BTC 300 D
88	BTG 300
89	BTG 300 D
92	BT 402
93	BT 402 D
94	BTX 400 N1
95	BTX 400 N1 D
98	BTC 400
99	BTC 400 D
100	BTG 400
101	BTG 400 D

103 EXIT GATES

104	BT 100 (MOTORIZED)
105	PEGA 100 (MANUAL)

107 GLASS FULL HEIGHT SERIES

108	BT 302 GL
109	BT 402 GL

111 HIGH SECURITY SERIES

112	CGG - SQ - AIR
118	ACCESSORIES
119	CUSTOMISATIONS

A NEW WAY OF THINKING, A NEW WAY OF DOING

If we think differently, we act differently, in a way that simplifies the lives of people and improves the work of professionals, creating skills and investing in research generating global solutions.

We help our end customers by providing them with safe, efficient and convenient solutions to improve the quality of their living spaces, whether private or public.

We do this thanks to the know-how and expertise of our global network; we are a global benchmark for automation, smart homes, access control and security, and parking systems.



VIS ION

We believe in a world
where sustainable technological innovation
makes people's lives
more comfortable, simple and secure

MIS SION

To create a global offer
of high-quality technological products and solutions
for automation, smart homes, access control and security
to improve our customers lives
and our partners business

FOREVER INNOVATORS

For over 50 years, we at CAME have designed and produced high-quality technological products and solutions for the comfort and security of people in residential, public and business environments.

Thanks to the trust of our customers, we have become a go-to brand and global partner for automation, smart homes, access control and security, and parking systems.

We have capitalised on our experience and built quality relationships with many professionals, who have become ambassadors of CAME's values, bringing cutting edge technology into the lives of our customers around the world.

Our innovations translated into solutions for people become strategic for defining the scenarios of planning and living the future.



RESIDENTIAL SOLUTIONS



We have gone on to develop an idea of home automation that is increasingly integrated and connected with people's lives. Today, automation is at the heart of the home, managing entrances and garage doors, controlling blinds and shutters, video entry systems and climate control.



BUSINESS SOLUTIONS



For every public area, we offer the most sophisticated systems for pedestrian and vehicle access control and security, video entry systems and parking solutions. Small and large companies, commercial enterprises, large buildings: CAME-branded automation provide control and safety in both small and large working environments.

URBAN SOLUTIONS



The complexity involved in living spaces and in mobility flows require ever greater protection and security, plus enhanced reactive capacity and greater know-how. Our offer is geared to meet the different automation needs for urban planning and architectural scenarios. CAME solutions are engineered for managing safety and control in large works and for contributing to the planning of urban spaces making them "Safe and Smart", as called for in today's fast-paced, metropolitan centres.



ACCESS CONTROL

Our experience, competency, and innovation drive us to provide world-class, cutting-edge solutions for controlling busy access points, exposition and urban venues.

We offer access control solutions with a sophisticated design, but above all open to the integration with third-party technologies.





SPEED GATES



The compact design and fast opening speed make speed gates the ideal solution for settings where the flow of people is high and security must be provided efficiently. They are used in crowded places such as train stations, airports, shopping malls and entertainment venues and can be integrated with biometric recognition systems, smart cards or QR codes, providing an additional level of security.

FULL-HEIGHT TURNSTILES



Full-height turnstiles are the ideal solution to ensure pedestrian access control and maximum security for the places and people inside them. They are suitable for facilities such as stadiums, airports, stations, sports facilities or governmental offices.

ACCESS CONTROL SYSTEM



CAME offers solutions for the management of both pedestrian and vehicle access points combining ease and versatility of use. These flexible systems make it possible to control both a single gateway and a multiaccess system, ensuring that up to 10,000 users can be managed at each site.

OUR WORLDWIDE NETWORK


CAME is a technological partner for those projects that require integrated systems for improving the quality of our living spaces, whether private or public, with products designed for controlling the home, managing urban and business environments.

We are a worldwide network. From our Treviso Headquarters, the heart of the Group, we coordinate **10 manufacturing plants** and **4 R&D centres**. We have more than **25 subsidiaries** and **40 warehouses worldwide**.

Thanks to our commercial partners and distributors, **we operate in more than 110 countries** with an integrated and global vision.

Our Group shares common goals, which go well beyond our respective specializations: thanks to the synergies that exist among all the divisions and brands, we share a modus operandi that enriches our diversity.

CAME  CAME  URBACO CAME  PARKARE CAME  ÖZAK
CAME  KMS CAME  NEPOS CAME  ENTROTEC

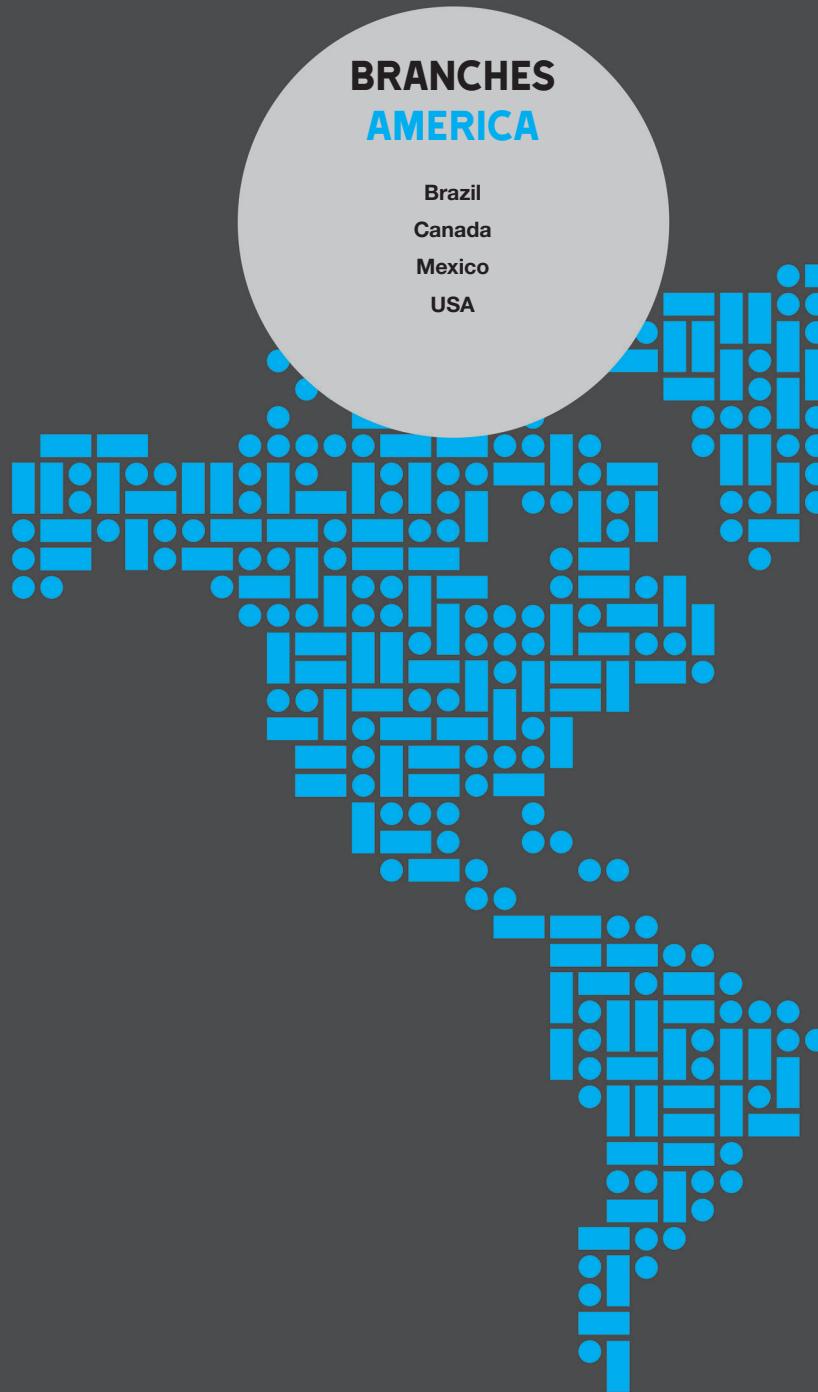

309

2023 TURNOVER
(MLN EUROS)

10

PRODUCTION
PLANTS

4

R&D CENTRES

+25

DIRECT
BRANCHES

+110

COUNTRIES WITH
PARTNERS AND
DISTRIBUTORS

+40

WAREHOUSES IN
THE WORLD

BRANCHES EUROPE

Italy
Belgium
Croatia
France
Germany
Ireland
Netherlands
Poland
Portugal
Russia
Spain
UK
Türkiye

CAME HEADQUARTERS

Treviso, Italy

BRANCHES ASIA

United Arab Emirates
China

EXTENSIVE SOLUTIONS OVER 40 YEARS FOR SECURITY AND WELL-BEING OF THE PEOPLE AROUND THE GLOBE.







CAME ÖZAK, a global player, has incorporated one of the widest range of products offering solutions in pedestrian and vehicle access control fields. We owe our success to our talented designers and engineers along with our flexible manufacturing processes.

Understanding needs of the people, thus providing customised solutions tailored to expectations has made our offering a choice for numerous residential, governmental, urban and sports facilities. Our fully integratable, user friendly and high performance solutions are available with our solution partners all over the world.

CAME  **ÖZAK**

TIMELINE

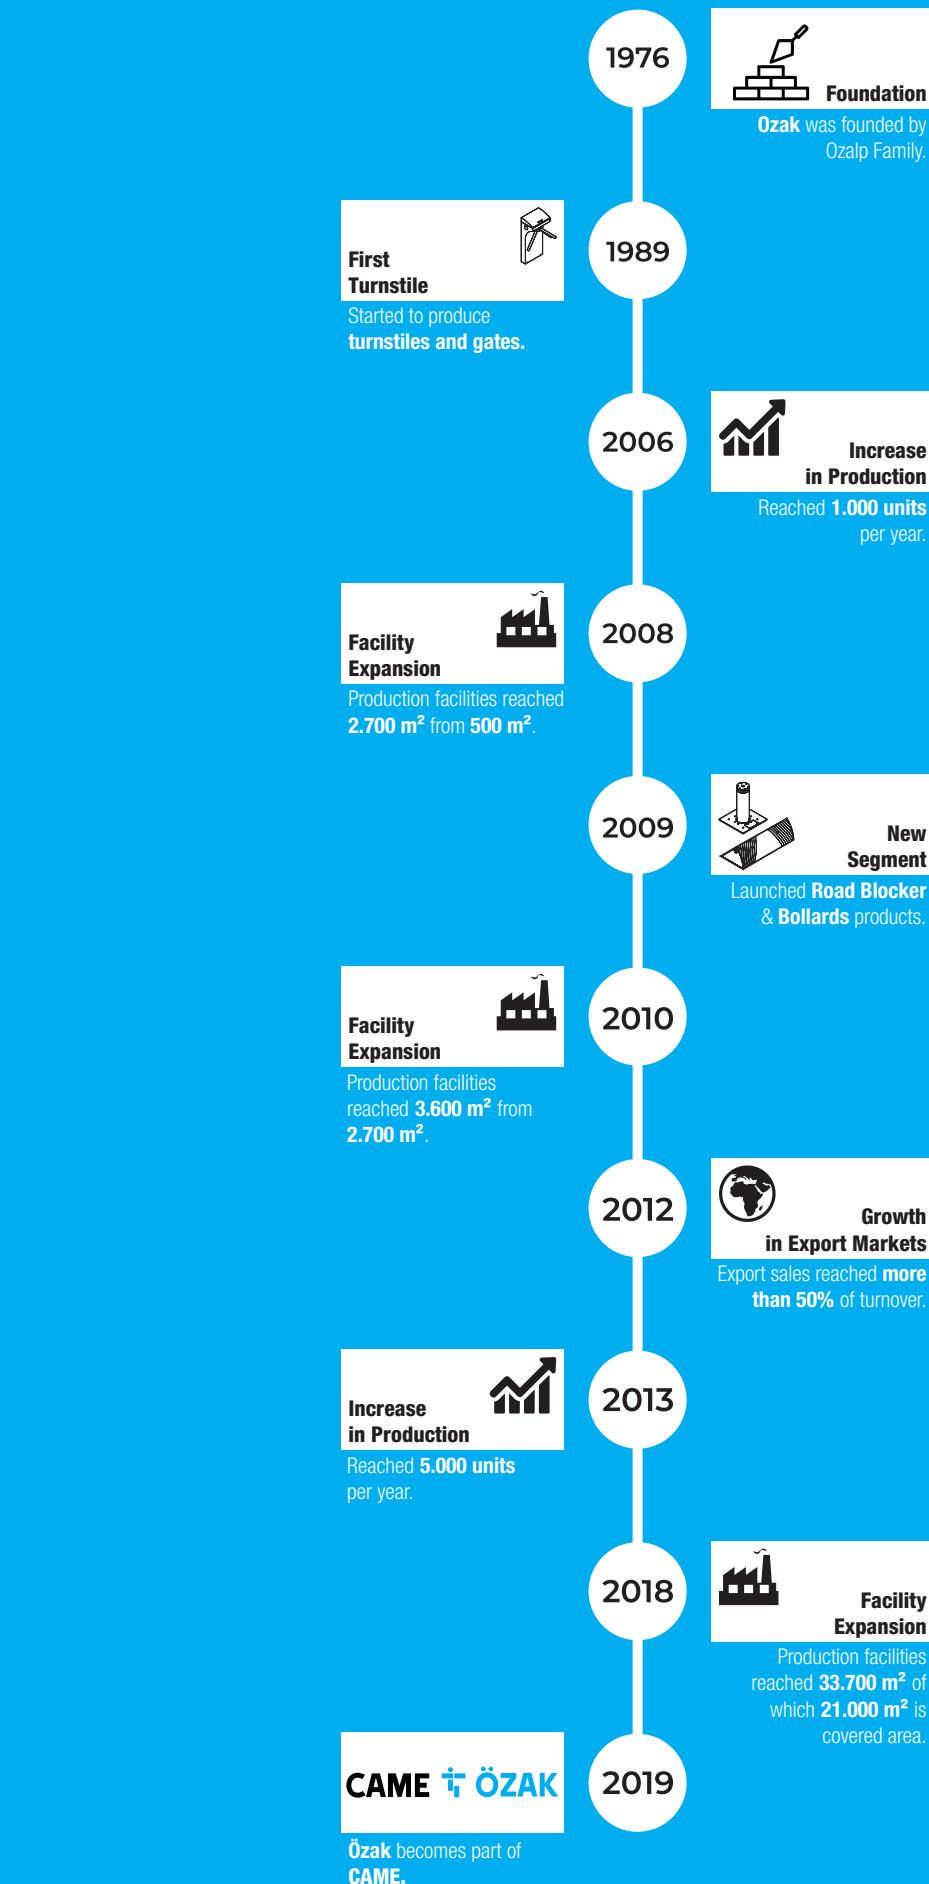

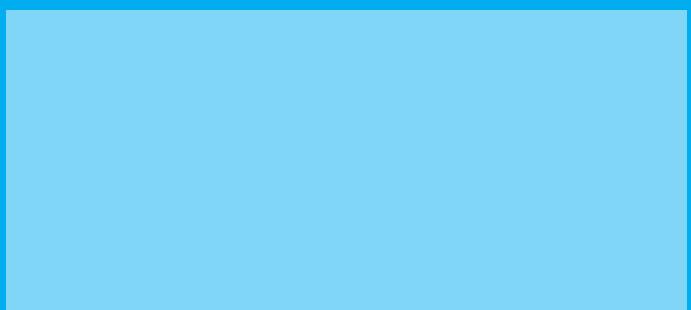


WAIST HEIGHT TURNSTILES

16	602
17	602 D
20	500 E
21	500 E D
23	702 R N1
26	700 E N1
27	700 E N1 D



Dimensions (mm)

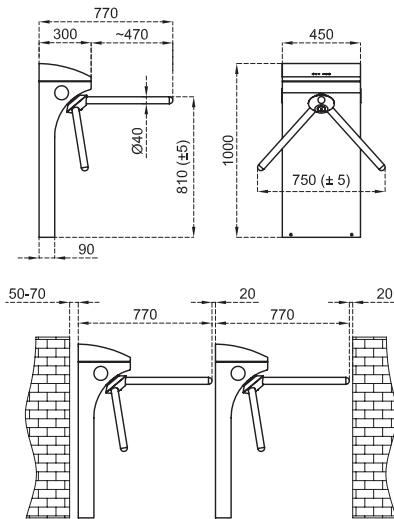


Technical Features

Place of Use	Indoors, outdoors.	
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.	
Operating Intensity	100%, 7/24 use.	
Body Features	Material : 304 grade (opt. 316 grade) stainless steel. Finishing : Orbital brushed matt (opt. electrostatic powder coating on stainless steel).	
Arms	Automatic Drop (Retractable) Arm : Optional Material : Ø40x2 mm 304 grade (opt. 316 grade) stainless steel, one by one demountable. Finishing : Satine brushed (opt. orbital brushed matt, electrostatic powder coating on stainless steel).	
Indicators	Side Status / Direction Indicators : LED, standard. Top Passage Indicator : LED, standard.	
Power	Operating Voltage : 110/220V AC 50/60 Hz. (%±10), 24V DC. Consumption : ~3,4W at stand-by, during passage ~2,7W (varies according to the options and accessories used).	
Operating Modes	System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card. Entry - exit controlled Entry controlled, exit free Entry free, exit controlled Single input both directions use Entry - exit free	
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).	
Control System	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232-RS485-TCP/IP module is available.	
Flow Rate	Capacity of mechanism (manual) : Max. 82 cycle/min. Nominal : ~30 pass/min. Capacity of mechanism (motorized) : Max. 75 cycle/min. Nominal : ~25 pass/min. (Passage rate can change depending on the access control system utilized)	
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.	
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.	
Weight	~35 kg	
Optional Features and Accessories	Automatic drop (retractable) arm, motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), coin slot and coin box, single/multiple intelligent coin/token slot and box, counter (with/without reset), card reader mounting bracket, photocell alarm sensor, passage completion sensor, contactless passage sensor (for motorized models), heater positive, top lid weight sensor, bottom plate, battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, electrostatic powder coating on stainless steel.	



Dimensions (mm)

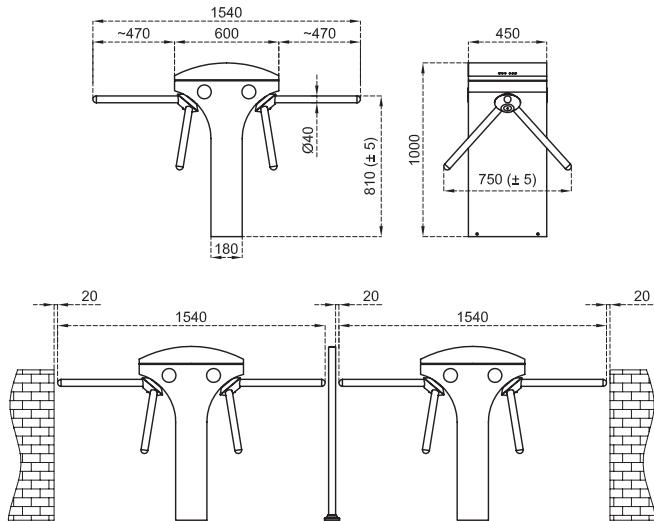

Technical Features


Place of Use	Indoors, outdoors.	
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.	
Operating Intensity	100%, 7/24 use.	
Body Features	Material : 304 grade (opt. 316 grade) stainless steel. Finishing : Orbital brushed matt (opt. electrostatic powder coating on stainless steel).	
Arms	Automatic Drop (Retractable) Arm : Optional Material : Ø40x2 mm 304 grade (opt. 316 grade) stainless steel, one by one demountable. Finishing : Satine brushed (opt. orbital brushed matt, electrostatic powder coating on stainless steel).	
Indicators	Side Status / Direction Indicators : LED, standard. Top Passage Indicator : LED, standard.	
Power	Operating Voltage : 110/220V AC 50/60 Hz. (%±10), 24V DC. Consumption : ~6,8W at stand-by, during passage ~2,7+2,7W (varies according to the options and accessories used).	
Operating Modes	System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card. Entry - exit controlled Entry controlled, exit free Entry free, exit controlled Single input both directions use Entry - exit free	
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).	
Control System	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232-RS485-TCP/IP module is available.	
Flow Rate	Capacity of mechanism (manual) : Max. 164 cycle/min. Nominal : ~60 pass/min. Capacity of mechanism (motorized) : Max. 150 cycle/min. Nominal : ~50pass/min. (Passage rate can change depending on the access control system utilized)	
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.	
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.	
Weight	~55 kg	
Optional Features and Accessories	Automatic drop (retractable) arm, motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), coin slot and coin box, single/multiple intelligent coin/token slot and box, counter (with/without reset), card reader mounting bracket, photocell alarm sensor, passage completion sensor, contactless passage sensor (for motorized models), heater positive, top lid weight sensor, bottom plate, battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, electrostatic powder coating on stainless steel.	








Dimensions (mm)

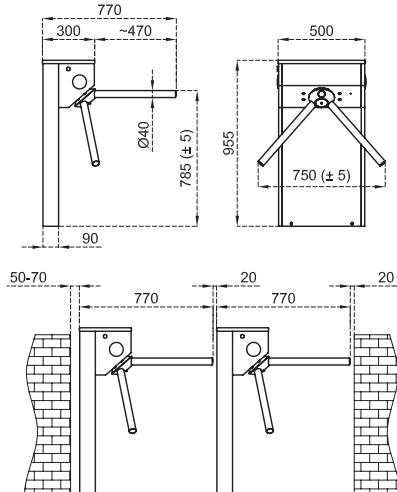

Technical Features

Place of Use	Indoors, outdoors						
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.						
Operating Intensity	100%, 7/24 use.						
Body Features	<p>Material : 304 grade (opt. 316 grade) stainless steel.</p> <p>Finishing : Orbital brushed matt (opt. electrostatic powder coating on stainless steel).</p>						
Arms	<p>Automatic Drop (Retractable) Arm : Optional</p> <p>Material : Ø40x2 mm 304 grade (opt. 316 grade) stainless steel, one by one demountable.</p> <p>Finishing : Satin brushed (opt. orbital brushed matt, electrostatic powder coating on stainless steel)</p>						
Indicators	Side Status / Direction Indicators : LED, standard.						
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (%±10), 24V DC.</p> <p>Consumption : ~3,1W at stand-by, during passage ~2,6W (varies according to the options and accessories used).</p>						
Operating Modes	<p>System operates bi-directionally (entry-exit).</p> <p>Operating modes can be adjusted through the buttons and screen on the control card.</p> <table> <tr> <td>Entry - exit controlled</td> <td>Entry controlled, exit free</td> <td>Entry free, exit controlled</td> </tr> <tr> <td>Single input both directions use</td> <td>Entry - exit free</td> <td></td> </tr> </table>	Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled	Single input both directions use	Entry - exit free	
Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled					
Single input both directions use	Entry - exit free						
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).						
Control System	<p>All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card.</p> <p>All inputs are opto-coupler protected.</p> <p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available.</p>						
Flow Rate	<p>Capacity of mechanism (manual) : Max. 82 cycle/min. Nominal : ~30 pass/min.</p> <p>Capacity of mechanism (motorized) : Max. 75 cycle/min. Nominal : ~25 pass/min.</p> <p>(Passage rate can change depending on the access control system utilized)</p>						
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.						
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.						
Weight	~29 kg						
Optional Features and Accessories	Automatic drop (retractable) arm, motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), coin slot and coin box, single/multiple intelligent coin/token slot and box, counter (with/without reset), card reader mounting bracket, photocell alarm sensor, passage completion sensor, contactless passage sensor (for motorized models), heater positive, top lid weight sensor, bottom plate, battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, top passage indicator, electrostatic powder coating on stainless steel.						

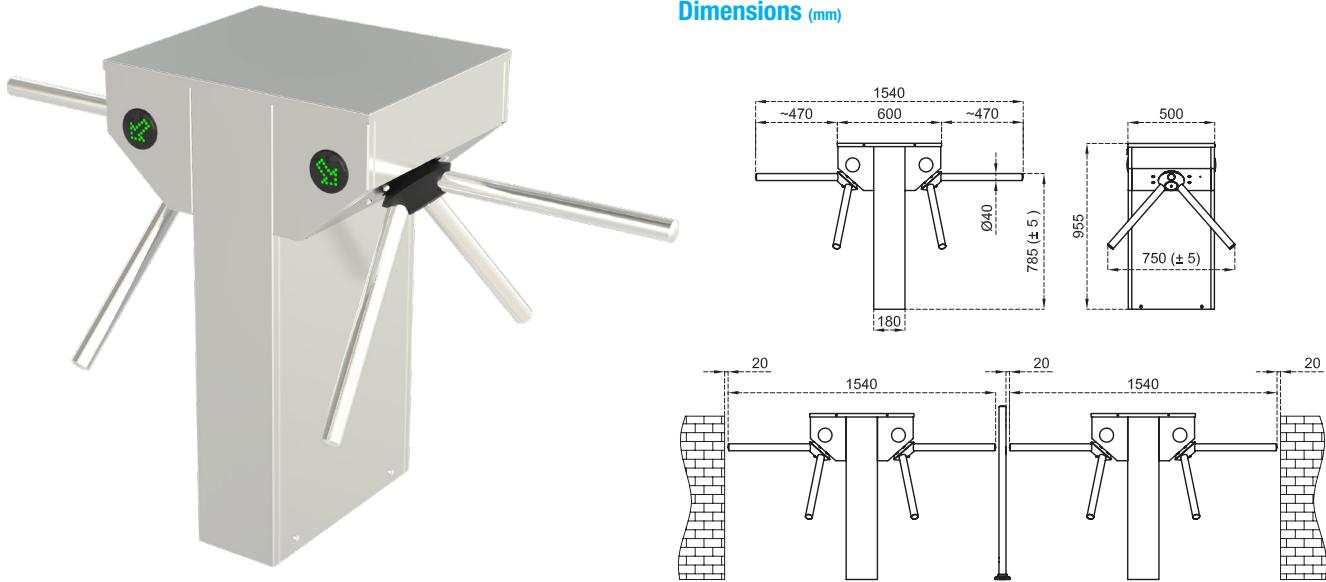


Technical Features

Place of Use	Indoors, outdoors	
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.	
Operating Intensity	100%, 7/24 use.	
Body Features	Material : 304 grade (opt. 316 grade) stainless steel. Finishing : Orbital brushed matt (opt. electrostatic powder coating on stainless steel).	
Arms	Automatic Drop (Retractable) Arm : Optional	
	Material : 040x2 mm 304 grade (opt. 316 grade) stainless steel, one by one demountable.	
	Finishing : Satine brushed (opt. orbital brushed matt, electrostatic powder coating on stainless steel)	
Indicators	Side Status / Direction Indicators : LED, standard.	
Power	Operating Voltage : 110/220V AC 50/60 Hz. (%±10), 24V DC. Consumption : ~6,2W at stand-by, during passage ~2,6+2,6W (varies according to the options and accessories used).	
Operating Modes	System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card. Entry - exit controlled Entry controlled, exit free Entry free, exit controlled Single input both directions use Entry - exit free	
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).	
Control System	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.	
Flow Rate	Capacity of mechanism (manual) : Max. 164 cycle/min. Nominal : ~60 pass/min. Capacity of mechanism (motorized) : Max. 150 cycle/min. Nominal : ~50 pass/min. (Passage rate can change depending on the access control system utilized)	
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.	
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.	
Weight	~46 kg	
Optional Features and Accessories	Automatic drop (retractable) arm, motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), coin slot and coin box, single/multiple intelligent coin/token slot and box, counter (with/without reset), card reader mounting bracket, photocell alarm sensor, passage completion sensor, contactless passage sensor (for motorized models), heater positive, top lid weight sensor, bottom plate, battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, top passage indicator, electrostatic powder coating on stainless steel.	





Dimensions (mm)

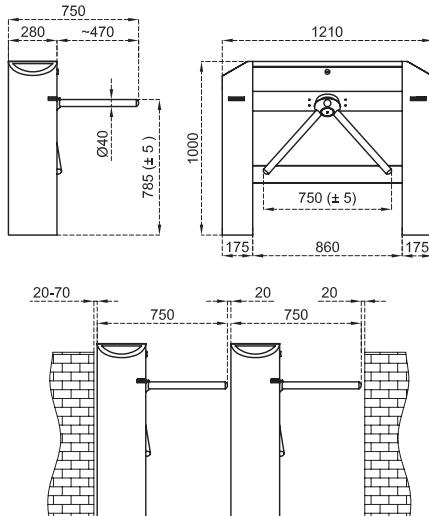

Technical Features


Place of Use	Indoors, outdoors						
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing..						
Operating Intensity	100%, 7/24 use.						
Body Features	<p>Material : 304 grade (opt. 316 grade) stainless steel.</p> <p>Finishing : Orbital brushed matt (opt. electrostatic powder coating on stainless steel).</p>						
Arms	<p>Automatic Drop (Retractable) Arm : Standard</p> <p>Material : Ø40x1,2 mm 304 grade (opt. 316 grade) stainless steel, one by one demountable.</p> <p>Finishing : Satin brushed (opt. orbital brushed matt, electrostatic powder coating on stainless steel).</p>						
Indicators	<p>Side Status /Direction Indicators : LED, standard.</p> <p>Top Passage Indicator : LED, standard.</p>						
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (%±10), 24V DC.</p> <p>Consumption : ~3,4W at stand-by, during passage ~2,7W (varies according to the options and accessories used).</p>						
Operating Modes	<p>System operates bi-directionally (entry-exit).</p> <p>Operating modes can be adjusted through the buttons and screen on the control card.</p> <table> <tr> <td>Entry - exit controlled</td> <td>Entry controlled, exit free</td> <td>Entry free, exit controlled</td> </tr> <tr> <td>Single input both directions use</td> <td>Entry - exit free</td> <td></td> </tr> </table>	Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled	Single input both directions use	Entry - exit free	
Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled					
Single input both directions use	Entry - exit free						
Operating System	Electromechanical motorized operation (opt. electromechanical manual operation).						
Control System	<p>All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card.</p> <p>All inputs are opto-coupler protected.</p> <p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available.</p>						
Flow Rate	<p>Capacity of mechanism (manual) : Max. 82 cycle/min. Nominal : ~30 pass/min.</p> <p>Capacity of mechanism (motorized) : Max. 75 cycle/min. Nominal : ~25 pass/min.</p> <p>(Passage rate can change depending on the access control system utilized)</p>						
Emergency Mode	System allows free passage (entry-exit) in both directions by the automatic drop arm (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.						
Power-off Situation	System allows free passage (entry-exit) in both directions by the automatic drop arm (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.						
Weight	~48 kg						
Optional Features and Accessories	Wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), coin slot and coin box, single/multiple intelligent coin/token slot and box, counter (with/without reset), card reader mounting bracket, photocell alarm sensor, passage completion sensor, contactless passage sensor, heater positive, top lid weight sensor, bottom plate, battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, electrostatic powder coating on stainless steel, motorized card collector unit and card collection box.						







Dimensions (mm)

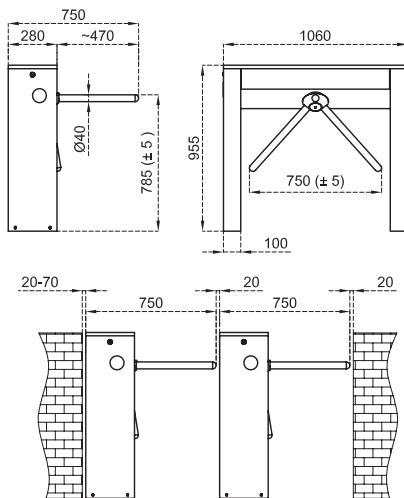


Technical Features

Place of Use	Indoors, outdoors	
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.	
Operating Intensity	100%, 7/24 use.	
Body Features	Material : 304 grade (opt. 316 grade) stainless steel. Finishing : Orbital brushed matt (opt. electrostatic powder coating on stainless steel).	
Arms	Automatic Drop (Retractable) Arm : Optional Material : Ø40x2 mm 304 grade (opt. 316 grade) stainless steel, one by one demountable. Finishing : Satine brushed (opt. orbital brushed matt, electrostatic powder coating on stainless steel).	
Indicators	Side Status /Direction Indicators : LED, standard.	
Power	Operating Voltage : 110/220V AC 50/60 Hz. (%±10), 24V DC. Consumption : ~3,1W at stand-by, during passage ~2,6W (varies according to the options and accessories used).	
Operating Modes	System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card. Entry - exit controlled Entry controlled, exit free Entry free, exit controlled Single input both directions use Entry - exit free	
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).	
Control System	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.	
Flow Rate	Capacity of mechanism (manual) : Max. 82 cycle/min. Nominal : ~30 pass/min. Capacity of mechanism (motorized) : Max. 75 cycle/min. Nominal : ~25 pass/min. (Passage rate can change depending on the access control system utilized)	
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.	
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.	
Weight	~35 kg	
Optional Features and Accessories	Automatic drop (retractable) arm, motor driven unit, top passage indicator, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), coin slot and coin box, single/multiple intelligent coin/token slot and box, counter (with/without reset), card reader mounting bracket, photocell alarm sensor, passage completion sensor, contactless passage sensor (for motorized models), heater positive, top lid weight sensor, bottom plate, battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, electrostatic powder coating on stainless steel, motorized card collector unit and card collection box.	



Dimensions (mm)

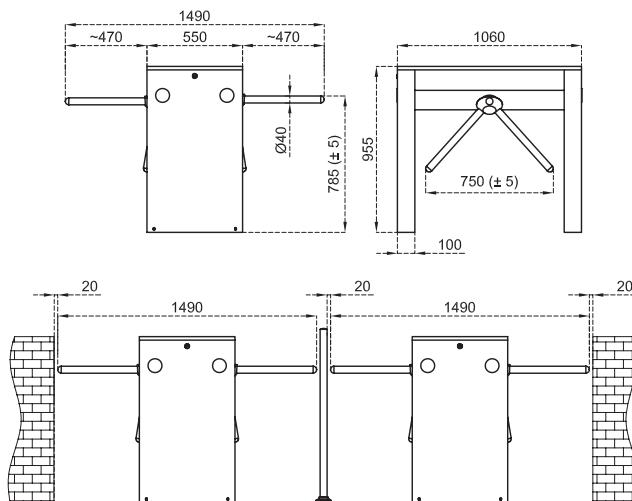

Technical Features

Place of Use	Indoors, outdoors	
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.	
Operating Intensity	100%, 7/24 use.	
Body Features	Material : 304 grade (opt. 316 grade) stainless steel. Finishing : Orbital brushed matt (opt. electrostatic powder coating on stainless steel).	
Arms	Automatic Drop (Retractable) Arm : Optional	
	Material : Ø40x2 mm 304 grade (opt. 316 grade) stainless steel, one by one demountable.	
	Finishing : Satin brushed (opt. orbital brushed matt, electrostatic powder coating on stainless steel).	
Indicators	Side Status /Direction Indicators : LED, standard.	
Power	Operating Voltage : 110/220V AC 50/60 Hz. (%±10), 24V DC. Consumption : ~6,2W at stand-by, during passage ~2,6+2,6W (varies according to the options and accessories used).	
Operating Modes	System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card. Entry - exit controlled Entry controlled, exit free Entry free, exit controlled Single input both directions use Entry - exit free	
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).	
Control System	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.	
Flow Rate	Capacity of mechanism (manual) : Max. 164 cycle/min. Nominal : ~60 pass/min. Capacity of mechanism (motorized) : Max. 150 cycle/min. Nominal : ~50 pass/min. (Passage rate can change depending on the access control system utilized)	
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.	
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.	
Weight	~64 kg	
Optional Features and Accessories	Automatic drop (retractable) arm, motor driven unit, top passage indicator, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), coin slot and coin box, single/multiple intelligent coin/token slot and box, counter (with/without reset), card reader mounting bracket, photocell alarm sensor, passage completion sensor, contactless passage sensor (for motorized models), heater positive, top lid weight sensor, bottom plate, battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, electrostatic powder coating on stainless steel, motorized card collector unit and card collection box.	








TURNSTILES FOR REDUCED MOBILITY

32	605
33	605 D
34	705 E N1
35	705 E N1 D




Dimensions (mm)

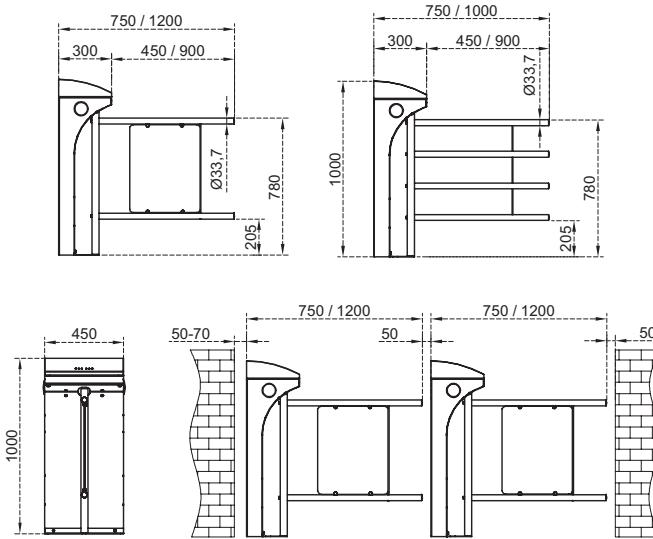

Technical Features




Dimensions (mm)

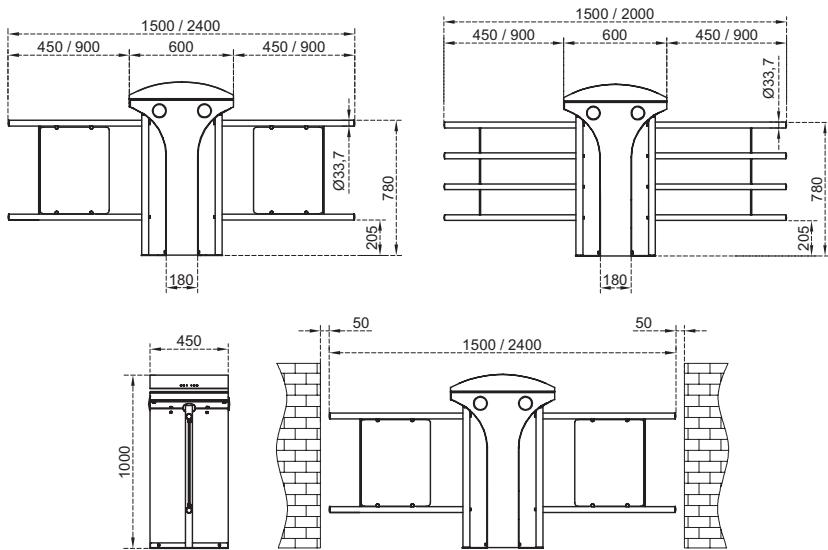

Technical Features



Dimensions (mm)

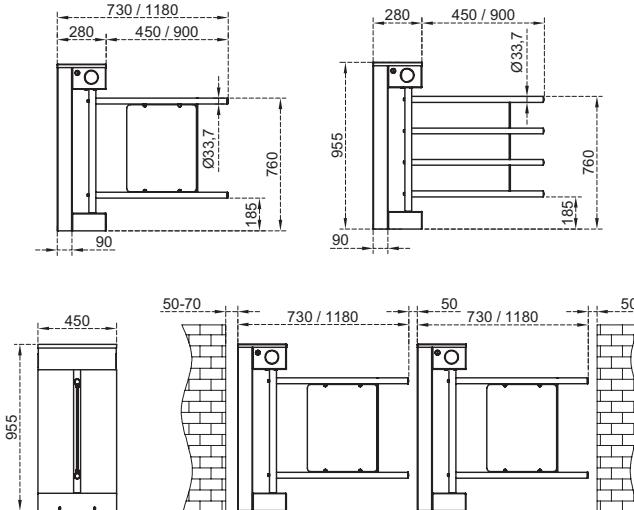


Technical Features

Place of Use	Indoors, outdoors (with wing adaptation)
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.
Operating Intensity	100%, 7/24 use.
Body Features	<p>Material : 304 grade (opt. 316 grade) stainless steel.</p> <p>Finishing : Orbital brushed matt (opt. electrostatic powder coating on stainless steel).</p>
Wing	<p>Material : Ø33,7x1,5 mm 304 grade stainless steel pipe with acrylic infill (for indoor use), Ø33,7x1,5 mm 304 grade stainless steel pipe (for outdoor use).</p> <p>Finishing : Satine brushed (opt. orbital brushed matt, electrostatic powder coating on stainless steel).</p>
Indicators	Side Status/Direction Indicators : LED, standard.
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC.</p> <p>Consumption : ~5W at stand-by, max ~40W (varies according to the options and accessories used).</p>
Operating Modes	<p>System operates bi-directionally (entry-exit).</p> <p>Operating modes can be adjusted through the buttons and screen on the control card.</p> <p>Entry - exit controlled Entry - exit free (with optional photocell)</p> <p>Entry controlled, exit free (with optional photocell) Exit controlled, entry free (with optional photocell)</p>
Operating System	Electromechanical motorized operation.
Control System	<p>All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card.</p> <p>All inputs are opto-coupler protected.</p> <p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available.</p>
Flow Rate	Wing opening / closing time : ~1,5 sec.
Emergency Mode	System provides a free passageway (entry-exit) by opening the wing in preferred direction configured by dip switch (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.
Power-off Situation	System provides a free passageway (entry-exit) by manually pushing the wing towards entry or exit directions (fail safe). Optionally, can be set as entry-exit locked (fail secure).
Weight	~33 kg
Optional Features and Accessories	Wireless remote control (receiver-transmitter), manual control, counter (with/without reset), card reader mounting bracket, heater positive, bottom plate, battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, photocell for free mode, top passage indicator, electrostatic powder coating on stainless steel.



Dimensions (mm)

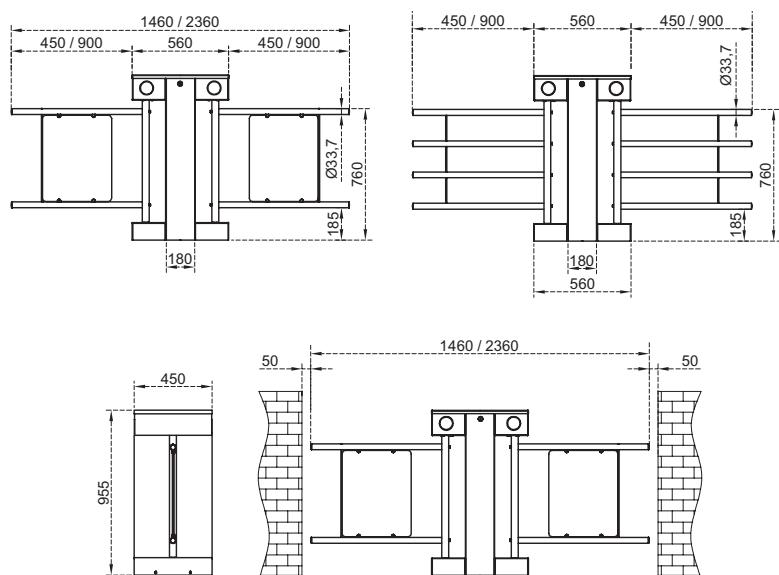

Technical Features

Place of Use	Indoors, outdoors (with wing adaptation)
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.
Operating Intensity	100%, 7/24 use.
Body Features	Material : 304 grade (opt. 316 grade) stainless steel. Finishing : Orbital brushed matt (opt. electrostatic powder coating on stainless steel).
Wing	Material : Ø33,7x1,5 mm 304 grade stainless steel pipe with acrylic infill (for indoor use), Ø33,7x1,5 mm 304 grade stainless steel pipe (for outdoor use). Finishing : Satin brushed (opt. orbital brushed matt, electrostatic powder coating on stainless steel).
Indicators	Side Status/Direction Indicators : LED, standard.
Power	Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC. Consumption : ~10W at stand-by, max ~40+40W (varies according to the options and accessories used).
Operating Modes	System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card. Entry - exit controlled Entry - exit free (with optional photocell) Entry controlled, exit free (with optional photocell) Exit controlled, entry free (with optional photocell)
Operating System	Electromechanical motorized operation.
Control System	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.
Flow Rate	Wing opening / closing time : ~1,5 sec.
Emergency Mode	System provides a free passageway (entry-exit) by opening the wing in preferred direction configured by dip switch (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.
Power-off Situation	System provides a free passageway (entry-exit) by manually pushing the wing towards entry or exit directions (fail safe). Optionally, can be set as entry-exit locked (fail secure).
Weight	~53 kg
Optional Features and Accessories	Wireless remote control (receiver-transmitter), manual control, counter (with/without reset), card reader mounting bracket, heater positive, bottom plate, battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, photocell for free mode, top passage indicator, electrostatic powder coating on stainless steel.





GİRİŞ

GİRİŞ




FREE PASSAGE TURNSTILES

40 SWG 101
41 MRKT 404

CAME  **ÖZAK**



Dimensions (mm)

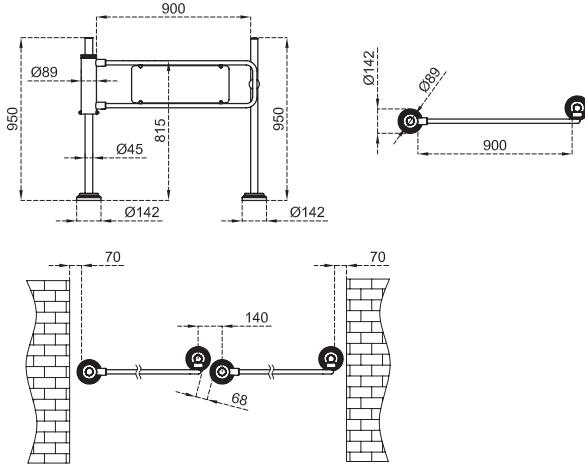


Technical Features

Place of Use	Indoors, outdoors.
Operating Intensity	100%, 7/24 use.
Body Features	Material : Ø89x3 mm 304 grade stainless steel. Finishing : Satine brushed (opt. orbital brushed matt, electrostatic powder coating on stainless steel).
Wing	Material : Ø27x2 mm 304 grade stainless steel pipe with acrylic infill. Finishing : Satine brushed (opt. orbital brushed matt, electrostatic powder coating on stainless steel).
Power	Operating Voltage : No power for standard model (opt. 24V DC (250mA) for 35 kg elecromagnetic lock).
Operating Mode	System operates uni-directionally (clockwise or counter clockwise). Wing opening 90° by pushing comes back to its original position thanks to the spring system ensuring the closing of the wing.
Operating System	Mechanical manual operation.
Emergency Mode	Electromagnetic lock (if any) is deactivated during the emergency contact, and the wing is pushed manually to create a free passageway.
Power-off Situation	Electromagnetic lock (if any) becomes disabled, and the wing is pushed manually to create a free passageway.
Weight	~15 kg
Optional Features and Accessories	Electromagnetic lock, wireless remote control (receiver-transmitter, with electromagnetic lock option), manual control (with electromagnetic lock option), key lock pole, bottom plate, electrostatic powder coating on stainless steel.



Dimensions (mm)

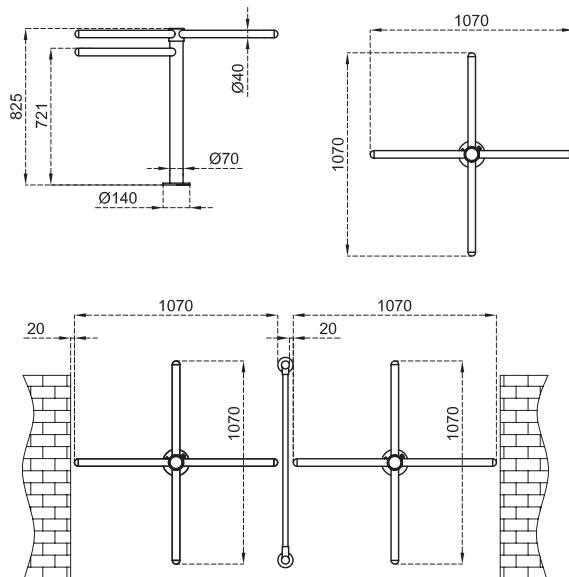

Technical Features

Place of Use	Indoors, outdoors.
Operating Intensity	100%, 7/24 use.
Body Features	Material : Ø70x2 mm 304 grade stainless steel. Finishing : Satine brushed (opt. orbital brushed matt, electrostatic powder coating on stainless steel).
Arms	Material : Ø40x2 mm 304 grade stainless steel pipe, Ø42x2,5 mm red painted steel anti-return arm Finishing : Satine brushed (opt. orbital brushed matt, electrostatic powder coating on stainless steel).
Operating Mode	System operates uni-directionally (clockwise or counter clockwise).
Operating System	Manual operation turning by pushing.
Weight	~15 kg
Optional Features and Accessories	Bottom plate



SPEED GATES

44	HG 01
46	HG 02 EU
50	HG 02 DP EU
52	SG 55 SLIDING GATE
56	SG 90 SLIDING GATE
58	PG 03 55 PADDLE GATE
60	PG 03 90 PADDLE GATE




Technical Features





Place of Use	Indoors.						
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.						
Operating Intensity	100%, 7/24 use.						
Material Specifications	<table border="1"> <tbody> <tr> <td>Body</td><td>304 grade (opt. 316 grade) satin brushed stainless steel.</td></tr> <tr> <td>Top Lid</td><td>10 mm black tempered glass (opt. other materials), choice of top lid hollowed for surface mounted access control device is also available.</td></tr> <tr> <td>Wings</td><td>RGB LED illuminated 10 mm tempered glass.</td></tr> </tbody> </table>	Body	304 grade (opt. 316 grade) satin brushed stainless steel.	Top Lid	10 mm black tempered glass (opt. other materials), choice of top lid hollowed for surface mounted access control device is also available.	Wings	RGB LED illuminated 10 mm tempered glass.
Body	304 grade (opt. 316 grade) satin brushed stainless steel.						
Top Lid	10 mm black tempered glass (opt. other materials), choice of top lid hollowed for surface mounted access control device is also available.						
Wings	RGB LED illuminated 10 mm tempered glass.						
Indicators	<p>Side Status / Direction Indicators : DOT MATRIX LED, standard.</p> <p>Passage Indicator : RGB LED under top lid and wings standard (opt. sliding asteroid animated LED indicators on top lid).</p>						
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC.</p> <p>Consumption (single) : 5W at stand-by, max ~51W</p> <p>Consumption (center) : 10W at stand-by, max ~51+51W (varies according to the options and accessories used)</p>						
Operating Modes	<p>System operates bi-directionally (entry-exit).</p> <p>Operation modes can be changed through dip switch.</p> <table> <tbody> <tr> <td>Entry - exit controlled</td> <td>Entry - exit free</td> </tr> <tr> <td>Entry controlled, exit free</td> <td>Exit controlled, entry free</td> </tr> </tbody> </table>	Entry - exit controlled	Entry - exit free	Entry controlled, exit free	Exit controlled, entry free		
Entry - exit controlled	Entry - exit free						
Entry controlled, exit free	Exit controlled, entry free						
Operating System	<p>Electromechanical motorised system with electronic torque and sensor controls that provides wing movement retracting inside the body for rapid passages.</p> <p>A passage lane consists of min. 2 pieces of single units facing each other.</p> <p>Electromechanical motorized wings are closed at stand-by. Person requests authorisation from the access control device (3rd party device) connected to the gate's entry system. Upon authorisation, wings open, passage of the person is monitored by the multi-sensors along the passageway and wings close upon completion of the passage. In case of subsequent access authorisations, wings keep open until the last person completes his passage and then close.</p> <p>Wings do not move and do not harm the person in case the person is between the wings thanks to the ATS sensors. In addition, electronic torque control system is continuously active during closing of the wings.</p> <p>Systems generates audio/visual alarm in case of tailgating or illegal passage attempts.</p> <p>System message codes can be monitored from the internal diagnostic screen.</p>						
Control System	<p>All functions, parameters and operating modes can be changed through the control board (microprocessor controlled).</p> <p>All inputs are opto-coupler protected.</p> <p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available.</p>						
Flow Rate	<p>Wing opening / closing time : ~0,8 sec.</p> <p>Free passage mode : ~60 pass/min. Nominal : ~30 pass/min. (passage rate can change depending on the access control system utilized)</p>						
Emergency Mode	Wings provide a free passageway by automatically retracting inside the body (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.						
Power-off Situation	Wings provide a free passageway by automatically retracting inside the body through internal battery (fail safe).						
Weight	<p>Single : ~110 kg</p> <p>Center : ~125 kg</p>						
Optional Features and Accessories	Wireless remote control (receiver-transmitter), manual control, coin slot and coin box, single/multiple intelligent coin/token slot and box, card reader mounting bracket, heater positive, bottom plate, battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, sliding asteroid animated LED indicator, different outer body materials (mirror black, bronze, etc), motorized card collector unit and card collection box, different top lid materials (stainless steel, natural granite, etc.).						

Dimensions (mm)

HG 01-S : SINGLE UNIT (LEFT or RIGHT)

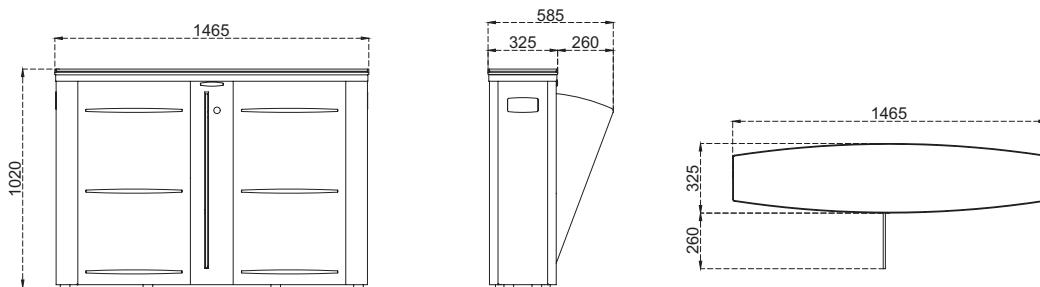

HG 01-C: CENTER UNIT

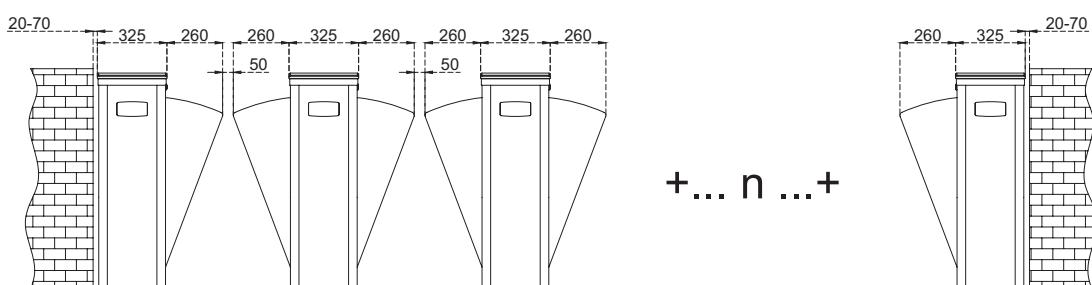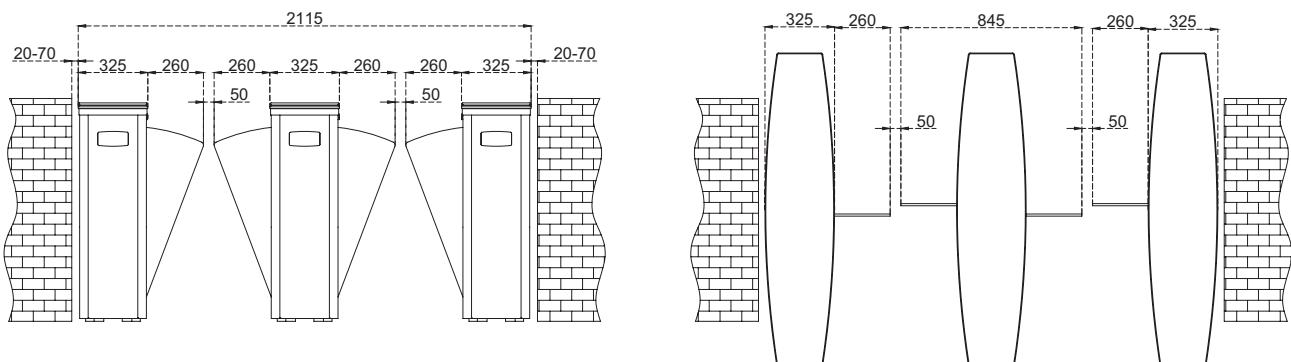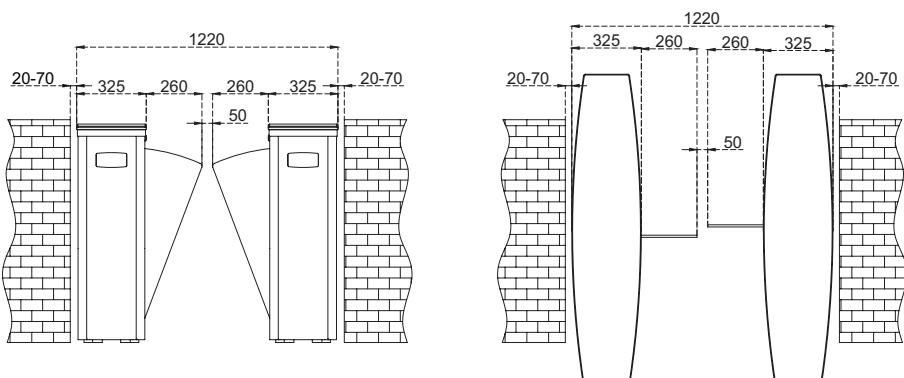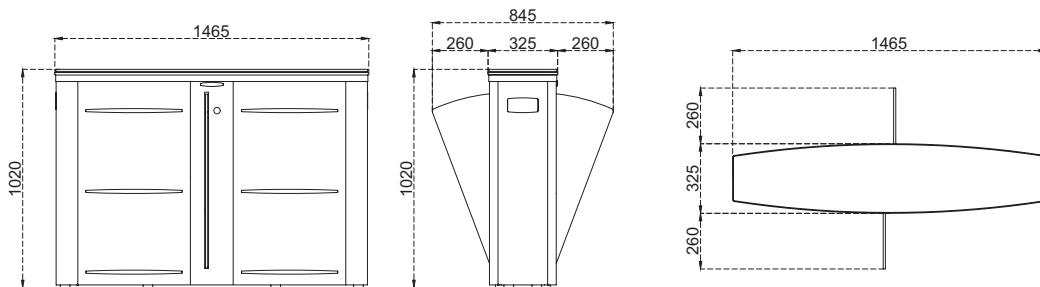




Technical Features





Place of Use	Indoors.						
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.						
Operating Intensity	100%, 7/24 use.						
Material Specifications	<table border="1"> <tbody> <tr> <td>Body</td><td>304 grade (opt. 316 grade) satin brushed stainless steel.</td></tr> <tr> <td>Top Lid</td><td>Lockable 10 mm black tempered glass (opt. other materials), choice of top lid hollowed for surface mounted access control device is also available.</td></tr> <tr> <td>Wings</td><td>RGB LED illuminated 10 mm tempered glass.</td></tr> </tbody> </table>	Body	304 grade (opt. 316 grade) satin brushed stainless steel.	Top Lid	Lockable 10 mm black tempered glass (opt. other materials), choice of top lid hollowed for surface mounted access control device is also available.	Wings	RGB LED illuminated 10 mm tempered glass.
Body	304 grade (opt. 316 grade) satin brushed stainless steel.						
Top Lid	Lockable 10 mm black tempered glass (opt. other materials), choice of top lid hollowed for surface mounted access control device is also available.						
Wings	RGB LED illuminated 10 mm tempered glass.						
Indicators	Passage / Direction Indicators : RGB LED under top lid and wings standard (opt. sliding asteroid animated LED indicators on top lid).						
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC.</p> <p>Consumption (single) : 4W at stand-by, max ~34W</p> <p>Consumption (center) : 8W at stand-by, max ~34+34W (varies according to the options and accessories used)</p>						
Operating Modes	<p>System operates bi-directionally (entry-exit).</p> <p>Operation modes can be changed through dip switch.</p> <table> <tr> <td>Entry - exit controlled</td> <td>Entry - exit free</td> </tr> <tr> <td>Entry controlled, exit free</td> <td>Exit controlled, entry free</td> </tr> </table>	Entry - exit controlled	Entry - exit free	Entry controlled, exit free	Exit controlled, entry free		
Entry - exit controlled	Entry - exit free						
Entry controlled, exit free	Exit controlled, entry free						
Operating System	<p>Electromechanical motorised system with electronic torque and sensor controls that provides wing movement retracting inside the body for rapid passages.</p> <p>A passage lane consists of min. 2 pieces of single units facing each other.</p> <p>Electromechanical motorized wings are closed at stand-by. Person requests authorisation from the access control device (3rd party device) connected to the gate's entry system. Upon authorisation, wings open, passage of the person is monitored by the multi-sensors along the passageway and wings close upon completion of the passage. In case of subsequent access authorisations, wings keep open until the last person completes his passage and then close.</p> <p>Wings do not move and do not harm the person in case the person is between the wings thanks to the sensors. In addition, electronic torque control system is continuously active during closing of the wings.</p> <p>Systems generates audio/visual alarm in case of tailgating or illegal passage attempts.</p> <p>System message codes can be monitored from the internal diagnostic screen.</p>						
Control System	<p>All functions, parameters and operating modes can be changed through the control board (microprocessor controlled).</p> <p>All inputs are opto-coupler protected.</p> <p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available.</p>						
Flow Rate	<p>Wing opening / closing time : ~0,8 sec.</p> <p>Free passage mode : ~60 pass/min. Nominal : ~30 pass/min. (passage rate can change depending on the access control system utilized)</p>						
Emergency Mode	Wings provide a free passageway by automatically retracting inside the body (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.						
Power-off Situation	Wings provide a free passageway by automatically retracting inside the body through internal battery (fail safe).						
Weight	<p>Single : ~65 kg</p> <p>Center : ~80 kg</p>						
Optional Features and Accessories	Wireless remote control (receiver-transmitter), manual control, card reader mounting bracket, heater positive, top lid weight sensor, bottom plate, battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, sliding asteroid animated LED indicator, different outer body materials (mirror black, bronze, etc), motorized card collector unit and card collection box.						

Dimensions (mm)

HG 02 EU : SINGLE UNITE (LEFT OR RIGHT)

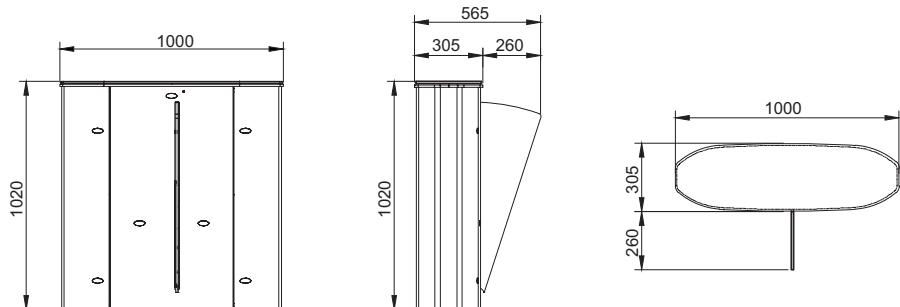

HG 02 EU: CENTER UNITE

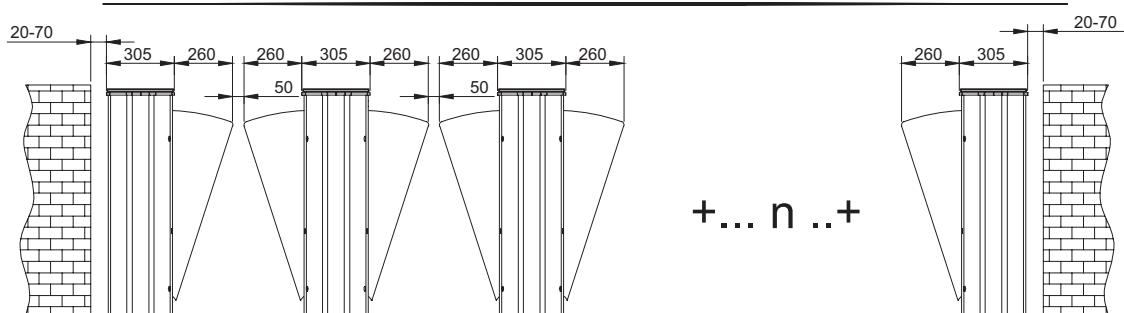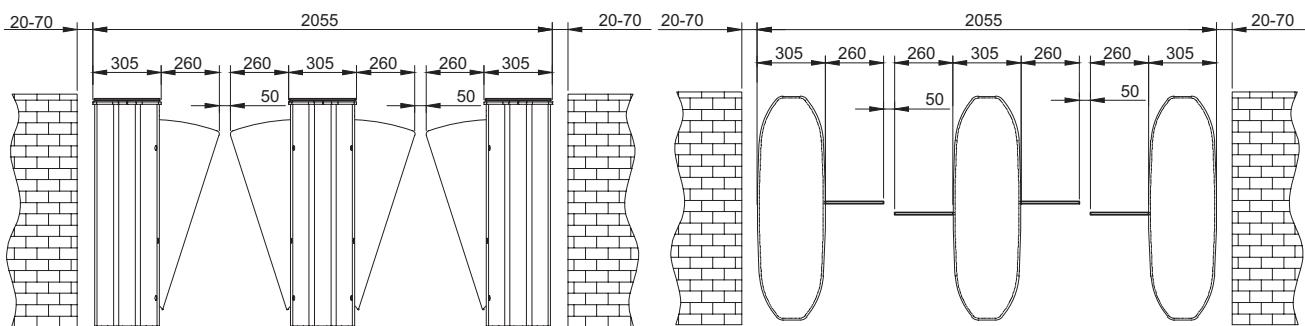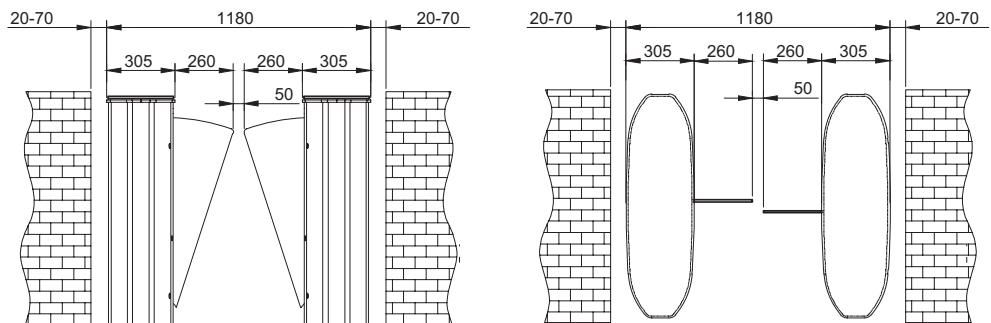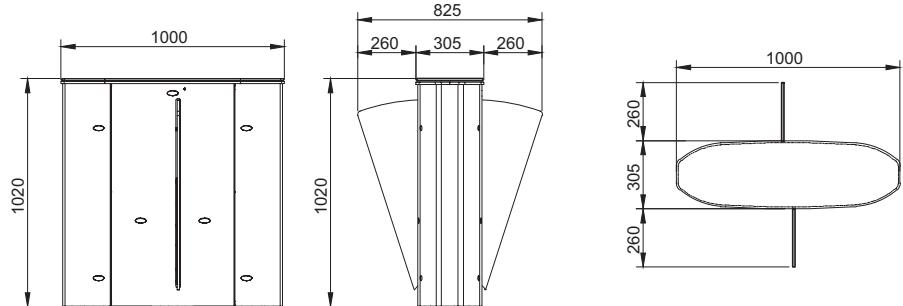








Technical Features










Place of Use	Indoors.						
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.						
Operating Intensity	100%, 7/24 use.						
Material Specifications	<table border="1"> <tr> <td>Body</td><td>304 grade (opt. 316 grade) satin brushed stainless steel.</td></tr> <tr> <td>Top Lid</td><td>Lockable 10 mm black tempered glass (opt. other materials), choice of top lid hollowed for surface mounted access control device is also available.</td></tr> <tr> <td>Wings</td><td>RGB LED illuminated 10 mm tempered glass.</td></tr> </table>	Body	304 grade (opt. 316 grade) satin brushed stainless steel.	Top Lid	Lockable 10 mm black tempered glass (opt. other materials), choice of top lid hollowed for surface mounted access control device is also available.	Wings	RGB LED illuminated 10 mm tempered glass.
Body	304 grade (opt. 316 grade) satin brushed stainless steel.						
Top Lid	Lockable 10 mm black tempered glass (opt. other materials), choice of top lid hollowed for surface mounted access control device is also available.						
Wings	RGB LED illuminated 10 mm tempered glass.						
Indicators	Passage / Direction Indicators : RGB LED under top lid and wings standard (opt. sliding asteroid animated LED indicators on top lid).						
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC.</p> <p>Consumption (single) : 4W at stand-by, max ~80W</p> <p>Consumption (center) : 8W at stand-by, max ~80+80W (varies according to the options and accessories used)</p>						
Operating Modes	<p>System operates bi-directionally (entry-exit).</p> <p>Operation modes can be changed through dip switch.</p> <table> <tr> <td>Entry - exit controlled</td> <td>Entry - exit free</td> </tr> <tr> <td>Entry controlled, exit free</td> <td>Exit controlled, entry free</td> </tr> </table>	Entry - exit controlled	Entry - exit free	Entry controlled, exit free	Exit controlled, entry free		
Entry - exit controlled	Entry - exit free						
Entry controlled, exit free	Exit controlled, entry free						
Operating System	<p>Suitable for passage with wheelchairs, suitcases and trolleys with clear passage width up to 900 mm.</p> <p>Electromechanical motorised system with electronic torque and sensor controls that provides wing movement retracting inside the body for rapid passages.</p> <p>A passage lane consists of min. 2 pieces of single units facing each other.</p> <p>Electromechanical motorized wings are closed at stand-by. Person requests authorisation from the access control device (3rd party device) connected to the gate's entry system. Upon authorisation, wings open, passage of the person is monitored by the multi-sensors along the passageway and wings close upon completion of the passage. In case of subsequent access authorisations, wings keep open until the last person completes his passage and then close.</p> <p>Wings do not move and do not harm the person in case the person is between the wings thanks to the sensors. In addition, electronic torque control system is continuously active during closing of the wings.</p> <p>Systems generates audio/visual alarm in case of tailgating or illegal passage attempts.</p> <p>System message codes can be monitored from the internal diagnostic screen.</p>						
Control System	<p>All functions, parameters and operating modes can be changed through the control board (microprocessor controlled).</p> <p>All inputs are opto-coupler protected.</p> <p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available.</p>						
Flow Rate	<p>Wing opening / closing time : ~0,8 sec.</p> <p>Free passage mode : ~60 pass/min. Nominal : ~30 pass/min. (passage rate can change depending on the access control system utilized)</p>						
Emergency Mode	Wings provide a free passageway by automatically retracting inside the body (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.						
Power-off Situation	Wings provide a free passageway by automatically retracting inside the body through internal battery (fail safe).						
Weight	Single : ~70 kg Center : ~85 kg						
Optional Features and Accessories	Wireless remote control (receiver-transmitter), manual control, card reader mounting bracket, heater positive, top lid weight sensor, bottom plate, battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, sliding asteroid animated LED indicator, different outer body materials (mirror black, bronze, etc), motorized card collector unit and card collection box.						

Dimensions (mm)

HG 02 DP EU: SINGLE UNITE (LEFT OR RIGHT)

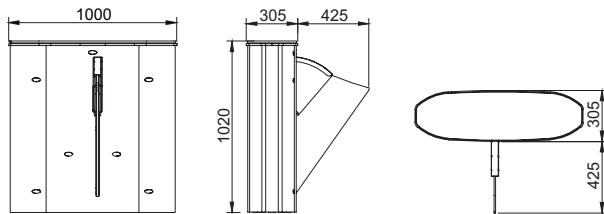

HG 02 DP EU: CENTER UNITE

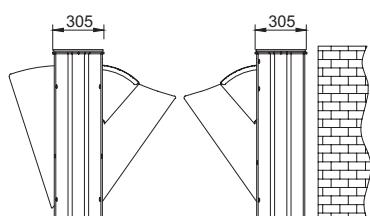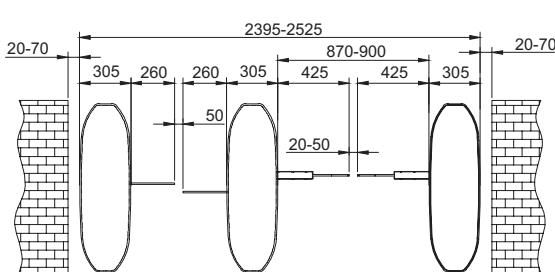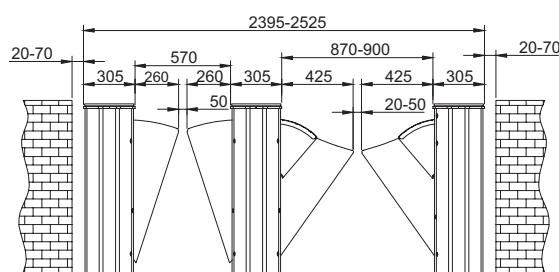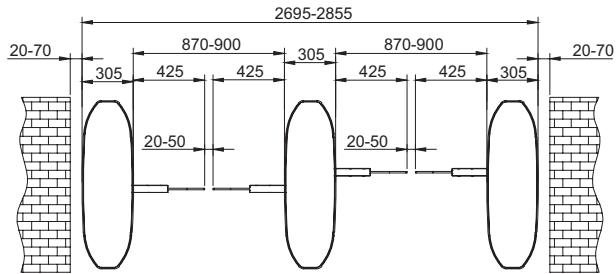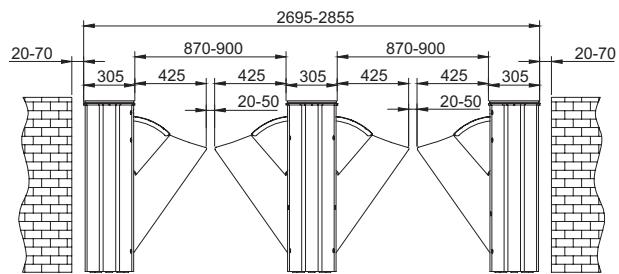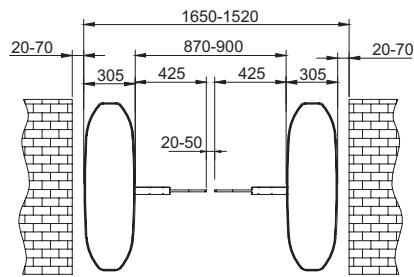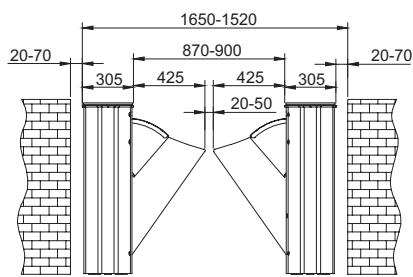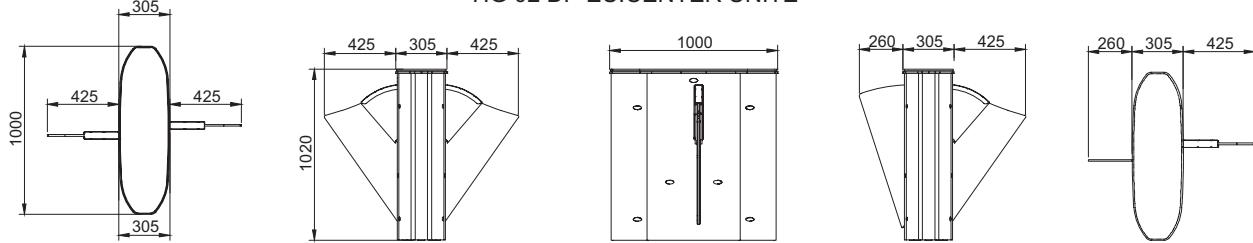

SG 55 SLIDING GATE





Technical Features


Place of Use	Indoors.
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.
Operating Intensity	100%, 7/24 use.
Material Specifications	
Body	304 grade (opt. 316 grade) satin brushed stainless steel.
Top Lid	10 mm black tempered glass (opt. other materials), choice of top lid hollowed for surface mounted access control device is also available.
Wings	RGB LED illuminated 10 mm tempered glass with 900-1200-2000 mm wing height options.
Indicators	
Side Status / Direction Indicators	:  DOT MATRIX LED, standard.
Passage Indicator	: RGB LED under top lid and wings standard.
Power	
Operating Voltage	: 110/220V AC 50/60 Hz. (±10%), 24V DC.
Consumption (single)	: 11W at stand-by, max ~45W
Consumption (center)	: 22W at stand-by, max ~45+45W (varies according to the options and accessories used)
Operating Modes	
System operates bi-directionally (entry-exit).	
Operation modes can be changed through dip switch.	
Entry - exit controlled	Entry - exit free
Entry controlled, exit free	Exit controlled, entry free
Operating System	
Electromechanical motorised system with electronic torque and sensor controls that provides wing movement retracting inside the body for rapid passages.	
A passage lane consists of min. 2 pieces of single units facing each other.	
Electromechanical motorized wings are closed at stand-by. Person requests authorisation from the access control device (3rd party device) connected to the gate's entry system. Upon authorisation, wings open, passage of the person is monitored by the multi-sensors along the passageway and wings close upon completion of the passage. In case of subsequent access authorisations, wings keep open until the last person completes his passage and then close.	
Wings do not move and do not harm the person in case the person is between the wings thanks to the sensors. In addition, electronic torque control system is continuously active during closing of the wings.	
Sensors along the passageway detects suitcase providing secure and comfortable passages.	
Systems generates audio/visual alarm in case of tailgating or illegal passage attempts.	
System message codes can be monitored from the internal diagnostic screen.	
Control System	
All functions, parameters and operating modes can be changed through the control board (microprocessor controlled).	
All inputs are opto-coupler protected.	
Controllable by dry contact (ground control).	
Compatible with all kinds of access control device.	
Optional RS232, RS485 or TCP/IP module is available.	
Flow Rate	
Wing opening / closing time : ~0,8-1,2 sec.	
Free passage mode : ~60 pass/min.	Nominal : ~30 pass/min.
(passage rate can change depending on the access control system utilized)	
Emergency Mode	
Wings provide a free passageway by automatically retracting inside the body (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.	
Power-off Situation	
Wings provide a free passageway by automatically retracting inside the body through internal battery (fail safe).	
Weight	
Single : ~150 kg	
Center : ~180 kg	
Optional Features and Accessories	
Wireless remote control (receiver-transmitter), manual control, coin slot and coin box, single/multiple intelligent coin/token slot and box, card reader mounting bracket, heater positive, bottom plate, battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, different outer body materials (mirror black, bronze, etc), different wing heights, motorized card collector unit and card collection box, different top lid materials (stainless steel, natural granite, etc.).	

*Design and specifications are subject to change without notice.


Dimensions (mm)

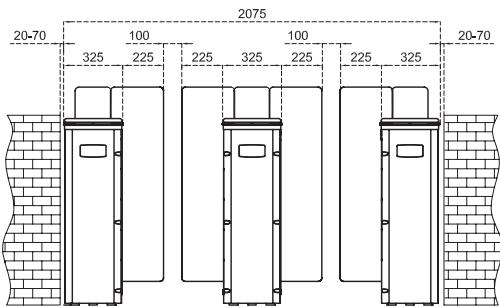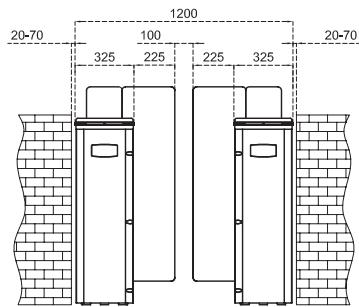


SG 55 S-S
Glass Wing Height : 900 mm

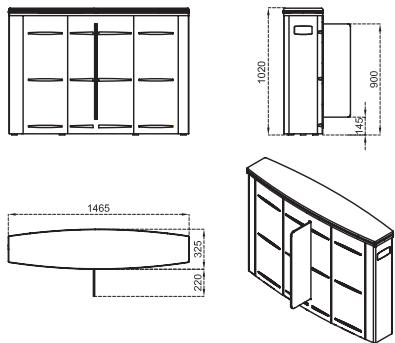


SG 55 S-C
Glass Wing Height : 900 mm

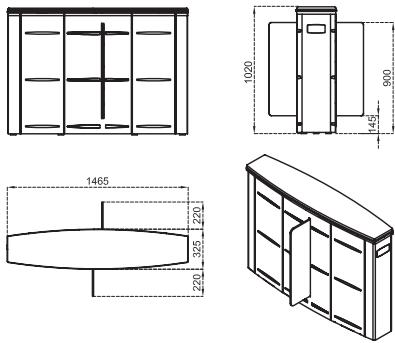


SG 55 M-S
Glass Wing Height : 1200 mm

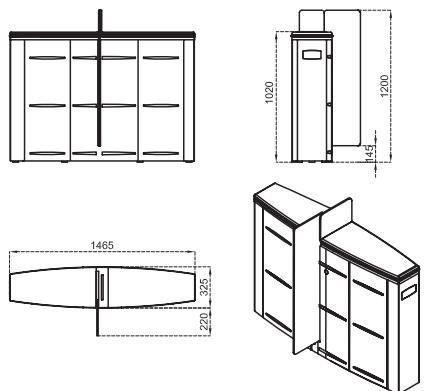


SG 55 M-C
Glass Wing Height : 1200 mm

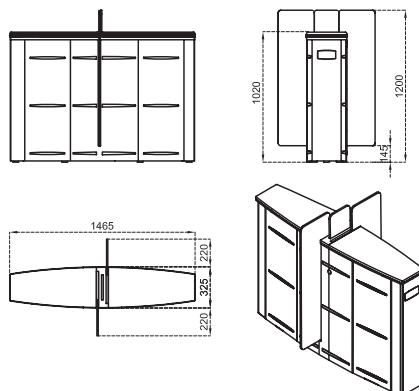

SG 55 T-S
Glass Wing Height : 2000 mm

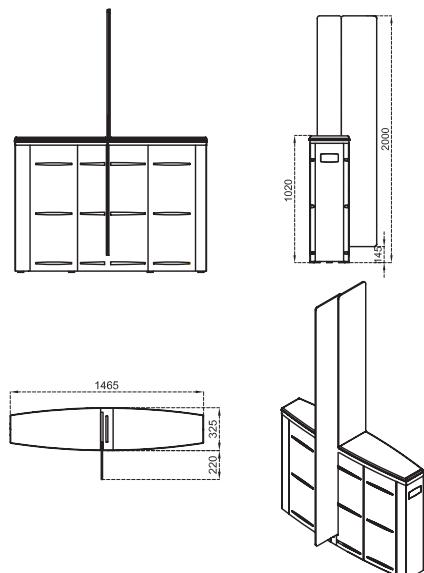

SG 55 T-C
Glass Wing Height : 2000 mm

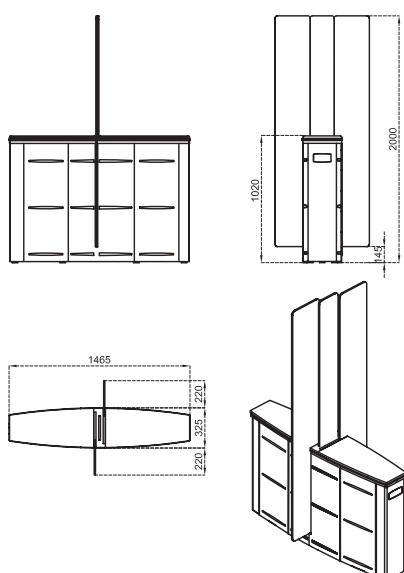






SG 90 SLIDING GATE



Technical Features


Place of Use	Indoors.						
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.						
Operating Intensity	100%, 7/24 use.						
Material Specifications	<table border="1"> <tbody> <tr> <td>Body</td><td>304 grade (opt. 316 grade) satin brushed stainless steel.</td></tr> <tr> <td>Top Lid</td><td>10 mm black tempered glass (opt. other materials), choice of top lid hollowed for surface mounted access control device is also available.</td></tr> <tr> <td>Wings</td><td>RGB LED illuminated 10 mm tempered glass with 900-1200-2000 mm wing height options.</td></tr> </tbody> </table>	Body	304 grade (opt. 316 grade) satin brushed stainless steel.	Top Lid	10 mm black tempered glass (opt. other materials), choice of top lid hollowed for surface mounted access control device is also available.	Wings	RGB LED illuminated 10 mm tempered glass with 900-1200-2000 mm wing height options.
Body	304 grade (opt. 316 grade) satin brushed stainless steel.						
Top Lid	10 mm black tempered glass (opt. other materials), choice of top lid hollowed for surface mounted access control device is also available.						
Wings	RGB LED illuminated 10 mm tempered glass with 900-1200-2000 mm wing height options.						
Indicators	<p>Side Status / Direction Indicators : DOT MATRIX LED, standard.</p> <p>Passage Indicator : RGB LED under top lid and wings standard.</p>						
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC.</p> <p>Consumption (single) : 11W at stand-by, max ~50W</p> <p>Consumption (center) : 22W at stand-by, max ~50+50W (varies according to the options and accessories used)</p>						
Operating Modes	<p>System operates bi-directionally (entry-exit).</p> <p>Operation modes can be changed through dip switch.</p> <table> <tr> <td>Entry - exit controlled</td> <td>Entry - exit free</td> </tr> <tr> <td>Entry controlled, exit free</td> <td>Exit controlled, entry free</td> </tr> </table>	Entry - exit controlled	Entry - exit free	Entry controlled, exit free	Exit controlled, entry free		
Entry - exit controlled	Entry - exit free						
Entry controlled, exit free	Exit controlled, entry free						
Operating System	<p>Suitable for passage with wheelchairs, suitcases and trolleys with clear passage width up to 900 mm.</p> <p>Electromechanical motorised system with electronic torque and sensor controls that provides wing movement retracting inside the body for rapid passages.</p> <p>A passage lane consists of min. 2 pieces of single units facing each other.</p> <p>Electromechanical motorized wings are closed at stand-by. Person requests authorisation from the access control device (3rd party device) connected to the gate's entry system. Upon authorisation, wings open, passage of the person is monitored by the multi-sensors along the passageway and wings close upon completion of the passage. In case of subsequent access authorisations, wings keep open until the last person completes his passage and then close.</p> <p>Wings do not move and do not harm the person in case the person is between the wings thanks to the sensors. In addition, electronic torque control system is continuously active during closing of the wings.</p> <p>Sensors along the passageway detects suitcase providing secure and comfortable passages.</p> <p>Systems generates audio/visual alarm in case of tailgating or illegal passage attempts.</p> <p>System message codes can be monitored from the internal diagnostic screen.</p>						
Control System	<p>All functions, parameters and operating modes can be changed through the control board (microprocessor controlled).</p> <p>All inputs are opto-coupler protected.</p> <p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available.</p>						
Flow Rate	<p>Wing opening / closing time : ~1,3-1,6 sec.</p> <p>Free passage mode : ~50 pass/min. Nominal : ~25 pass/min. (passage rate can change depending on the access control system utilized)</p>						
Emergency Mode	Wings provide a free passageway by automatically retracting inside the body (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.						
Power-off Situation	Wings provide a free passageway by automatically retracting inside the body through internal battery (fail safe).						
Weight	<p>Single : ~190 kg</p> <p>Center : ~250 kg</p>						
Optional Features and Accessories	Wireless remote control (receiver-transmitter), manual control, coin slot and coin box, single/multiple intelligent coin/token slot and box, card reader mounting bracket, heater positive, bottom plate, battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, different outer body materials (mirror black, bronze, etc), different wing heights, motorized card collector unit and card collection box, different top lid materials (stainless steel, natural granite, etc.).						

Dimensions (mm)

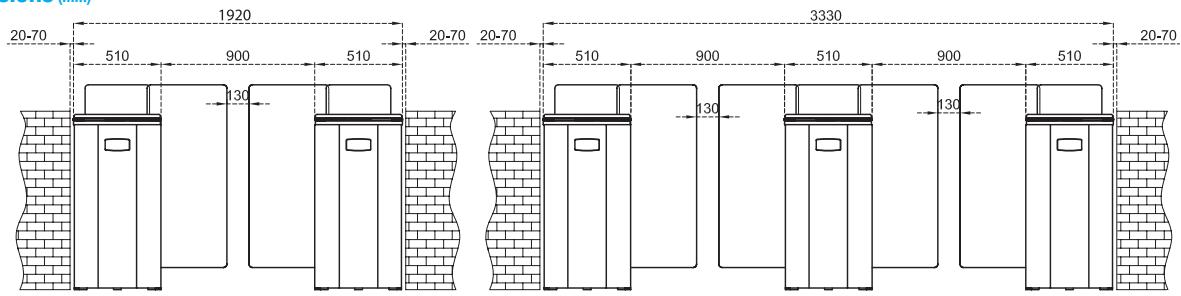


SG 90 S-S
Glass Wing Height: 900 mm

SG 90 S-C
Glass Wing Height: 900 mm

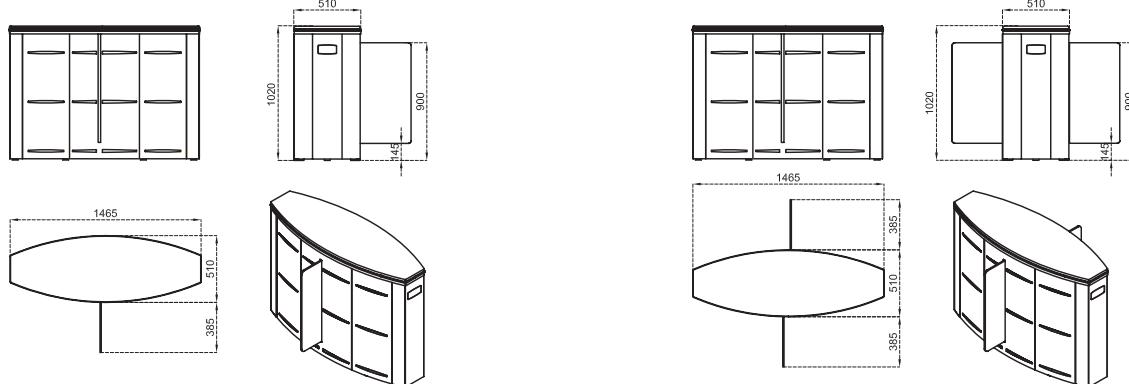


SG 90 M-S
Glass Wing Height: 1200 mm

SG 90 M-C
Glass Wing Height: 1200 mm

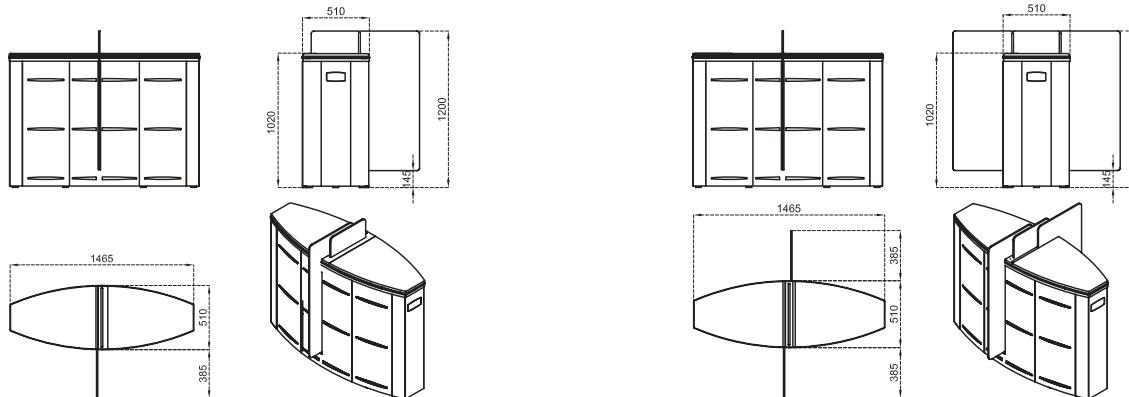


SG 90 T-S
Glass Wing Height: 2000 mm

SG 90 T-C
Glass Wing Height: 2000 mm

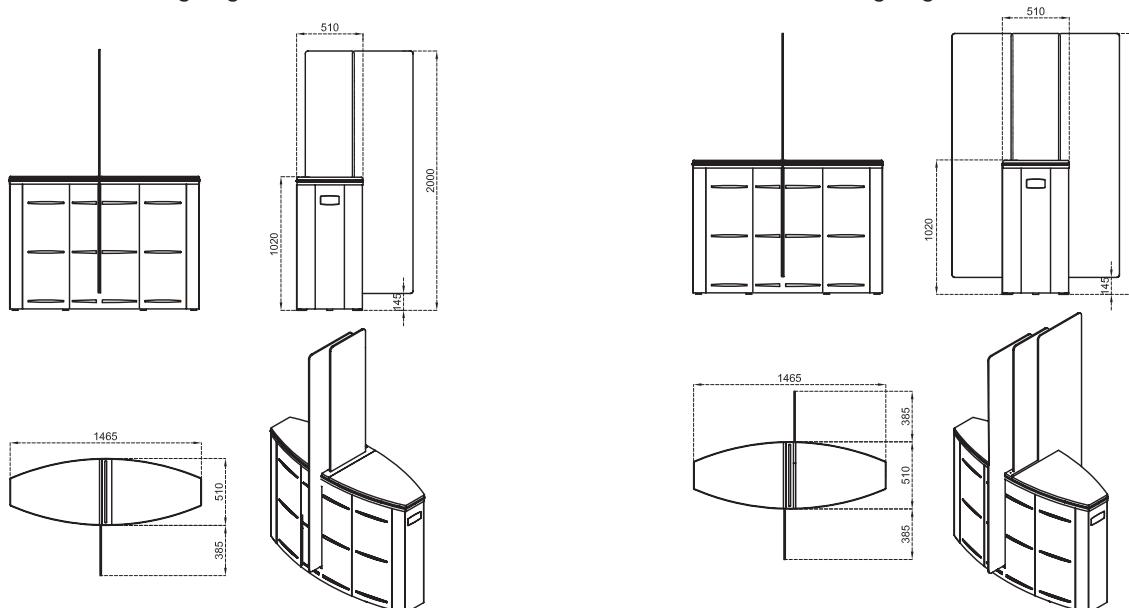

PG 03 55 PADDLE GATE




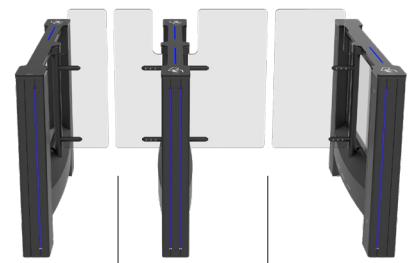


550 & 900 mm net passage width
combinations can be created.


Technical Features

Place of Use	Indoors.				
Operating Temperature, Humidity	-20°C/+68°C, RH 95% non-condensing.				
Operating Intensity	100%, 7/24 use.				
Material Specifications					
Body	304 grade (opt. 316 grade) satine brushed stainless steel, acrylic panel side walls.				
Top Lid	10 mm black tempered glass .				
Wings	10 mm tempered glass with 900 – 1200 – optionally 1500 mm wing height choices.				
Indicators	Direction and Passage Indicators : Vertical LED and sliding asteroid animated LED on top lid standard.				
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. ($\pm 10\%$), 24V DC.</p> <p>Consumption (single) : 8W at stand-by, max ~38W</p> <p>Consumption (center) : 16W at stand-by, max ~38+38W (varies according to the options and accessories used)</p>				
Operating Modes	<p>System operates bi-directionally (entry-exit).</p> <p>Operation modes can be changed through dip switch.</p> <table> <tr> <td>Entry - exit controlled</td> <td>Entry - exit free</td> </tr> <tr> <td>Entry controlled, exit free</td> <td>Exit controlled, entry free</td> </tr> </table>	Entry - exit controlled	Entry - exit free	Entry controlled, exit free	Exit controlled, entry free
Entry - exit controlled	Entry - exit free				
Entry controlled, exit free	Exit controlled, entry free				
Operating System	<p>Electromechanical motorised system with electronic torque and sensor controls that provides wing movement swinging to passage direction for rapid passages.</p> <p>A passage lane consists of min. 2 pieces of single units facing each other.</p> <p>Electromechanical motorized wings are closed at stand-by. Person requests authorisation from the access control device (3rd party device) connected to the gate's entry system. Upon authorisation, wings open, passage of the person is monitored by the multi-sensors along the passageway and wings close upon completion of the passage. In case of subsequent access authorisations, wings keep open until the last person completes his passage and then close.</p> <p>Wings do not move and do not harm the person in case the person is between the wings thanks to the sensors. In addition, electronic torque control system is continuously active during closing of the wings.</p> <p>Sensors along the passageway detects suitcase providing secure and comfortable passages.</p> <p>Systems generates audio/visual alarm in case of tailgating or illegal passage attempts.</p> <p>System message codes can be monitored from the internal diagnostic screen.</p>				
Control System	<p>All functions, parameters and operating modes can be changed through the control board (microprocessor controlled).</p> <p>All inputs are opto-coupler protected.</p> <p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available.</p>				
Flow Rate	<p>Wing opening / closing time : ~0,8-1,2 sec. (depending on the wing height)</p> <p>Free passage mode : ~50 pass/min. Nominal : ~25 pass/min. (passage rate can change depending on the access control system utilized)</p>				
Emergency Mode	Wings provide a free passageway by automatically opening to the preferred direction adjustable by dip-switch (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.				
Power-off Situation	Wings provide a free passageway pushed manually to either entry or exit direction (fail safe). Wings provide a free passageway by automatically opening to the preferred direction with the optional internal battery adjustable by dip-switch.				
Weight	Single : ~70 kg Center : ~85 kg				
Optional Features and Accessories	Wireless remote control (receiver-transmitter), manual control, card reader mounting bracket, motorized card collector unit and card collection box, battery back-up, internal battery, RS232-RS485-TCP/IP modules, different wing heights, 316 grade stainless steel, electrostatic powder coating on 304 grade stainless steel, bottom plate, stainless steel top lid.				

Dimensions (mm)

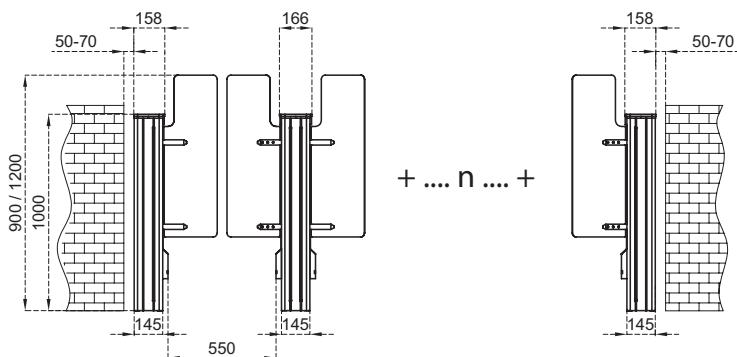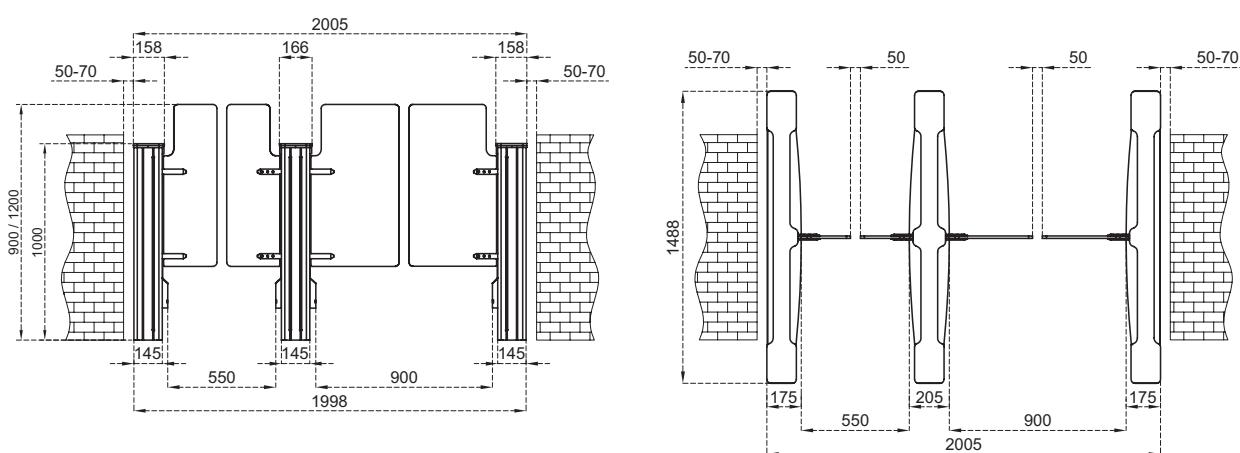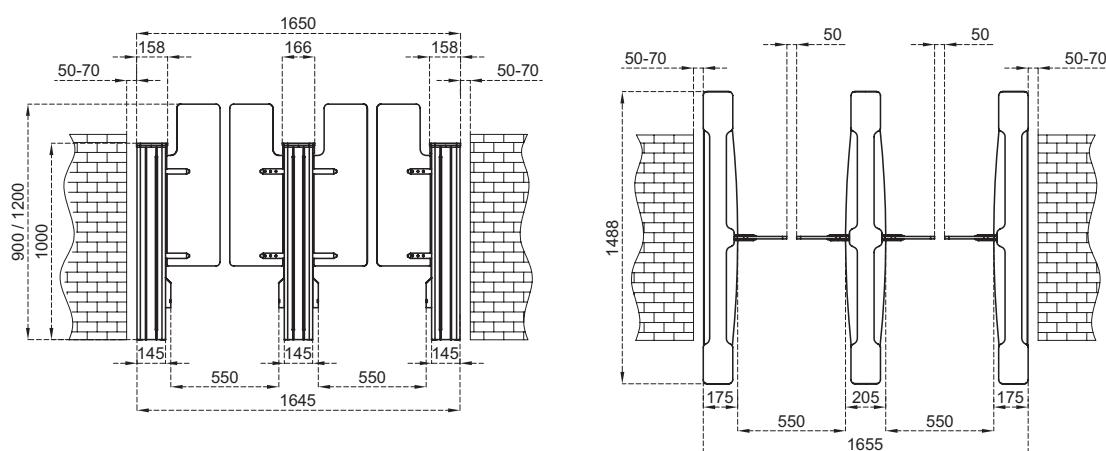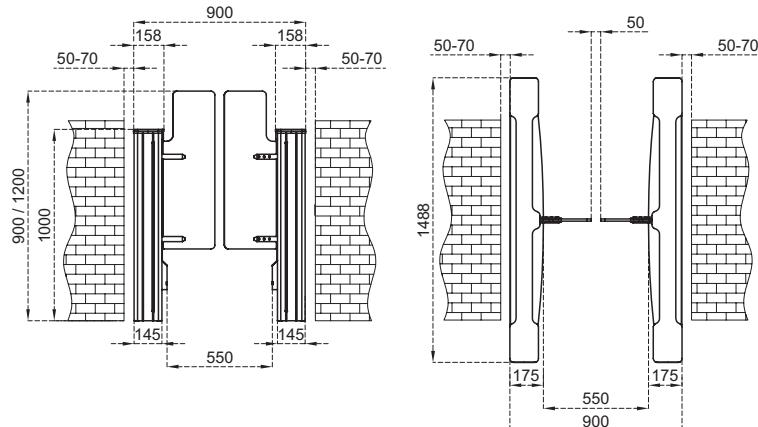





PG 03 90 PADDLE GATE

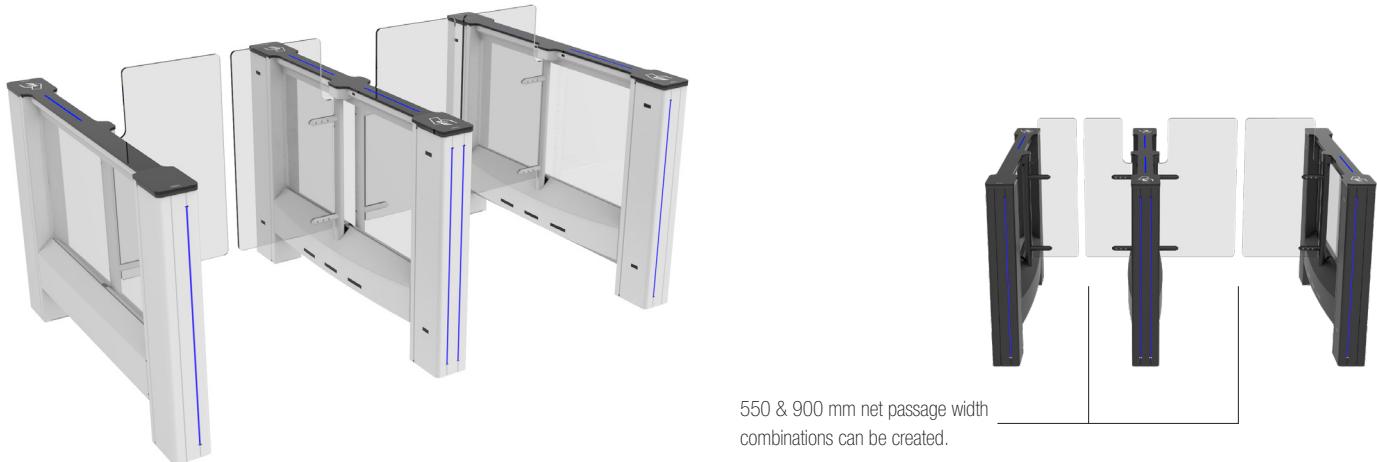

Technical Features

Place of Use	Indoors.						
Operating Temperature, Humidity	-20°C/+68°C, RH 95% non-condensing.						
Operating Intensity	100%, 7/24 use.						
Material Specifications	<table border="1"> <tr> <td>Body</td><td>304 grade (opt. 316 grade) satin brushed stainless steel, acrylic panel side walls.</td></tr> <tr> <td>Top Lid</td><td>10 mm black tempered glass .</td></tr> <tr> <td>Wings</td><td>10 mm tempered glass with 900 - 1200 - optionally 1500 mm wing height choices.</td></tr> </table>	Body	304 grade (opt. 316 grade) satin brushed stainless steel, acrylic panel side walls.	Top Lid	10 mm black tempered glass .	Wings	10 mm tempered glass with 900 - 1200 - optionally 1500 mm wing height choices.
Body	304 grade (opt. 316 grade) satin brushed stainless steel, acrylic panel side walls.						
Top Lid	10 mm black tempered glass .						
Wings	10 mm tempered glass with 900 - 1200 - optionally 1500 mm wing height choices.						
Indicators	Direction and Passage Indicators : Vertical LED and sliding asteroid animated LED on top lid standard.						
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC.</p> <p>Consumption (single) : 8W at stand-by, max ~38W</p> <p>Consumption (center) : 16W at stand-by, max ~38+38W</p> <p>(varies according to the options and accessories used)</p>						
Operating Modes	<p>System operates bi-directionally (entry-exit).</p> <p>Operation modes can be changed through dip switch.</p> <table> <tr> <td>Entry - exit controlled</td> <td>Entry - exit free</td> </tr> <tr> <td>Entry controlled, exit free</td> <td>Exit controlled, entry free</td> </tr> </table>	Entry - exit controlled	Entry - exit free	Entry controlled, exit free	Exit controlled, entry free		
Entry - exit controlled	Entry - exit free						
Entry controlled, exit free	Exit controlled, entry free						
Operating System	<p>Suitable for passage with wheelchairs, suitcases and trolleys with clear passage width up to 900 mm.</p> <p>Electromechanical motorised system with electronic torque and sensor controls that provides wing movement swinging to passage direction for rapid passages.</p> <p>A passage lane consists of min. 2 pieces of single units facing each other.</p> <p>Electromechanical motorized wings are closed at stand-by. Person requests authorisation from the access control device (3rd party device) connected to the gate's entry system. Upon authorisation, wings open, passage of the person is monitored by the multi-sensors along the passageway and wings close upon completion of the passage. In case of subsequent access authorisations, wings keep open until the last person completes his passage and then close.</p> <p>Wings do not move and do not harm the person in case the person is between the wings thanks to the sensors. In addition, electronic torque control system is continuously active during closing of the wings.</p> <p>Sensors along the passageway detects suitcase providing secure and comfortable passages.</p> <p>Systems generates audio/visual alarm in case of tailgating or illegal passage attempts.</p> <p>System message codes can be monitored from the internal diagnostic screen.</p>						
Control System	<p>All functions, parameters and operating modes can be changed through the control board (microprocessor controlled).</p> <p>All inputs are opto-coupler protected.</p> <p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available.</p>						
Flow Rate	<p>Wing opening / closing time : ~0,8-1,2 sec. (depending on the wing height)</p> <p>Free passage mode : ~50 pass/min. Nominal : ~25 pass/min.</p> <p>(passage rate can change depending on the access control system utilized)</p>						
Emergency Mode	Wings provide a free passageway by automatically opening to the preferred direction adjustable by dip-switch (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.						
Power-off Situation	Wings provide a free passageway pushed manually to either entry or exit direction (fail safe). Wings provide a free passageway by automatically opening to the preferred direction with the optional internal battery adjustable by dip-switch.						
Weight	<p>Single : ~70 kg</p> <p>Center : ~85 kg</p>						
Optional Features and Accessories	Wireless remote control (receiver-transmitter), manual control, card reader mounting bracket, motorized card collector unit and card collection box, battery back-up, internal battery, RS232-RS485-TCP/IP modules, different wing heights, 316 grade stainless steel, electrostatic powder coating on 304 grade stainless steel, bottom plate, stainless steel top lid.						

Dimensions (mm)

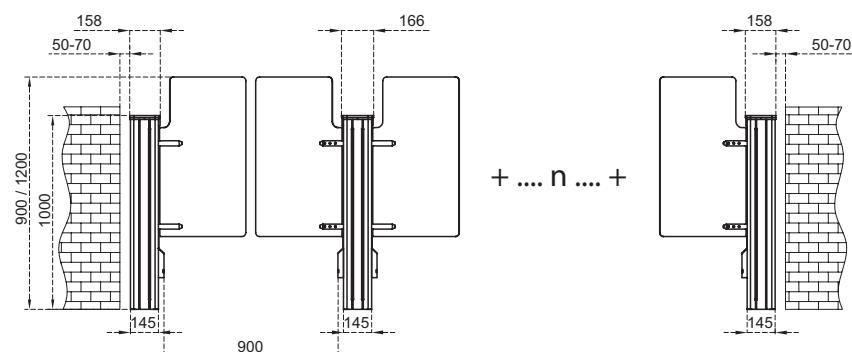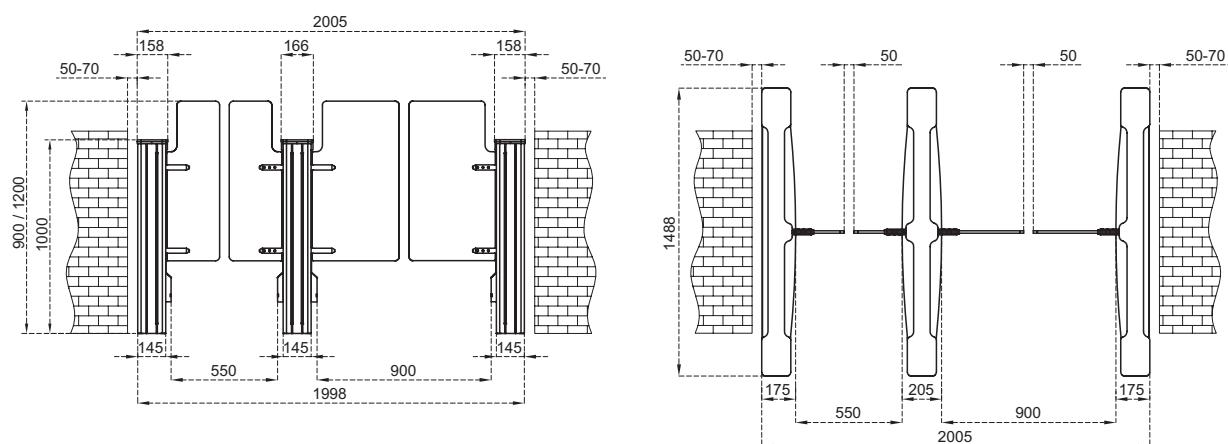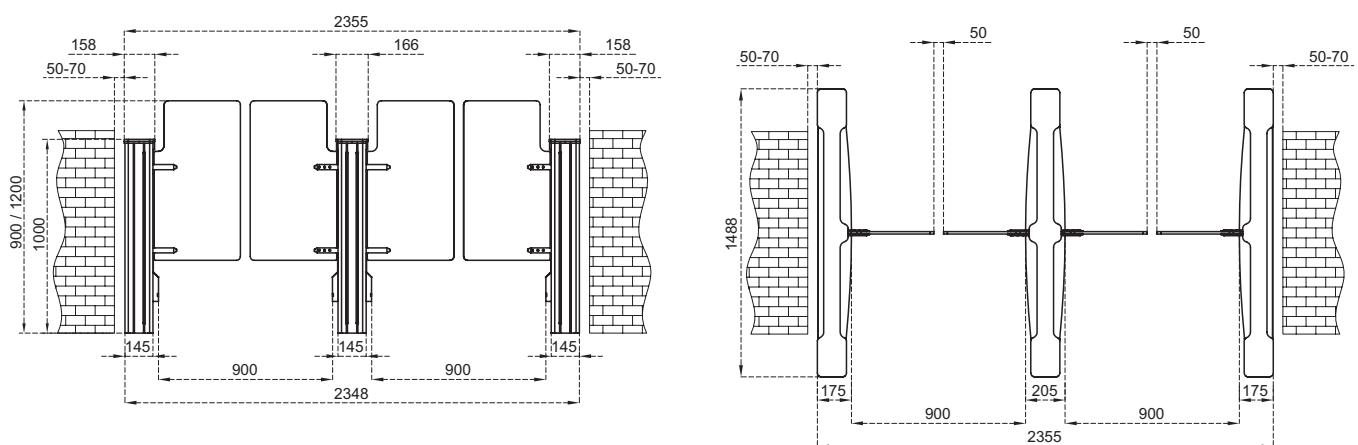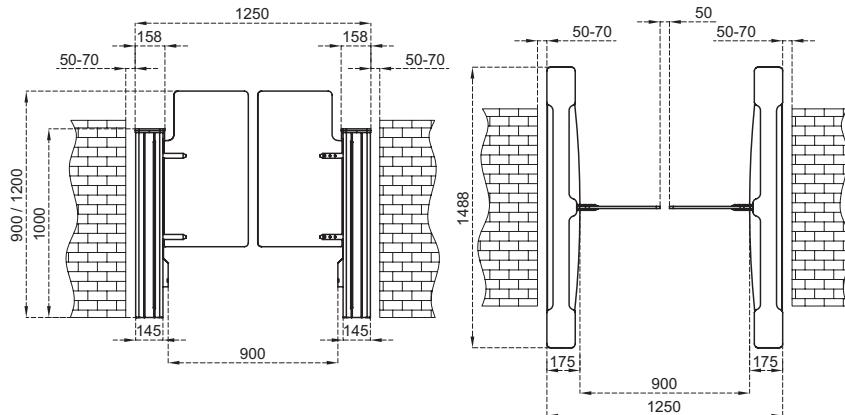

+ n +




GLASS LINE

64	GL A1
65	GL B1
67	GL A2
68	SALOON

CAME TÖZAK




Dimensions (mm)

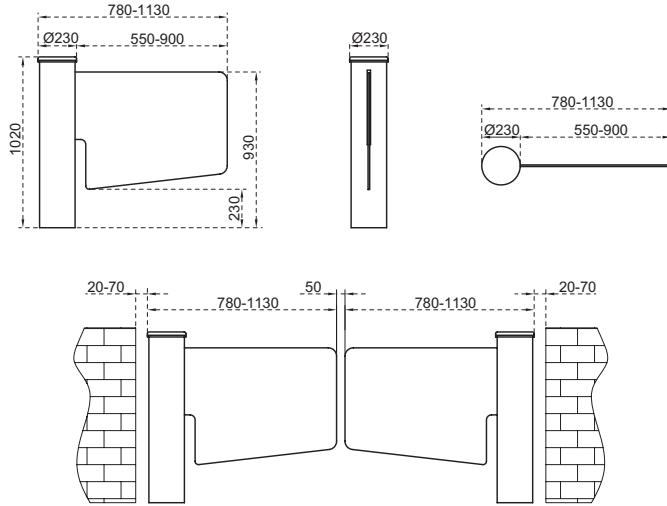

Technical Features



Dimensions (mm)

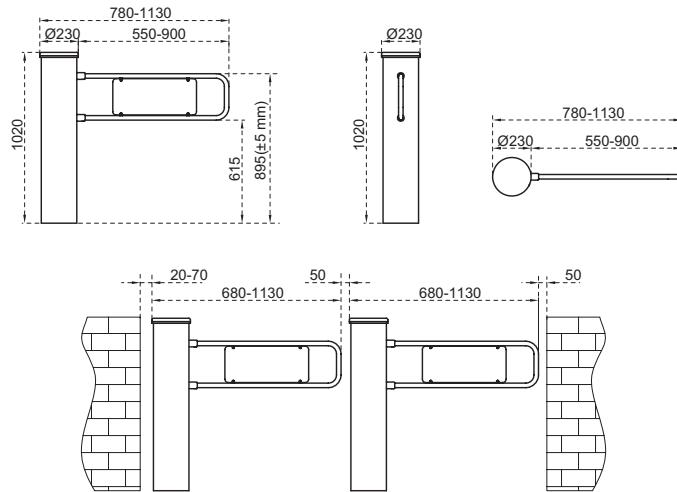


Technical Features





Dimensions (mm)

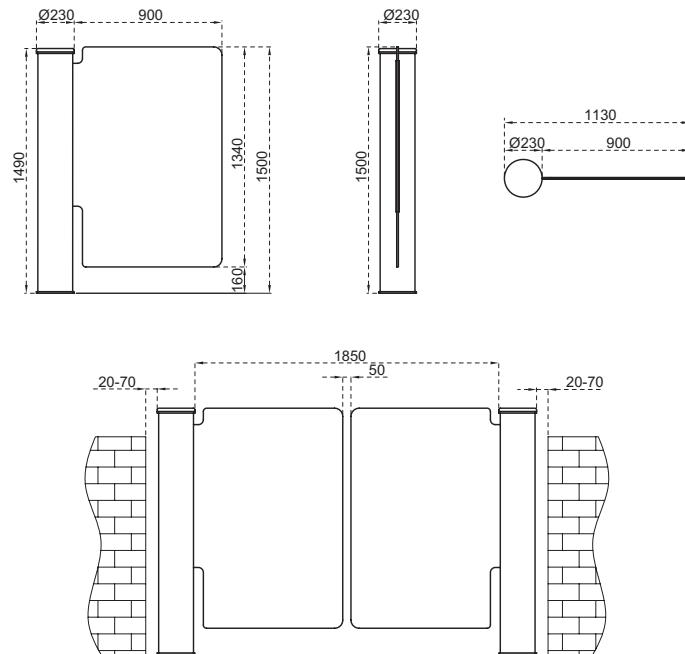

Technical Features

SALOON




Chrome, matt black
or other optional
colors are available.








Technical Features

Dimensions (mm)

875 mm Wing Width

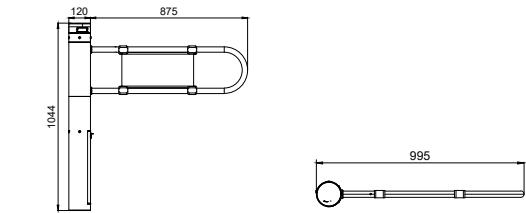

1200 mm Wing Width

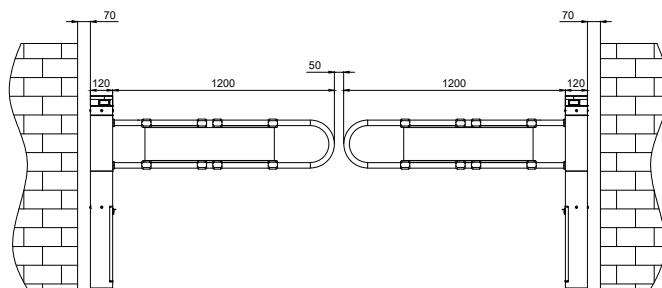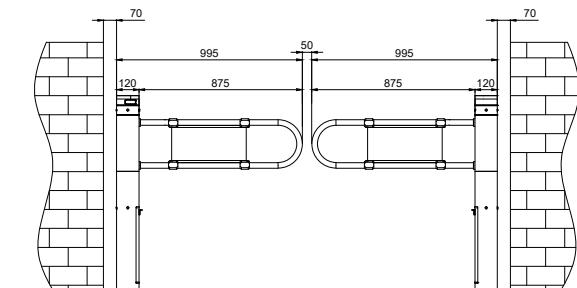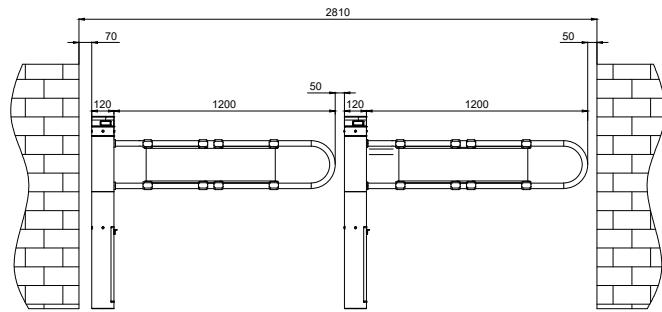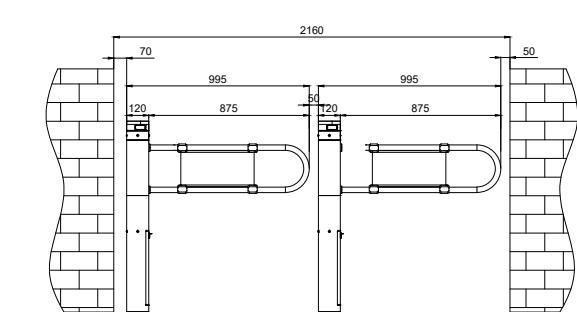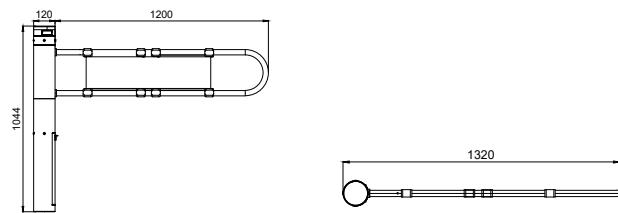

LERDEN GEÇİREMEDİĞİNİZ
ve PAKETLERİNİZ İÇİN
460 16 70 İ ARAYINIZ

GARAJ İLE İLGİLİ
SORUNLARINIZ İÇİN
0212 460 11 08
ARAYINIZ.

DARİÜSLER




HALF HEIGHT TURNSTILES



72 HT 400
73 HT 400 D

CAME  **ÖZAK**

HT 400

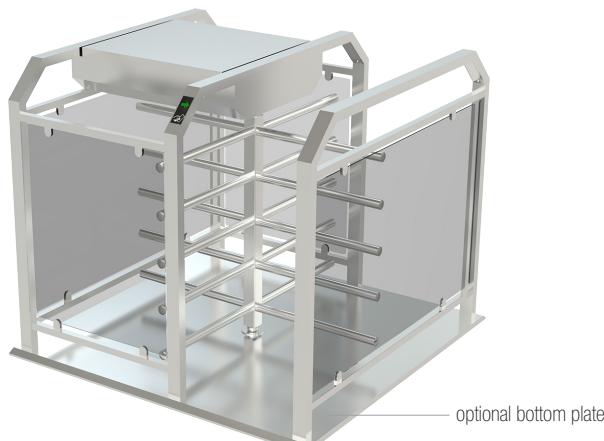


Dimensions (mm)


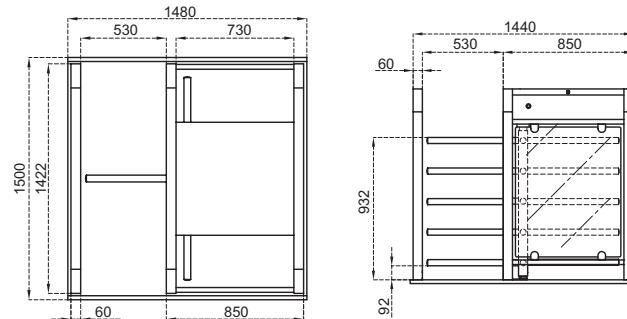


Technical Features

Place of Use	Indoors, outdoors					
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.					
Operating Intensity	100%, 7/24 use.					
Built on box beam main carriers and contains waterproof protecting top lid. Four-section rotor (90°), each having 5 one by one demountable arms.						
Combination options with different material choices:						
Body / Arm Features	HT 400	HT 400-25	HT 400-100			
	Body Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade)* stainless steel			
	Arms Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.			
	(* Finishing : Satine brushed (opt. electrostatic powder coating on stainless steel)).					
Indicators	Status - Direction Indicators :   DOT MATRIX LED, standard. Passage Indicators :  LED standard.					
Power	Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC. Consumption : ~14W at stand-by, max ~50W (varies according to the options and accessories used).					
Operating Modes	System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card. Entry - exit controlled Entry controlled, exit free Entry free, exit controlled Single input both directions use Entry - exit free					
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).					
Control System	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.					
Flow Rate	Passage capacity (manual) : max. 50 cycle/min. Nominal : ~25 pass/min. Passage capacity (motorized) : max. 34 cycle/min. Nominal : ~18 pass/min. (nominal passage rate can change depending on the access control system utilized)					
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.					
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.					
Weight	~150 kg					
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, different color choices.					


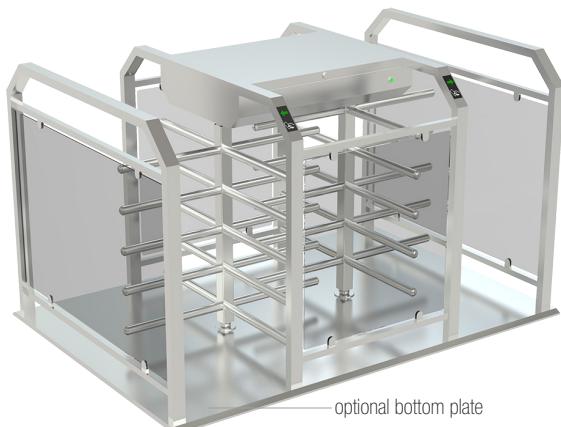


Dimensions (mm)

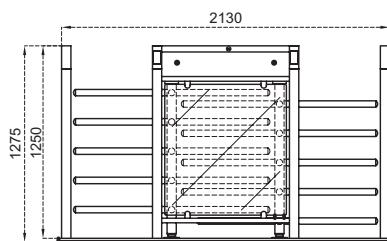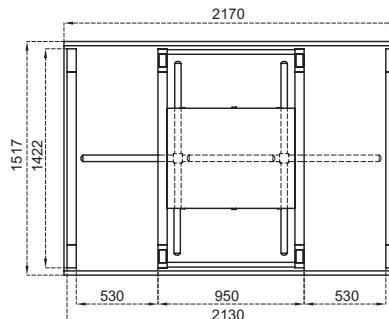

Technical Features

Place of Use	Indoors, outdoors		
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.		
Operating Intensity	100%, 7/24 use.		
	Built on box beam main carriers and contains waterproof protecting top lid. Four-section rotor (90°), each having 5 one by one demountable arms.		
Combination options with different material choices:			
Body / Arm Features	HT 400 D	HT 400 D-25	HT 400 D-100
	Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel
	Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.
(*) Finishing : Satine brushed (opt. electrostatic powder coating on stainless steel).			
Indicators	Status - Direction Indicators : DOT MATRIX LED, standard. Passage Indicators : LED standard.		
Power	Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC. Consumption : ~28W at stand-by, max ~50+50W (varies according to the options and accessories used).		
Operating Modes	System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card. Entry - exit controlled Entry controlled, exit free Entry free, exit controlled Single input both directions use Entry - exit free		
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).		
Control System	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.		
Flow Rate	Passage capacity (manual) : max. 100 cycle/min. Nominal : ~50 pass/min. Passage capacity (motorized) : max. 68 cycle/min. Nominal : ~36 pass/min. (nominal passage rate can change depending on the access control system utilized)		
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.		
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.		
Weight	~250 kg		
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, different color choices.		



FULL HEIGHT TURNSTILES

78	BT 312
79	BT 312 D
80	BTX 300 N1
81	BTX 300 N1 D
84	BT ROOF 300
85	BT ROOF 300 D
86	BTC 300
87	BTC 300 D
88	BTG 300
89	BTG 300 D
92	BT 402
93	BT 402 D
94	BTX 400 N1
95	BTX 400 N1 D
98	BTC 400
99	BTC 400 D
100	BTG 400
101	BTG 400 D





B2




B2

403 404





Dimensions (mm)

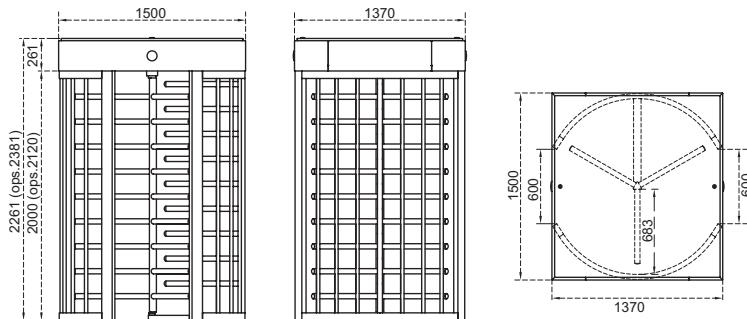


Technical Features

Place of Use	Indoors, outdoors														
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.														
Operating Intensity	100%, 7/24 use.														
Body / Arm Features	<p>Built on main carriers and supported with pipe beams on sides, consisting of waterproof and protecting top lid, mechanical compartment side panels and completely closed ceiling. Can be completely disassembled.</p> <p>Three-section rotor (120°), each having 9 (10 in optional 2120 mm clear passage height) one by one demountable arms.</p> <p>Optionally complies with UK H&S regulation of ≤98 mm gap between upright profiles.</p> <p>Combination options with different material choices:</p> <table border="1"> <thead> <tr> <th></th> <th>BT 312</th> <th>BT 312-25</th> <th>BT 312-100</th> </tr> </thead> <tbody> <tr> <td>Body</td> <td>Electrostatic powder coating on hot-dip galvanized steel</td> <td>Electrostatic powder coating on hot-dip galvanized steel</td> <td>304 grade (opt. 316 grade) stainless steel</td> </tr> <tr> <td>Arms</td> <td>Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.</td> <td>304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.</td> <td>304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.</td> </tr> </tbody> </table> <p>(*) Finishing : Satine brushed (opt. electrostatic powder coating on stainless steel).</p>				BT 312	BT 312-25	BT 312-100	Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel	Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.
	BT 312	BT 312-25	BT 312-100												
Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel												
Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.												
Indicators / Illumination	Status - Direction Indicators : LED, standard/LED passageway illumination standard.														
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC.</p> <p>Consumption : ~8,1W at stand-by, during passage ~7,6W (varies according to the options and accessories used).</p>														
Operating Modes	<p>System operates bi-directionally (entry-exit).</p> <p>Operating modes can be adjusted through the buttons and screen on the control card.</p> <table> <tr> <td>Entry - exit controlled</td> <td>Entry controlled, exit free</td> <td>Entry free, exit controlled</td> </tr> <tr> <td>Single input both directions use</td> <td>Entry - exit free</td> <td></td> </tr> </table>			Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled	Single input both directions use	Entry - exit free							
Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled													
Single input both directions use	Entry - exit free														
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).														
Control System	<p>All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card.</p> <p>All inputs are opto-coupler protected.</p> <p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available</p>														
Flow Rate	<p>Passage capacity (manual) : max. 48 cycle/min. Nominal : ~25 pass/min.</p> <p>Passage capacity (motorized) : max. 40 cycle/min. Nominal : ~20 pass/min.</p> <p>(nominal passage rate can change depending on the access control system utilized)</p>														
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.														
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.														
Weight	~275 kg														
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, 2120 mm clear passage height, mechanics compartment accessibility from the ceiling, trombone arms, different color choices, compliance with UK H&S regulation of ≤98 mm gap between upright profiles.														



Dimensions (mm)

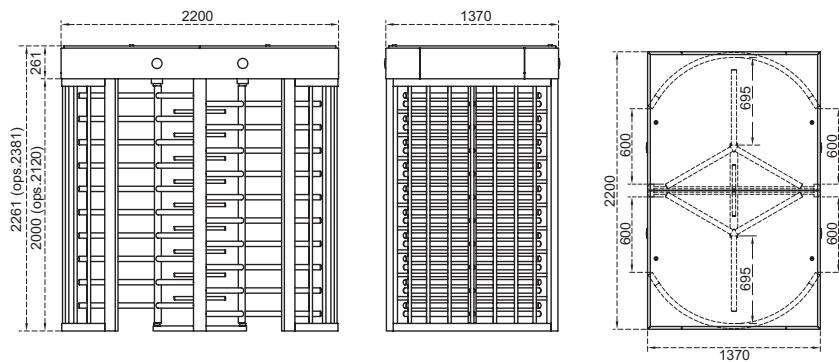


Technical Features

Place of Use	Indoors, outdoors												
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.												
Operating Intensity	100%, 7/24 use.												
Built on main carriers and supported with pipe beams on sides, consisting of waterproof and protecting top lid, mechanical compartment side panels and completely closed ceiling. Can be completely disassembled.													
A pair of three-section rotors (120°), each having 10+10 (11+11 in optional 2120 mm clear passage height) one by one demountable arms.													
Optionally complies with UK H&S regulation of ≤98 mm gap between upright profiles.													
Combination options with different material choices:													
<table border="1"> <thead> <tr> <th></th> <th>BT 312 D</th> <th>BT 312 D-25</th> <th>BT 312 D-100</th> </tr> </thead> <tbody> <tr> <td>Body</td> <td>Electrostatic powder coating on hot-dip galvanized steel</td> <td>Electrostatic powder coating on hot-dip galvanized steel</td> <td>304 grade (opt. 316 grade) stainless steel</td> </tr> <tr> <td>Arms</td> <td>Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.</td> <td>304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.</td> <td>304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.</td> </tr> </tbody> </table>			BT 312 D	BT 312 D-25	BT 312 D-100	Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel	Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.
	BT 312 D	BT 312 D-25	BT 312 D-100										
Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel										
Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.										


(*) Finishing : Satine brushed (opt. electrostatic powder coating on stainless steel).

Indicators / Illumination	Status - Direction Indicators : LED, standard/LED passageway illumination standard.
Power	Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC. Consumption : ~16,2W at stand-by, during passage ~7,6+7,6W (varies according to the options and accessories used).
Operating Modes	System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card. Entry - exit controlled Entry controlled, exit free Entry free, exit controlled Single input both directions use Entry - exit free
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).
Control System	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.
Flow Rate	Passage capacity (manual) : max. 96 cycle/min. Nominal : ~50 pass/min. Passage capacity (motorized) : max. 80 cycle/min. Nominal : ~40 pass/min. (nominal passage rate can change depending on the access control system utilized)
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.
Weight	~530 kg
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, 2120 mm clear passage height, mechanics compartment accessibility from the ceiling, different color choices, compliance with UK H&S regulation of ≤98 mm gap between upright profiles.

BTX 300 N1

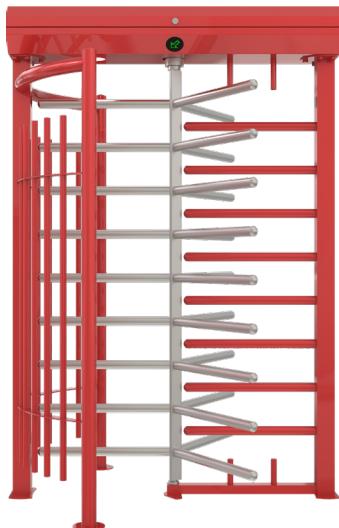

Dimensions (mm)

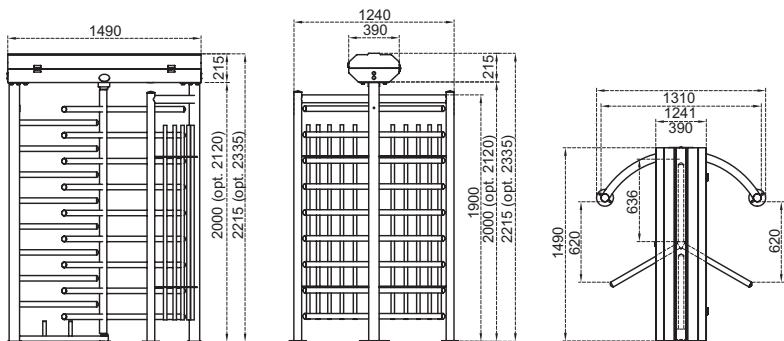

Technical Features




Place of Use	Indoors, outdoors												
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.												
Operating Intensity	100%, 7/24 use.												
Built on main carriers and supported with pipe beams on sides, consisting of waterproof and protected top lid with damper for safety. Can be completely disassembled.													
Three-section rotor (120°), each having 9 (10 in optional 2120 mm clear passage height) one by one demountable arms. Complies with UK H&S regulation of ≤98 mm gap between upright profiles.													
Combination options with different material choices:													
Body / Arm Features	<table border="1"> <thead> <tr> <th></th><th>BTX 300 N1</th><th>BTX 300 N1-25</th><th>BTX 300 N1-100</th></tr> </thead> <tbody> <tr> <td>Body</td><td>Electrostatic powder coating on hot-dip galvanized steel</td><td>Electrostatic powder coating on hot-dip galvanized steel</td><td>304 grade (opt. 316 grade) stainless steel</td></tr> <tr> <td>Arms</td><td>Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.</td><td>304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.</td><td>304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.</td></tr> </tbody> </table>		BTX 300 N1	BTX 300 N1-25	BTX 300 N1-100	Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel	Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.
	BTX 300 N1	BTX 300 N1-25	BTX 300 N1-100										
Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel										
Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.										

(*) Finishing : Satin brushed (opt. electrostatic powder coating on stainless steel).

Indicators / Illumination	Status - Direction Indicators : LED, standard/LED passageway illumination standard.		
Power	Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC. Consumption : ~8,1W at stand-by, during passage ~7,6W (varies according to the options and accessories used).		
System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card.			
Operating Modes	Entry - exit controlled Single input both directions use	Entry controlled, exit free Entry - exit free	Entry free, exit controlled
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).		
Control System	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.		
Flow Rate	Passage capacity (manual) : max. 48 cycle/min. Nominal : ~25 pass/min. Passage capacity (motorized) : max. 40 cycle/min. Nominal : ~20 pass/min. (nominal passage rate can change depending on the access control system utilized)		
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.		
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.		
Weight	~190 kg		
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, 2120 mm clear passage height, mechanics compartment accessibility from the ceiling, trombone arms, different color choices.		



Dimensions (mm)

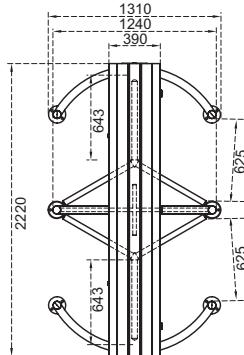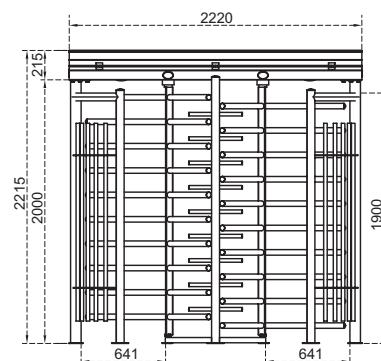

Technical Features

Place of Use	Indoors, outdoors
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.
Operating Intensity	100%, 7/24 use.
Built on main carriers and supported with pipe beams on sides, consisting of waterproof and protected top lid with damper for safety. Can be completely disassembled.	
A pair of three-section rotors (120°), each having 10+10 (11+11 in optional 2120 mm clear passage height) one by one demountable arms.	
Complies with UK H&S regulation of ≤98 mm gap between upright profiles.	
Combination options with different material choices:	
Body / Arm Features	BTX 300 N1 D
	BTX 300 N1 D-25
	BTX 300 N1 D-100
Body	Electrostatic powder coating on hot-dip galvanized steel
	Electrostatic powder coating on hot-dip galvanized steel
Arms	304 grade (opt. 316 grade)* stainless steel, Ø42x2,5 mm.
	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.

(*) Finishing : Satin brushed (opt. electrostatic powder coating on stainless steel).

Indicators / Illumination	Status - Direction Indicators :   LED, standard/LED passageway illumination standard.
Power	Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC. Consumption : ~16,2W at stand-by, during passage ~7,6+7,6W (varies according to the options and accessories used).
System operates bi-directionally (entry-exit).	
Operating Modes	Operating modes can be adjusted through the buttons and screen on the control card. Entry - exit controlled Entry controlled, exit free Entry free, exit controlled Single input both directions use Entry - exit free
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).
All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected.	
Control System	Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.
Flow Rate	Passage capacity (manual) : max. 96 cycle/min. Nominal : ~50 pass/min. Passage capacity (motorized) : max. 80 cycle/min. Nominal : ~40 pass/min. (nominal passage rate can change depending on the access control system utilized)
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.
Weight	~365 kg
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, 2120 mm clear passage height, mechanics compartment accessibility from the ceiling, different color choices.






*2011 PE

BT ROOF 300



Dimensions (mm)

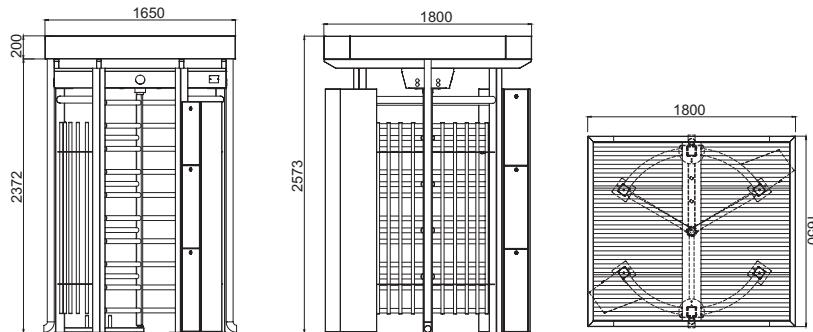

Technical Features

Place of Use	Indoors, outdoors
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.
Operating Intensity	100%, 7/24 use.
Body / Arm Features	<p>Built on main carriers and supported with box type beams on sides.</p> <p>There are columns with 3 sections designed for installation of electronic system, card reader and access control systems in both entry and exit directions.</p> <p>Roof covered with corrugated (galvanized painted) steel.</p> <p>Mechanics compartment accessibility from the ceiling.</p> <p>Rain gutters (304 grade stainless steel)</p> <p>Three-section rotor (120°), each having 10 one by one demountable arms.</p> <p>Complies with UK H&S regulation of ≤98 mm gap between upright profiles.</p>

Combination options with different material choices:


	BT ROOF 300	BT ROOF 300 -25	BT ROOF 300-100
Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel
Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.

(* Finishing : Satin brushed (opt. electrostatic powder coating on stainless steel)).

Indicators / Illumination	Status - Direction Indicators : LED, standard/LED passageway illumination standard.								
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC.</p> <p>Consumption : ~8,1W at stand-by, during passage ~7,6W (varies according to the options and accessories used).</p>								
Operating Modes	<p>System operates bi-directionally (entry-exit).</p> <p>Operating modes can be adjusted through the buttons and screen on the control card.</p> <table> <tr> <td>Entry - exit controlled</td> <td>Entry controlled, exit free</td> <td>Entry free, exit controlled</td> </tr> <tr> <td>Single input both directions use</td> <td>Entry - exit free</td> <td></td> </tr> </table>			Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled	Single input both directions use	Entry - exit free	
Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled							
Single input both directions use	Entry - exit free								
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).								
Control System	<p>All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card.</p> <p>All inputs are opto-coupler protected.</p> <p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available.</p>								
Flow Rate	<p>Passage capacity (manual) : max. 48 cycle/min. Nominal : ~25 pass/min.</p> <p>Passage capacity (motorized) : max. 40 cycle/min. Nominal : ~20 pass/min.</p> <p>(nominal passage rate can change depending on the access control system utilized)</p>								
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.								
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.								
Weight	~300 kg								
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, trombone arms, different color choices.								




Dimensions (mm)

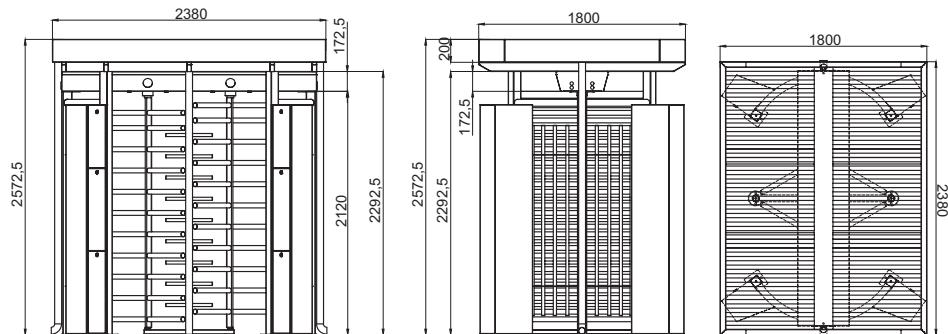


Technical Features

Place of Use	Indoors, outdoors		
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.		
Operating Intensity	100%, 7/24 use.		
Body / Arm Features	<p>Built on main carriers and supported with box type beams on sides. There are columns with 3 sections designed for installation of electronic system, card reader and access control systems in both entry and exit directions. Roof covered with corrugated (galvanized painted) steel. Mechanics compartment accessibility from the ceiling. Rain gutters (304 grade stainless steel) Three-section rotor (120°), each having 11+11 one by one demountable arms. Complies with UK H&S regulation of ≤98 mm gap between upright profiles.</p>		
Indicators / Illumination	<p>Status - Direction Indicators : LED, standard/LED passageway illumination standard.</p>		
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC. Consumption : ~16,2W at stand-by, during passage ~7,6+7,6W (varies according to the options and accessories used).</p>		
Operating Modes	<p>System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card. Entry - exit controlled Entry controlled, exit free Entry free, exit controlled Single input both directions use Entry - exit free</p>		
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).		
Control System	<p>All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.</p>		
Flow Rate	<p>Passage capacity (manual) : max. 96 cycle/min. Nominal : ~50 pass/min. Passage capacity (motorized) : max. 80 cycle/min. Nominal : ~40 pass/min. (nominal passage rate can change depending on the access control system utilized)</p>		
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.		
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.		
Weight	~690 kg		
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, different color choices.		

BTC 300

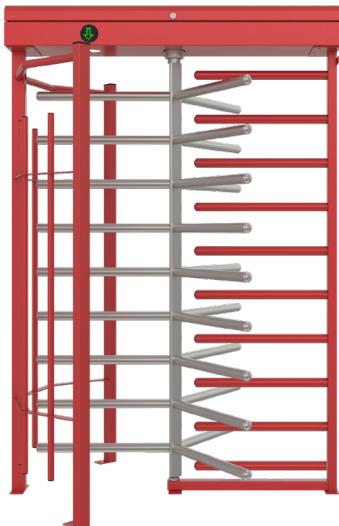

Dimensions (mm)

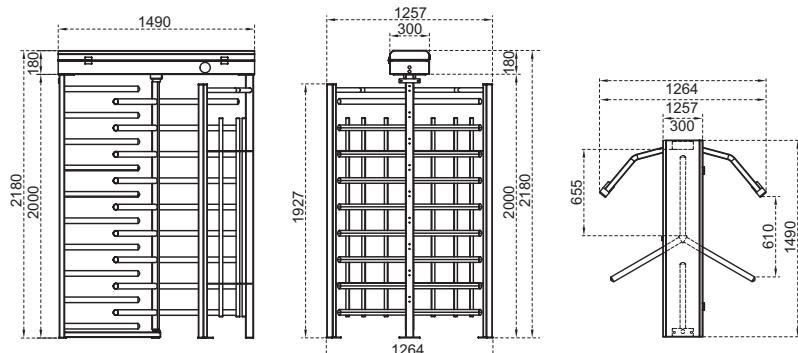


Technical Features

Place of Use	Indoors, outdoors														
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.														
Operating Intensity	100%, 7/24 use.														
Body / Arm Features	<table border="1"> <thead> <tr> <th></th><th>BTC 300</th><th>BTC 300-25</th><th>BTC 300-100</th></tr> </thead> <tbody> <tr> <td>Body</td><td>Electrostatic powder coating on hot-dip galvanized steel</td><td>Electrostatic powder coating on hot-dip galvanized steel</td><td>304 grade (opt. 316 grade) stainless steel</td></tr> <tr> <td>Arms</td><td>Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.</td><td>304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.</td><td>304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.</td></tr> </tbody> </table>				BTC 300	BTC 300-25	BTC 300-100	Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel	Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.
	BTC 300	BTC 300-25	BTC 300-100												
Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel												
Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.												
(*) Finishing : Satin brushed (opt. electrostatic powder coating on stainless steel).															
Indicators / Illumination	Status - Direction Indicators : LED, standard/LED passageway illumination standard.														
Power	Operating Voltage : 110/220V AC 50/60 Hz. (%±10), 24V DC. Consumption : ~8,1W at stand-by, during passage ~7,6W (varies according to the options and accessories used).														
Operating Modes	System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card. Entry - exit controlled Entry controlled, exit free Entry free, exit controlled Single input both directions use Entry - exit free														
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).														
Control System	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.														
Flow Rate	Passage capacity (manual) : max. 48 cycle/min. Nominal : ~25 pass/min. Passage capacity (motorized) : max. 40 cycle/min. Nominal : ~20 pass/min. (nominal passage rate can change depending on the access control system utilized)														
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.														
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.														
Weight	~175 kg														
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, 2120 mm clear passage height, trombone arms, different color choices, compliance with UK H&S regulation of ≤98 mm gap between upright profiles.														

*Design and specifications are subject to change without notice.



Dimensions (mm)

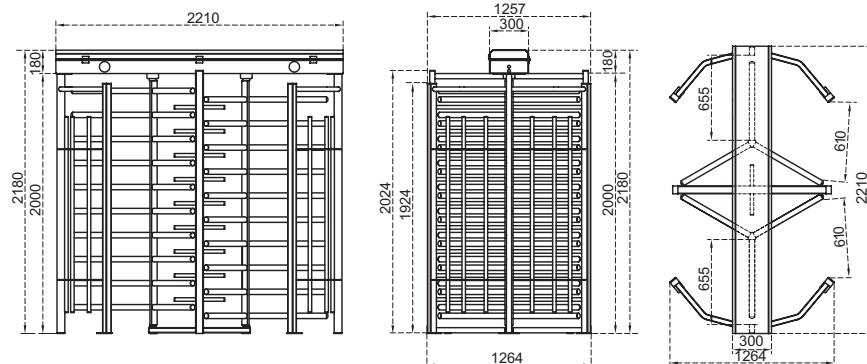


Technical Features

Place of Use	Indoors, outdoors												
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.												
Operating Intensity	100%, 7/24 use.												
<p>Built on main carriers and supported with pipe beams on sides, consisting of waterproof and protected top lid with damper for safety. Can be completely disassembled.</p> <p>A pair of three-section rotors (120°), each having 10+10 (11+11 in optional 2120 mm clear passage height) one by one demountable arms.</p> <p> Optionally complies with UK H&S regulation of ≤98 mm gap between upright profiles.</p>													
<p>Combination options with different material choices:</p> <table border="1"> <thead> <tr> <th></th> <th>BTC 300 D</th> <th>BTC 300 D-25</th> <th>BTC 300 D-100</th> </tr> </thead> <tbody> <tr> <td>Body</td> <td>Electrostatic powder coating on hot-dip galvanized steel</td> <td>Electrostatic powder coating on hot-dip galvanized steel</td> <td>304 grade (opt. 316 grade) stainless steel</td> </tr> <tr> <td>Arms</td> <td>Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.</td> <td>304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.</td> <td>304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.</td> </tr> </tbody> </table>			BTC 300 D	BTC 300 D-25	BTC 300 D-100	Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel	Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.
	BTC 300 D	BTC 300 D-25	BTC 300 D-100										
Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel										
Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.										


(*) Finishing : Satine brushed (opt. electrostatic powder coating on stainless steel).

Indicators / Illumination	Status - Direction Indicators : LED, standard/LED passageway illumination standard.							
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (%±10), 24V DC.</p> <p>Consumption : ~16,2W at stand-by, during passage ~7,6+7,6W (varies according to the options and accessories used).</p>							
<p>System operates bi-directionally (entry-exit).</p> <p>Operating modes can be adjusted through the buttons and screen on the control card.</p>								
Operating Modes	<table> <tr> <td>Entry - exit controlled</td> <td>Entry controlled, exit free</td> <td>Entry free, exit controlled</td> </tr> <tr> <td>Single input both directions use</td> <td>Entry - exit free</td> <td></td> </tr> </table>		Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled	Single input both directions use	Entry - exit free	
Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled						
Single input both directions use	Entry - exit free							
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).							
<p>All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card.</p> <p>All inputs are opto-coupler protected.</p>								
Control System	<p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available.</p>							
Flow Rate	<p>Passage capacity (manual) : max. 96 cycle/min. Nominal : ~50 pass/min.</p> <p>Passage capacity (motorized) : max. 80 cycle/min. Nominal : ~40 pass/min.</p> <p>(nominal passage rate can change depending on the access control system utilized)</p>							
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.							
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.							
Weight	~335 kg							
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, 2120 mm clear passage height, different color choices, compliance with UK H&S regulation of ≤98 mm gap between upright profiles.							

BTG 300

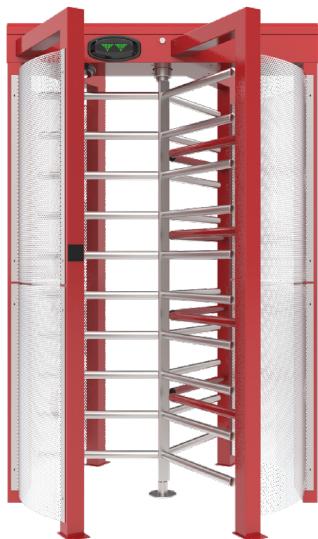


Dimensions (mm)

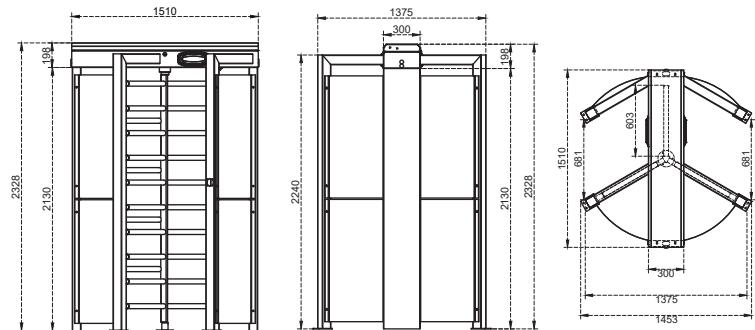


Place of Use	Indoors, outdoors								
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.								
Operating Intensity	100%, 7/24 use.								
<p>Built on main carriers and supported with profiles on sides and perforated sheet separators, consisting of waterproof and protected top lid with damper for safety. Can be completely disassembled.</p> <p>Three-section rotor (120°), each having 10 one by one demountable arms.</p>									
Combination options with different material choices:									
Body / Arm Features	BTG 300	BTG 300 - 25	BTG 300 -100						
	Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel						
	Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade stainless steel, Ø40x2,0 mm.						
	Perforated Sheet Separators	304 grade stainless steel	304 grade stainless steel						
Indicators / Illumination	Status - Direction Indicators :  LED, standard/LED passageway illumination standard.								
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC.</p> <p>Consumption : ~8,1W at stand-by, during passage ~7,6W (varies according to the options and accessories used).</p>								
System operates bi-directionally (entry-exit).									
Operating Modes	<p>Operating modes can be adjusted through the buttons and screen on the control card.</p> <table> <tr> <td>Entry - exit controlled</td> <td>Entry controlled, exit free</td> <td>Entry free, exit controlled</td> </tr> <tr> <td>Single input both directions use</td> <td>Entry - exit free</td> <td></td> </tr> </table>			Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled	Single input both directions use	Entry - exit free	
Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled							
Single input both directions use	Entry - exit free								
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).								
All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card.									
All inputs are opto-coupler protected.									
Control System	<p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available.</p>								
<p>Passage capacity (manual) : max. 48 cycle/min. Nominal : ~25 pass/min.</p> <p>Passage capacity (motorized) : max. 40 cycle/min. Nominal : ~20 pass/min.</p> <p>(nominal passage rate can change depending on the access control system utilized)</p>									
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.								
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.								
Weight	~275 kg								
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, bottom plate (standard or for forklift handling), battery back-up, RS232-RS485-TCP/IP modules, limiter, different color choices.								



Dimensions (mm)

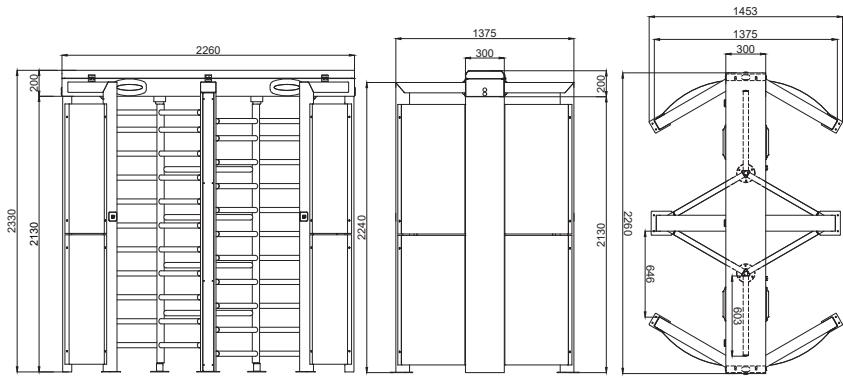

Place of Use	Indoors, outdoors			
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.			
Operating Intensity	100%, 7/24 use.			
	Built on main carriers and supported with profiles on sides and perforated sheet separators, consisting of waterproof and protected top lid with damper for safety. Can be completely disassembled. A pair of three-section rotors (120°), each having 11+11 one by one demountable arms.			
	Combination options with different material choices:			
Body / Arm Features	BTG 300 D	BTG 300 D - 25	BTG 300 D -100	
	Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade stainless steel
	Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade stainless steel, Ø40x2,0 mm.	304 grade stainless steel, Ø40x2,0 mm.
	Perforated Sheet Separators	304 grade stainless steel	304 grade stainless steel	304 grade stainless steel
Indicators / Illumination	Status - Direction Indicators :  LED, standard/LED passageway illumination standard.			
Power	Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC. Consumption : ~16,2W at stand-by, during passage ~7,6+7,6W (varies according to the options and accessories used).			
	System operates bi-directionally (entry-exit).			
Operating Modes	Operating modes can be adjusted through the buttons and screen on the control card. Entry - exit controlled Entry controlled, exit free Entry free, exit controlled Single input both directions use Entry - exit free			
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).			
Control System	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.			
Flow Rate	Passage capacity (manual) : max. 96 cycle/min. Nominal : ~50 pass/min. Passage capacity (motorized) : max. 80 cycle/min. Nominal : ~40 pass/min. (nominal passage rate can change depending on the access control system utilized)			
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.			
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.			
Weight	~375 kg			
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, bottom plate (standard or for forklift handling), battery back-up, RS232-RS485-TCP/IP modules, limiter, different color choices.			

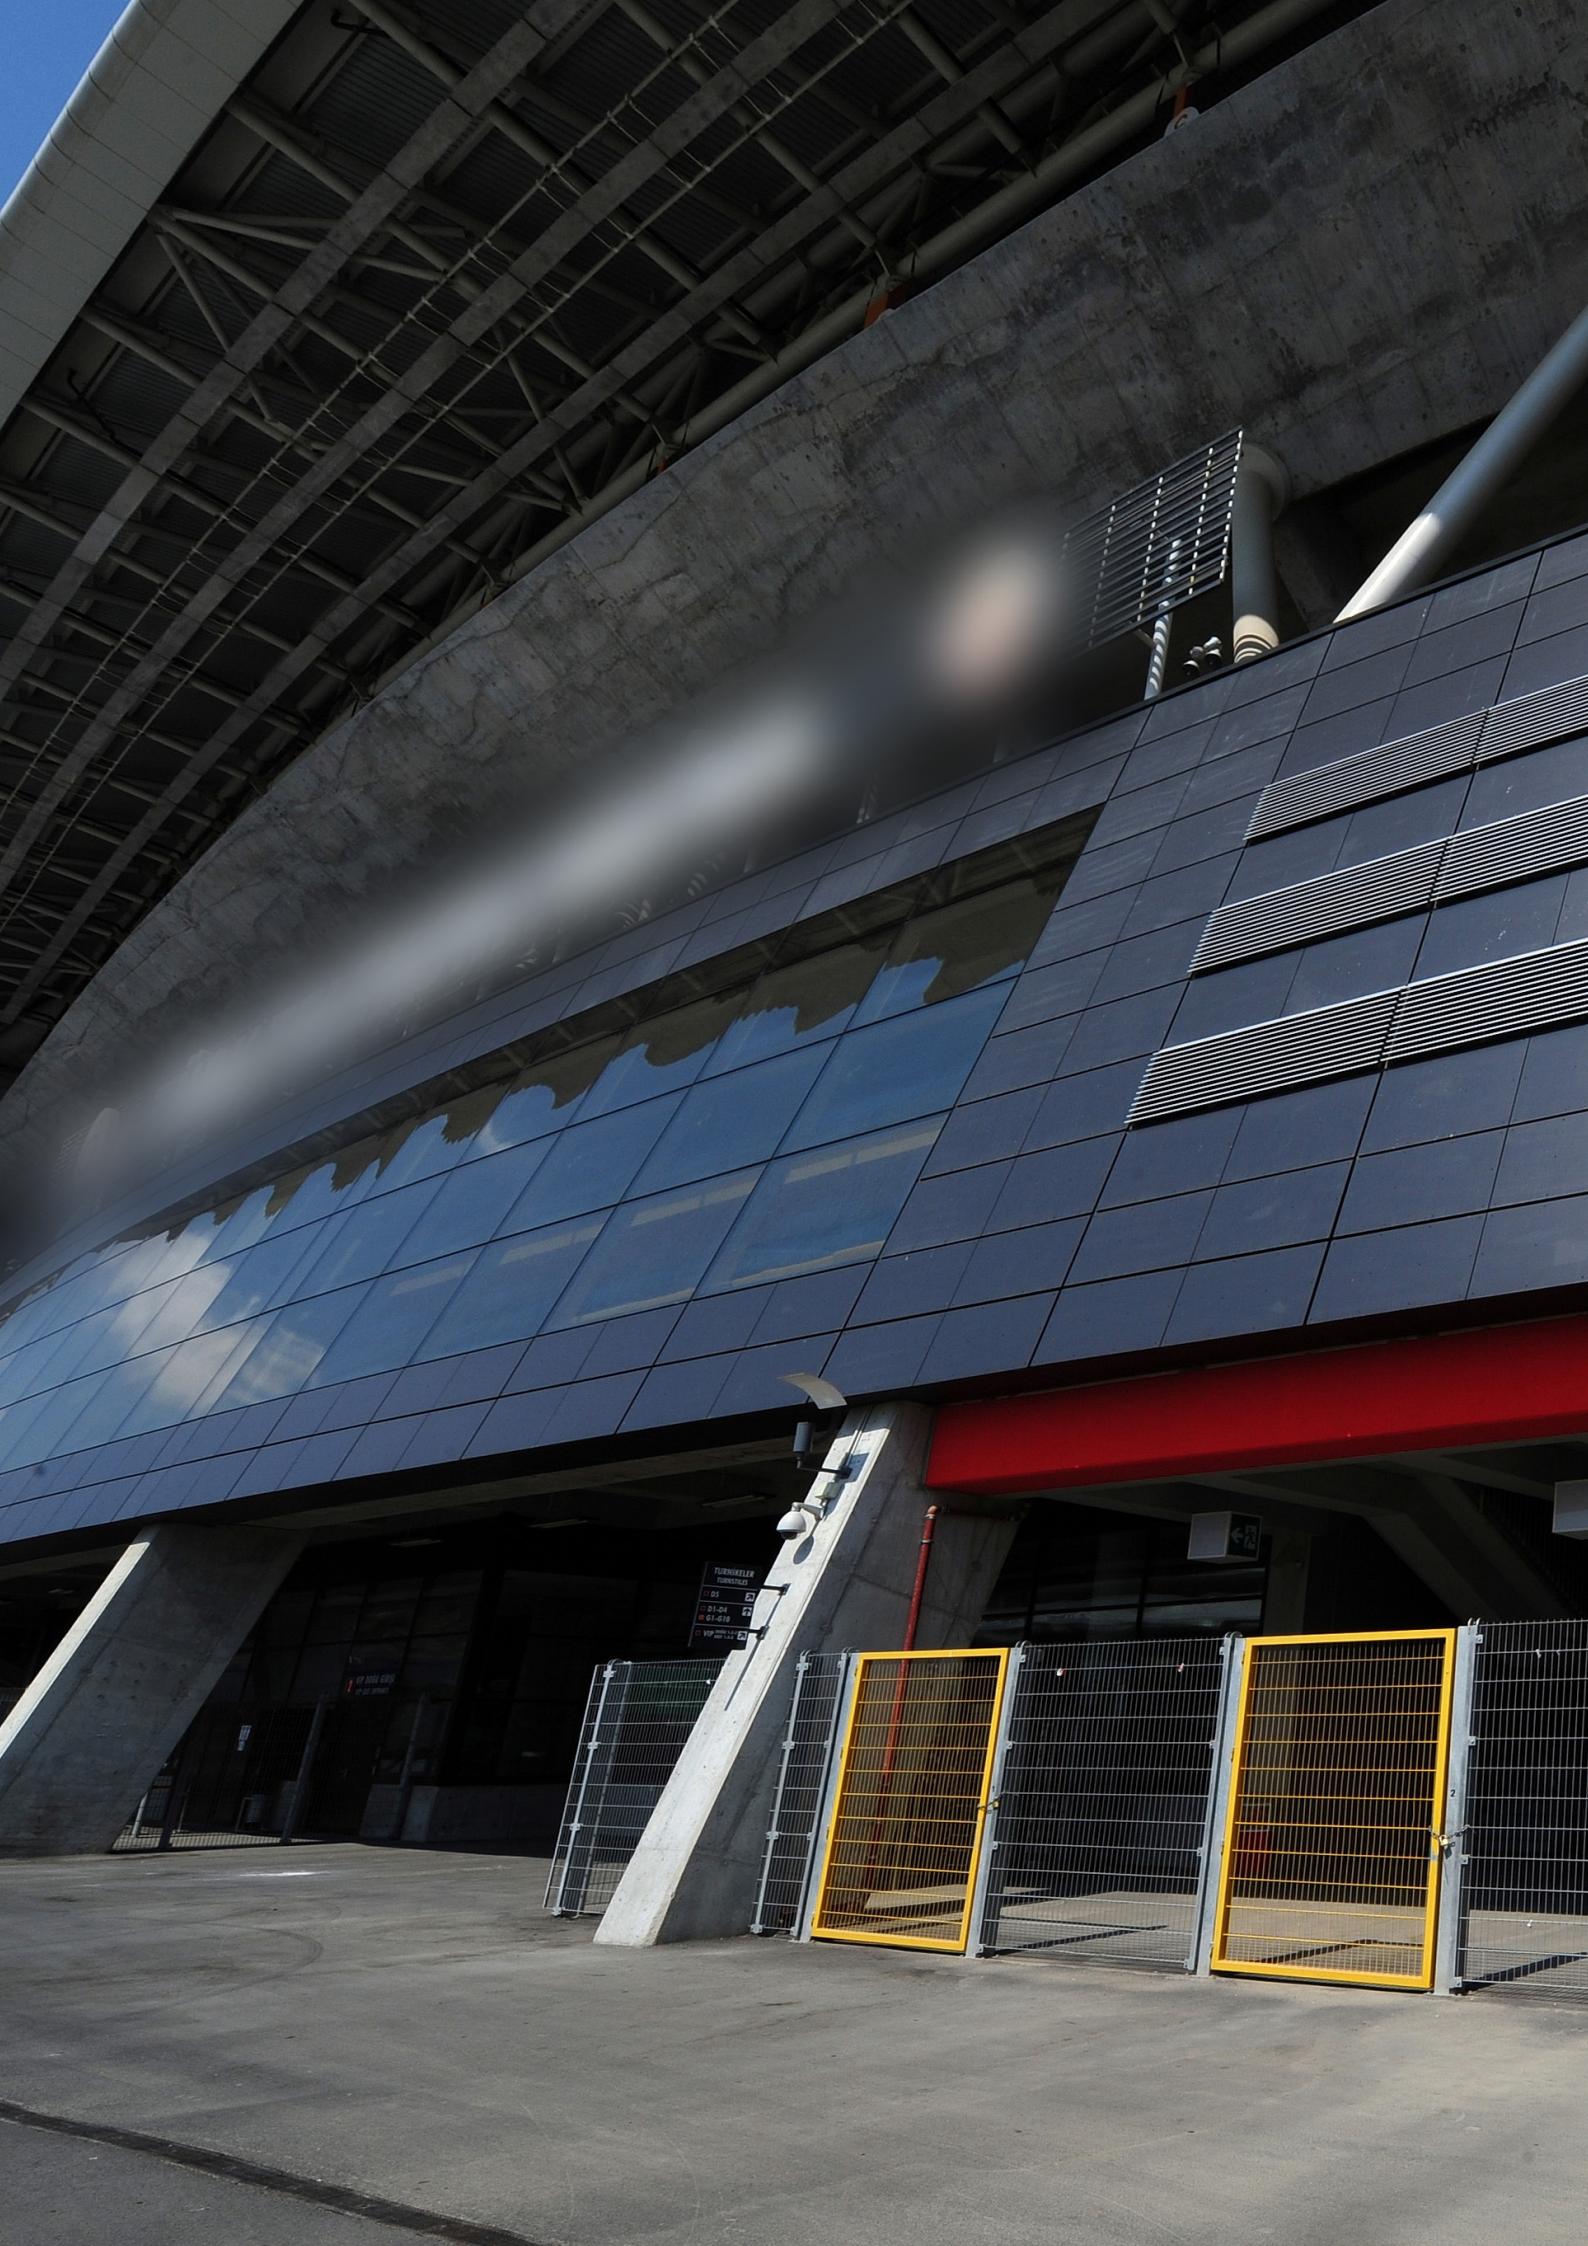

TURNSTILES
PARKING
01-04
05-09
10-14




BY GATE 1

D6


411 412

D6

413
414 415

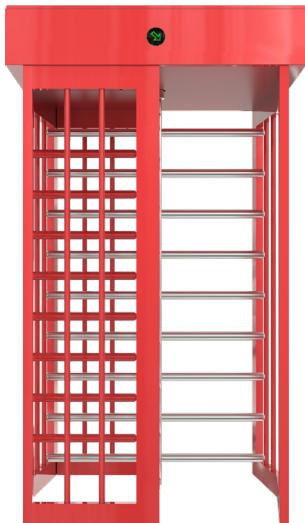

Dimensions (mm)

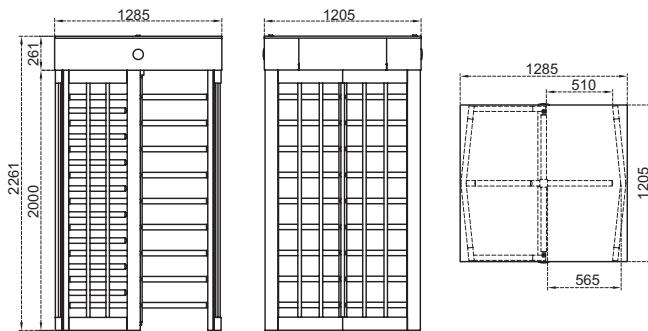


Technical Features

Place of Use	Indoors, outdoors					
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.					
Operating Intensity	100%, 7/24 use.					
<p>Built on main carriers and supported with pipe beams on sides, consisting of waterproof and protected top lid, mechanical compartment side panels and completely closed ceiling. Can be completely disassembled.</p> <p>Four-section rotor (90°), each having 9 (10 in optional 2120 mm clear passage height) one by one demountable arms.</p> <p>Optionally complies with UK H&S regulation of ≤98 mm gap between upright profiles.</p>						
Combination options with different material choices:						
Body / Arm Features	BT 402	BT 402-25	BT 402-100			
Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel			
Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.			
(*) Finishing : Satine brushed (opt. electrostatic powder coating on stainless steel).						
Indicators / Illumination	Status - Direction Indicators :   LED, standard/LED passageway illumination standard.					
Power	Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC. Consumption : ~8,1W at stand-by, during passage ~7,6W (varies according to the options and accessories used).					
System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card.						
Operating Modes	Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled			
Single input both directions use						
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).					
All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected.						
Control System	Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.					
Flow Rate	Passage capacity (manual) : max. 48 cycle/min. Nominal : ~25 pass/min. Passage capacity (motorized) : max. 40 cycle/min. Nominal : ~20 pass/min. (nominal passage rate can change depending on the access control system utilized)					
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.					
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.					
Weight	~235 kg					
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, 2120 mm clear passage height, mechanics compartment accessibility from the ceiling, trombone arms, different color choices, comp-liance with UK H&S regulation of ≤98 mm gap between upright profiles.					



Dimensions (mm)

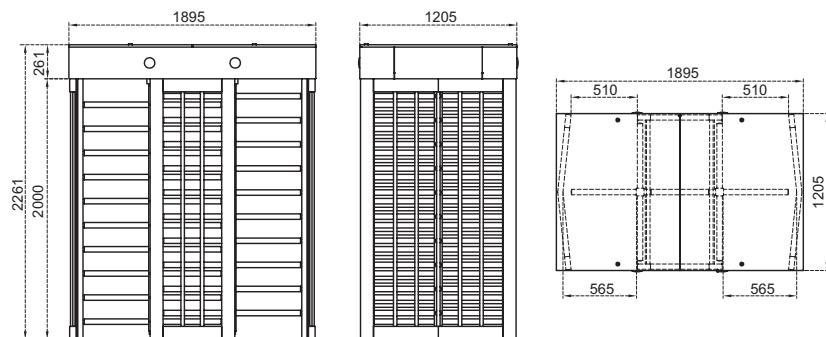

Technical Features


Place of Use	Indoors, outdoors
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.
Operating Intensity	100%, 7/24 use.
Built on main carriers and supported with pipe beams on sides, consisting of waterproof and protected top lid, mechanical compartment side panels and completely closed ceiling. Can be completely disassembled. A pair of four-section rotors (90°), each having 10+10 (11+11 in optional 2120 mm clear passage height) one by one demountable arms. Optionally complies with UK H&S regulation of ≤98 mm gap between upright profiles.	
Combination options with different material choices:	

	BT 402 D	BT 402 D-25	BT 402 D-100
Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel
Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.


(*) Finishing : Satine brushed (opt. electrostatic powder coating on stainless steel).

Indicators / Illumination	Status - Direction Indicators : LED, standard/LED passageway illumination standard.
Power	Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC. Consumption : ~16,2W at stand-by, during passage ~7,6+7,6W (varies according to the options and accessories used).
Operating Modes	System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card. Entry - exit controlled Entry controlled, exit free Entry free, exit controlled Single input both directions use Entry - exit free
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).
Control System	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.
Flow Rate	Passage capacity (manual) : max. 96 cycle/min. Nominal : ~50 pass/min. Passage capacity (motorized) : max. 80 cycle/min. Nominal : ~40 pass/min. (nominal passage rate can change depending on the access control system utilized)
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.
Weight	~460 kg
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, 2120 mm clear passage height, mechanics compartment accessibility from the ceiling, different color choices, compliance with UK H&S regulation of ≤98 mm gap between upright profiles.

BTX 400 N1

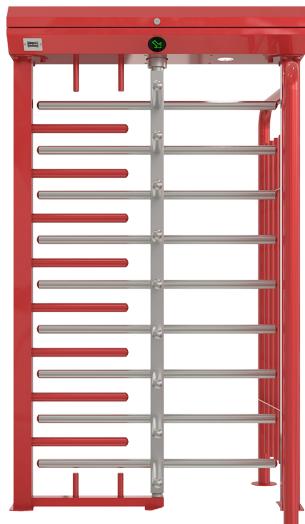

Dimensions (mm)

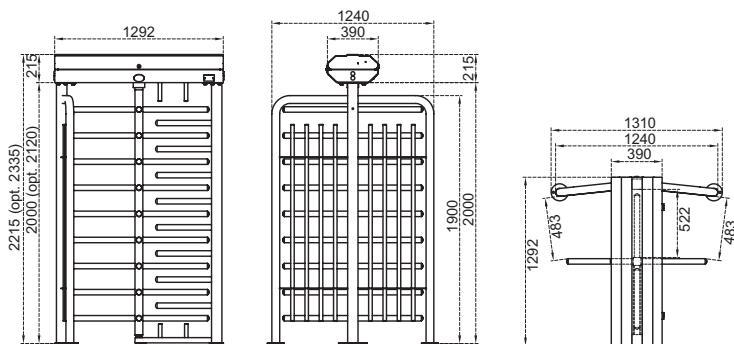


Technical Features

Place of Use	Indoors, outdoors					
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.					
Operating Intensity	100%, 7/24 use.					
<p>Built on main carriers and supported with pipe beams on sides, consisting of waterproof and protected top lid with damper for safety. Can be completely disassembled.</p> <p>Four-section rotor (90°), each having 9 (10 in optional 2120 mm clear passage height) one by one demountable arms.</p> <p>Complies with UK H&S regulation of ≤98 mm gap between upright profiles.</p>						
Combination options with different material choices:						
Body / Arm Features	BTX 400 N1	BTX 400 N1-25	BTX 400 N1-100			
	Body	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel			
Arms	Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.			
	(*) Finishing : Satin brushed (opt. electrostatic powder coating on stainless steel).					
Indicators / Illumination	Status - Direction Indicators : LED, standard/LED passageway illumination standard.					
Power	Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC. Consumption : ~8,1W at stand-by, during passage ~7,6W (varies according to the options and accessories used).					
Operating Modes	System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card.					
	Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled			
Operating System	Single input both directions use					
	Entry - exit free					
Control System	Electromechanical manual operation (opt. electromechanical motorized operation).					
	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected.					
Flow Rate	Controllable by dry contact (ground control). Compatible with all kinds of access control device.					
	Optional RS232, RS485 or TCP/IP module is available.					
Emergency Mode	Passage capacity (manual) : max. 48 cycle/min. Nominal : ~25 pass/min. Passage capacity (motorized) : max. 40 cycle/min. Nominal : ~20 pass/min.					
	(nominal passage rate can change depending on the access control system utilized)					
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.					
	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.					
Weight	~175 kg					
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, 2120 mm clear passage height, mechanics compartment accessibility from the ceiling, trombone arms, different color choices.					



Dimensions (mm)

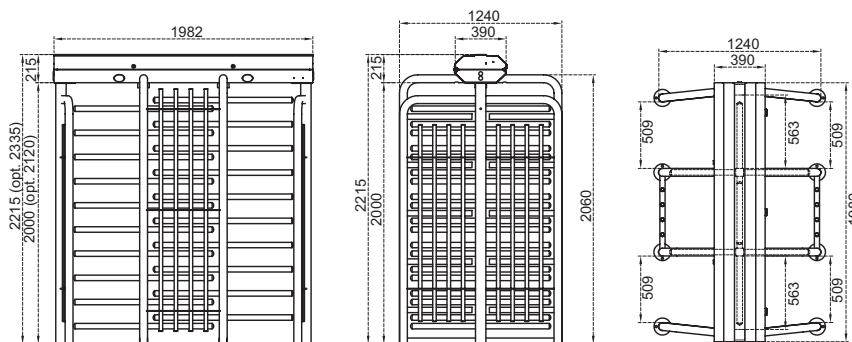

Technical Features

Place of Use	Indoors, outdoors								
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.								
Operating Intensity	100%, 7/24 use.								
<p>Built on main carriers and supported with pipe beams on sides, consisting of waterproof and protected top lid with damper for safety. Can be completely disassembled.</p> <p>A pair of four-section rotors (90°), each having 10+10 (11+11 in optional 2120 mm clear passage height) one by one demountable arms.</p> <p>Complies with UK H&S regulation of ≤98 mm gap between upright profiles.</p>									
Body / Arm Features	Combination options with different material choices:								
	BTX 400 N1 D	BTX 400 N1 D-25	BTX 400 N1 D-100						
Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel						
Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.						
(*) Finishing : Satine brushed (opt. electrostatic powder coating on stainless steel).									
Indicators / Illumination	Status - Direction Indicators : LED, standard/LED passageway illumination standard.								
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC.</p> <p>Consumption : ~16,2W at stand-by, during passage ~7,6+7,6W (varies according to the options and accessories used).</p>								
Operating Modes	<p>System operates bi-directionally (entry-exit).</p> <p>Operating modes can be adjusted through the buttons and screen on the control card.</p> <table> <tr> <td>Entry - exit controlled</td> <td>Entry controlled, exit free</td> <td>Entry free, exit controlled</td> </tr> <tr> <td>Single input both directions use</td> <td>Entry - exit free</td> <td></td> </tr> </table>			Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled	Single input both directions use	Entry - exit free	
Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled							
Single input both directions use	Entry - exit free								
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).								
Control System	<p>All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card.</p> <p>All inputs are opto-coupler protected.</p> <p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available.</p>								
Flow Rate	<p>Passage capacity (manual) : max. 96 cycle/min. Nominal : ~50 pass/min.</p> <p>Passage capacity (motorized) : max. 80 cycle/min. Nominal : ~40 pass/min.</p> <p>(nominal passage rate can change depending on the access control system utilized)</p>								
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.								
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.								
Weight	~420 kg								
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, 2120 mm clear passage height, mechanics compartment accessibility from the ceiling, different color choices.								

ULDUZLAR ARENASI SİZİ SALAMLAYIR!

FRANCE

RİŞ

PUBLIC ENTRANCE

ÜMÜMİ GİRİŞ




ULUDÜZLER ARENASI SİZİ SALAMLIYAT!

ULUDÜZLER ARENASI SİZİ SALAMLIYAT!


PUBLIC ENTRANCE

GİRİŞ

BTC 400

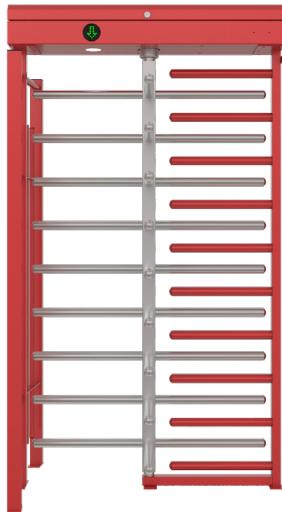


Dimensions (mm)

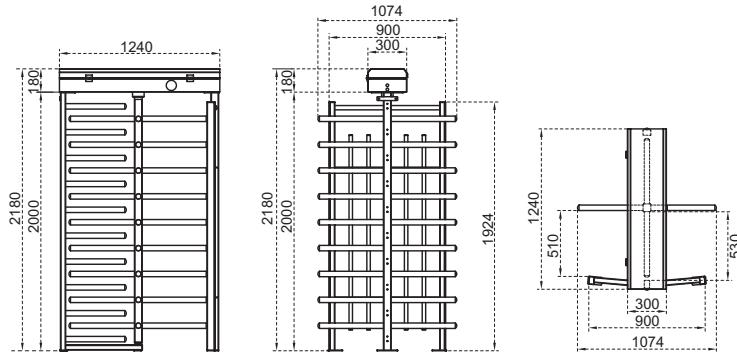


Technical Features

Place of Use	Indoors, outdoors					
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.					
Operating Intensity	100%, 7/24 use.					
<p>Built on main carriers and supported with pipe beams on sides, consisting of waterproof and protected top lid with damper for safety. Can be completely disassembled.</p> <p>Four-section rotor (90°), each having 9 (10 in optional 2120 mm clear passage height) one by one demountable arms.</p> <p>Optionally complies with UK H&S regulation of ≤98 mm gap between upright profiles.</p>						
Combination options with different material choices:						
Body / Arm Features	BTC 400	BTC 400-25	BTC 400-100			
	Body Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel			
	Arms Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.			
	(*) Finishing : Satin brushed (opt. electrostatic powder coating on stainless steel).					
Indicators / Illumination	Status - Direction Indicators : LED, standard/LED passageway illumination standard.					
Power	Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC. Consumption : ~8,1W at stand-by, during passage ~7,6W (varies according to the options and accessories used).					
Operating Modes	System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card.					
	Entry - exit controlled Single input both directions use	Entry controlled, exit free Entry - exit free	Entry free, exit controlled			
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).					
Control System	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected.					
	Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.					
Flow Rate	Passage capacity (manual) : max. 48 cycle/min. Nominal : ~25 pass/min. Passage capacity (motorized) : max. 40 cycle/min. Nominal : ~20 pass/min. (nominal passage rate can change depending on the access control system utilized)					
	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.					
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.					
Power-off Situation						
Weight	~145 kg					
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, 2120 mm clear passage height, trombone arms, different color choices, compliance with UK H&S regulation (≤98 mm gap between up-right profiles).					

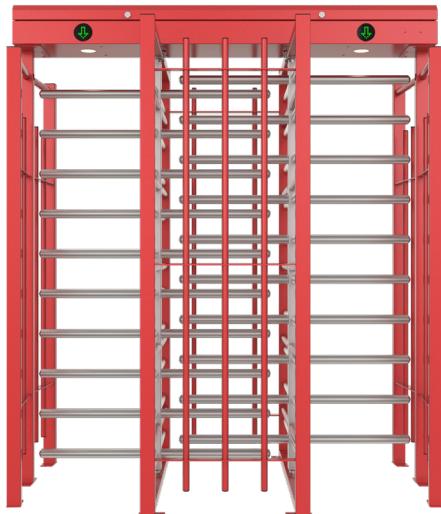

Dimensions (mm)

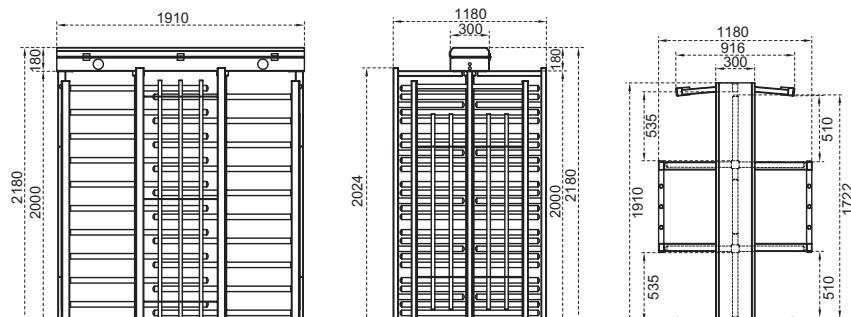


Technical Features

Place of Use	Indoors, outdoors					
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.					
Operating Intensity	100%, 7/24 use.					
Built on main carriers and supported with pipe beams on sides, consisting of waterproof and protected top lid with damper for safety. Can be completely disassembled.						
A pair of four-section rotors (90°), each having 10+10 (11+11 in optional 2120 mm clear passage height) one by one demountable arms.						
Optionally complies with UK H&S regulation of ≤98 mm gap between upright profiles.						
Combination options with different material choices:						
Body / Arm Features	BTC 400 D	BTC 400 D-25	BTC 400 D-100			
	Body Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel			
	Arms Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.			
	(* Finishing : Satin brushed (opt. electrostatic powder coating on stainless steel).)					
Indicators / Illumination	Status - Direction Indicators : LED, standard/LED passageway illumination standard.					
Power	Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC. Consumption : ~16,2W at stand-by, during passage ~7,6+7,6W (varies according to the options and accessories used).					
System operates bi-directionally (entry-exit).						
Operating Modes	Operating modes can be adjusted through the buttons and screen on the control card. Entry - exit controlled Entry controlled, exit free Entry free, exit controlled Single input both directions use Entry - exit free					
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).					
All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected.						
Control System	Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.					
Flow Rate	Passage capacity (manual) : max. 96 cycle/min. Nominal : ~50 pass/min. Passage capacity (motorized) : max. 80 cycle/min. Nominal : ~40 pass/min. (nominal passage rate can change depending on the access control system utilized)					
	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.					
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.					
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.					
Weight	~345 kg					
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, 2120 mm clear passage height, different color choices, compliance with UK H&S regulation of ≤98 mm gap between upright profiles.					

BTG 400




Dimensions (mm)

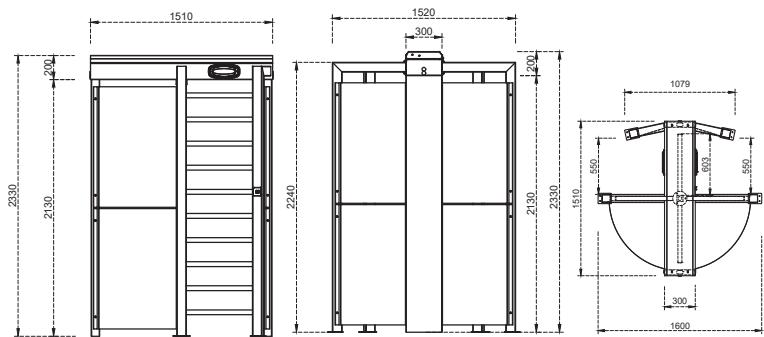

Place of Use	Indoors, outdoors								
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.								
Operating Intensity	100%, 7/24 use.								
<p>Built on main carriers and supported with profiles on sides and perforated sheet separators, consisting of waterproof and protected top lid with damper for safety. Can be completely disassembled.</p> <p>Four-section rotor (90°), each having 10 one by one demountable arms.</p>									
Combination options with different material choices:									
Body / Arm Features	BTG 400	BTG 400 - 25	BTG 400 -100						
	Body	Electrostatic powder coating on hot-dip galvanized steel	304 grade stainless steel						
	Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade stainless steel, Ø40x2,0 mm.						
	Perforated Sheet Separators	304 grade stainless steel	304 grade stainless steel						
Indicators / Illumination	Status - Direction Indicators :  LED, standard/LED passageway illumination standard.								
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC.</p> <p>Consumption : ~8,1W at stand-by, during passage ~7,6W (varies according to the options and accessories used).</p>								
Operating Modes	<p>System operates bi-directionally (entry-exit).</p> <p>Operating modes can be adjusted through the buttons and screen on the control card.</p> <table> <tr> <td>Entry - exit controlled</td> <td>Entry controlled, exit free</td> <td>Entry free, exit controlled</td> </tr> <tr> <td>Single input both directions use</td> <td>Entry - exit free</td> <td></td> </tr> </table>			Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled	Single input both directions use	Entry - exit free	
Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled							
Single input both directions use	Entry - exit free								
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).								
Control System	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card.								
	All inputs are opto-coupler protected.								
	Controllable by dry contact (ground control).								
	Compatible with all kinds of access control device.								
Flow Rate	Optional RS232, RS485 or TCP/IP module is available.								
	Passage capacity (manual) : max. 48 cycle/min. Nominal : ~25 pass/min.								
	Passage capacity (motorized) : max. 40 cycle/min. Nominal : ~20 pass/min.								
(nominal passage rate can change depending on the access control system utilized)									
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.								
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.								
Weight	~300 kg								
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, bottom plate (standard or for forklift handling), battery back-up, RS232-RS485-TCP/IP modules, limiter, different color choices.								



Dimensions (mm)

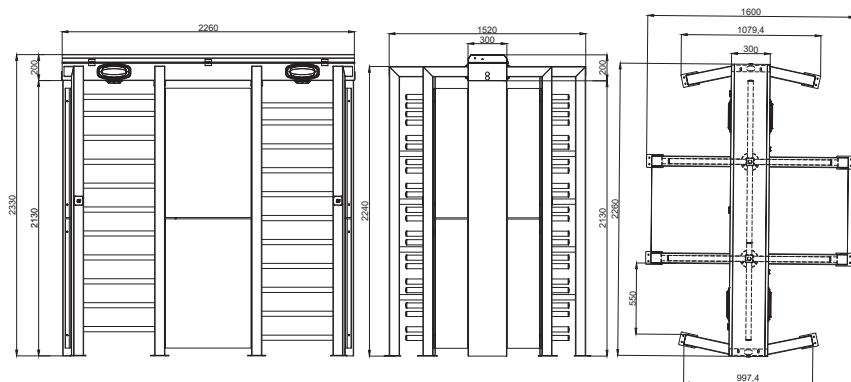

Place of Use	Indoors, outdoors					
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.					
Operating Intensity	100%, 7/24 use.					
<p>Built on main carriers and supported with profiles on sides and perforated sheet separators, consisting of waterproof and protected top lid with damper for safety. Can be completely disassembled.</p> <p>A pair of four-section rotors (90°), each having 11+11 one by one demountable arms.</p>						
Combination options with different material choices:						
Body / Arm Features	BTG 400 D	BTG 400 D - 25	BTG 400 D - 100			
	Body	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel			
	Arms	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade stainless steel, Ø40x2,0 mm.			
	Perforated Sheet Separators	304 grade stainless steel	304 grade stainless steel			
			304 grade stainless steel			
Indicators / Illumination	Status - Direction Indicators : LED, standard/LED passageway illumination standard.					
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC.</p> <p>Consumption : ~16,2W at stand-by, during passage ~7,6+7,6W (varies according to the options and accessories used).</p>					
System operates bi-directionally (entry-exit).						
Operating Modes	<p>Operating modes can be adjusted through the buttons and screen on the control card.</p> <p>Entry - exit controlled Entry controlled, exit free Entry free, exit controlled</p> <p>Single input both directions use Entry - exit free</p>					
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).					
All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card.						
All inputs are opto-coupler protected.						
Control System	<p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available.</p>					
Flow Rate	<p>Passage capacity (manual) : max. 96 cycle/min. Nominal : ~50 pass/min.</p> <p>Passage capacity (motorized) : max. 80 cycle/min. Nominal : ~40 pass/min.</p> <p>(nominal passage rate can change depending on the access control system utilized)</p>					
	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.					
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.					
Power-off Situation						
Weight	~425 kg					
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, bottom plate (standard or for forklift handling), battery back-up, RS232-RS485-TCP/IP modules, limiter, different color choices.					




EXIT GATES


104 BT 100 (MOTORIZED)
105 PEGA 100 (MANUAL)

CAME  **ÖZAK**

BT 100 (MOTORIZED)

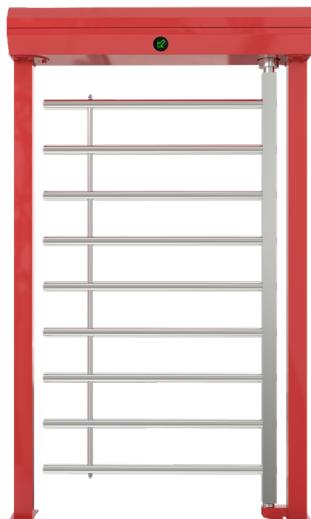

Dimensions (mm)

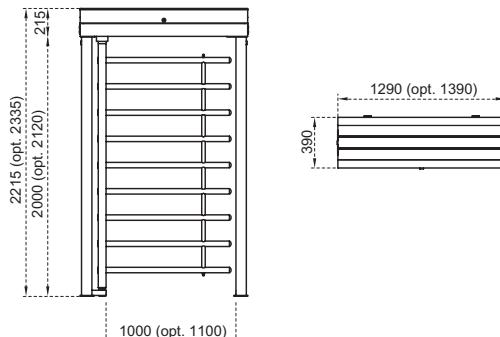


Technical Features

Place of Use	Indoors, outdoors					
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.					
Operating Intensity	100%, 7/24 use.					
Built on box beam main carriers and consisting of waterproof and protected top lid with damper for safety. Can be completely disassembled.						
Single-section rotor having 9 (10 in optional 2120 mm clear passage height) one by one demountable arms.						
Combination options with different material choices:						
Body / Arm Features	BT 100	BT 100-25	BT 100-100			
	Body Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel			
	Arms Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.			
	(*) Finishing : Satine brushed (opt. electrostatic powder coating on stainless steel).					
Indicators / Illumination	Status - Direction Indicators : LED, standard/LED passageway illumination standard.					
Power	Operating Voltage : 110/220V AC 50/60 Hz. (%±10), 24V DC. Consumption : ~8W at stand-by, max ~44W (varies according to the options and accessories used).					
Operating Modes	System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card.					
	Entry - exit controlled optional photocell support	Entry - exit free (with optional photocell support) Entry free, exit controlled (with optional photocell support)	Entry controlled, exit free (with optional photocell support)			
Operating System	Electromechanical motorized operation.					
Control System	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected.					
	Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.					
Flow Rate	Wing opening/closing time : ~1,5 sec.					
Emergency Mode	System provides a free passageway (entry-exit) by opening the wing in preferred direction configured by dip switch (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.					
Power-off Situation	System provides a free passageway (entry-exit) by manually pushing the wing towards entry or exit directions (fail safe). Optionally, can be set as entry-exit locked (fail secure). Free passageway can be granted by manual override key in fail secure option.					
Weight	~105 kg					
Optional Features and Accessories	Wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, 2120 mm clear passage height, 900-1100 mm clear passage width, trombone arms, photocell for free mode, different color choices.					



Dimensions (mm)

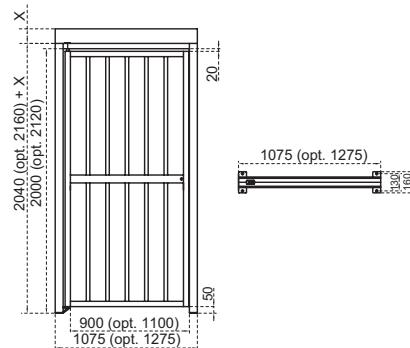

Technical Features

Place of Use	Indoors, outdoors					
Operating Intensity	100%, 7/24 use.					
Built on box beam main carriers and consisting of complementary top panels. 90° opening wing frame consists of box beams and pipes.						
Combination options with different material choices:						
Body / Wing Features	PEGA 100	PEGA 100-25	PEGA 100-100			
	Body Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel			
	Wing Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade)* stainless steel	304 grade (opt. 316 grade)* stainless steel.			
	(* Finishing : Satine brushed (opt. electrostatic powder coating on stainless steel).)					
Power	Operating Voltage : None for standard model (24V DC for optional electromagnetic lock).					
Operating Modes	System operates uni-directionally (clockwise or anti-clockwise). Wing opens and closes 90° by pushing.					
Operating System	Mechanical manual operation with standard manual lock.					
Emergency Mode	System provides a free passageway (entry-exit) by opening the lock manually and pushing the wing. Wing becomes free for a passageway (entry-exit) with optional electromagnetic lock and works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode (in case there is a hydraulic door closer).					
Power-off Situation	Electromagnetic lock (if any) becomes disabled, and the wing is pushed manually to create a free passageway.					
Weight	~60 kg					
Optional Features and Accessories	Wireless remote control (receiver-transmitter, with electromagnetic lock option), manual control (with electromagnetic lock option), electromagnetic lock, 316 grade stainless steel, 2120 mm clear passage height, 900-1100 mm clear passage width, LED status indicator (with electromagnetic lock option), hydraulic door closer, different color choices.					




GLASS FULL HEIGHT SERIES

108 BT 302 GL
109 BT 402 GL

CAME ÖZAK



Dimensions (mm)

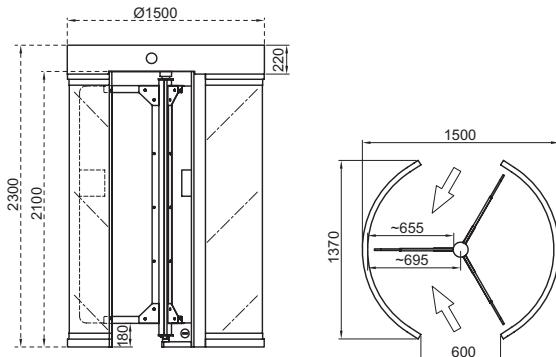


Technical Features

Place of Use	Indoors (opt. outdoors)				
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.				
Operating Intensity	100%, 7/24 use.				
Body / Wing Features	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Body</td><td style="padding: 2px;">304 grade (opt. 316 grade)* stainless steel body and 4+4 mm laminated glass walls.</td></tr> <tr> <td style="padding: 2px;">Wings</td><td style="padding: 2px;">12 mm tempered glass mounted on 304 grade (opt. 316 grade)* stainless steel rotor.</td></tr> </table>	Body	304 grade (opt. 316 grade)* stainless steel body and 4+4 mm laminated glass walls.	Wings	12 mm tempered glass mounted on 304 grade (opt. 316 grade)* stainless steel rotor.
Body	304 grade (opt. 316 grade)* stainless steel body and 4+4 mm laminated glass walls.				
Wings	12 mm tempered glass mounted on 304 grade (opt. 316 grade)* stainless steel rotor.				
	(*) Finishing : Orbital brushed matt.				
Indicators / Illumination	Status - Direction Indicators : LED, standard/LED passageway illumination standard.				
Power	Operating Voltage : 110/220V AC 50/60 Hz. (%±10), 24V DC. Consumption : ~14W at stand-by, max ~50W (varies according to the options and accessories used).				
Operating Modes	System operates bi-directionally (entry-exit). Operation modes can be changed through dip switch, IOS and/or android app. Entry - exit controlled Entry controlled, exit free Entry free, exit controlled Single input both directions use Entry - exit free				
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).				
Control System	All functions, parameters and operating modes can be changed through the control board (microprocessor controlled), IOS and/or android app. Firmware can be updated. All past function updates and changes are kept in the server and records can be traced. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.				
Flow Rate	Passage capacity (manual) : max. 30 cycle/min. Nominal : ~20 pass/min. Passage capacity (motorized) : max. 20 cycle/min. Nominal : ~15 pass/min. (nominal passage rate can change depending on the access control system utilized)				
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.				
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.				
Weight	~560 kg				
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter.				





Dimensions (mm)

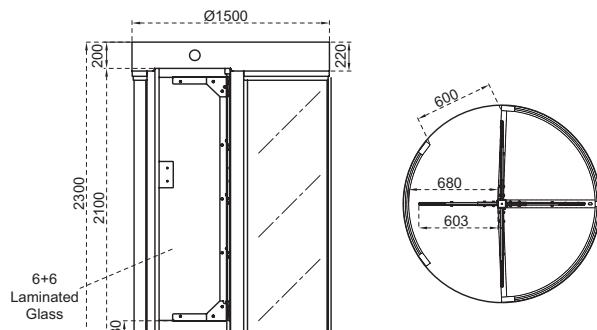

Technical Features

Place of Use	Indoors, (opt. outdoors)						
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.						
Operating Intensity	100%, 7/24 use.						
Built on stainless steel main carrier beams, supported with box beams on sides, contains rounded glass walls, protecting top lid, mechanical compartment side panels and completely closed ceiling. The mechanics compartment is accessible from the ceiling. Contains four-wings rotor (90°).							
Body / Wing Features	<table border="1"> <tr> <td>Body</td><td>304 grade (opt. 316 grade)* stainless steel body and 4+4 mm laminated glass walls.</td></tr> <tr> <td>Wings</td><td>12 mm tempered glass mounted on 304 grade (opt. 316 grade)* stainless steel rotor.</td></tr> </table>	Body	304 grade (opt. 316 grade)* stainless steel body and 4+4 mm laminated glass walls.	Wings	12 mm tempered glass mounted on 304 grade (opt. 316 grade)* stainless steel rotor.		
Body	304 grade (opt. 316 grade)* stainless steel body and 4+4 mm laminated glass walls.						
Wings	12 mm tempered glass mounted on 304 grade (opt. 316 grade)* stainless steel rotor.						
(* Finishing : Orbital brushed matt.)							
Indicators / Illumination	Status - Direction Indicators :   LED, standard/LED passageway illumination standard.						
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (±10%), 24V DC.</p> <p>Consumption : ~14W at stand-by, max ~50W (varies according to the options and accessories used).</p>						
Operating Modes	<p>System operates bi-directionally (entry-exit).</p> <p>Operation modes can be changed through dip switch, IOS and/or android app.</p> <table> <tr> <td>Entry - exit controlled</td> <td>Entry controlled, exit free</td> <td>Entry free, exit controlled</td> </tr> <tr> <td>Single input both directions use</td> <td>Entry - exit free</td> <td></td> </tr> </table>	Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled	Single input both directions use	Entry - exit free	
Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled					
Single input both directions use	Entry - exit free						
Operating System	Electromechanical manual operation (opt. electromechanical motorized operation).						
Control System	<p>All functions, parameters and operating modes can be changed through the control board (microprocessor controlled), IOS and/or android app. Firmware can be updated. All past function updates and changes are kept in the server and records can be traced.</p> <p>All inputs are opto-coupler protected.</p> <p>Controllable by dry contact (ground control).</p> <p>Compatible with all kinds of access control device.</p> <p>Optional RS232, RS485 or TCP/IP module is available.</p>						
Flow Rate	<p>Passage capacity (manual) : max. 30 cycle/min. Nominal : ~20 pass/min.</p> <p>Passage capacity (motorized) : max. 20 cycle/min. Nominal : ~15 pass/min.</p> <p>(nominal passage rate can change depending on the access control system utilized)</p>						
Emergency Mode	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.						
Power-off Situation	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.						
Weight	~590 kg						
Optional Features and Accessories	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter.						






HIGH SECURITY SERIES

112 CGG - SQ - AIR

CAME ÖZAK




Dimensions (mm)

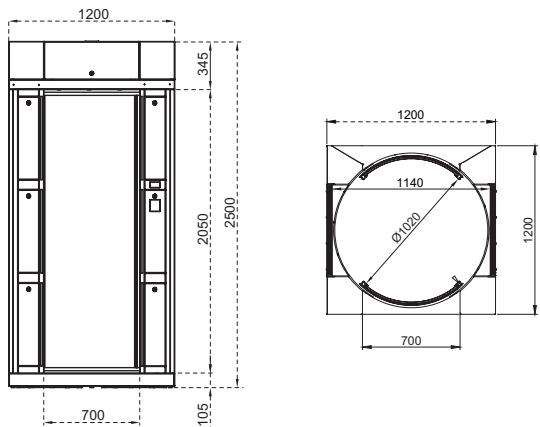

Technical Features

Place of Use	Indoors						
Operating Temperature, Humidity	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.						
Operating Intensity	100%, 7/24 use.						
Body / Door Features	<p>Made of 4 supporting main carrier columns placed on the lower chassis, glass walls and a completely closed ceiling with 2 lockable lids. Main carrier columns consist of 3 sections designed for installation of electronic system, card reader and access control systems. Optionally, a control point is available for real person verification (with biometric reader systems) with a column mounted in the passage corridor.</p> <p>System has a rotating door structure independently on the entry and exit sides consisting of box profiles and rounded glass walls on the edges.</p> <p>Gate is furnished with anti-tightening feature by rubber seals with pneumatic pressure sensor on glass doors and electronic torque control.</p>						
	<table border="1"> <tr> <td>Body</td><td>Electrostatic powder coated (RAL 7021) steel body, 4+4 mm laminated glass (opt. BR class bullet-proof glass) walls.</td></tr> <tr> <td>Doors</td><td>Electrostatic powder coated (RAL 7021) aluminium beams, 4+4 mm rounded laminated glass (opt. BR class bullet-proof glass).</td></tr> </table>	Body	Electrostatic powder coated (RAL 7021) steel body, 4+4 mm laminated glass (opt. BR class bullet-proof glass) walls.	Doors	Electrostatic powder coated (RAL 7021) aluminium beams, 4+4 mm rounded laminated glass (opt. BR class bullet-proof glass).		
Body	Electrostatic powder coated (RAL 7021) steel body, 4+4 mm laminated glass (opt. BR class bullet-proof glass) walls.						
Doors	Electrostatic powder coated (RAL 7021) aluminium beams, 4+4 mm rounded laminated glass (opt. BR class bullet-proof glass).						
	(*) Finishing : Orbital brushed matt.						
Indicators / Illumination	Status - Direction Indicators : DOT MATRIX and strip LED, standard / LED interior illumination standard.						
Power	<p>Operating Voltage : 110/220V AC 50/60 Hz. (%±10), 24V DC.</p> <p>Consumption : ~40W at stand-by, max ~130W (varies according to the options and accessories used).</p>						
Operating Modes	<p>System operates bi-directionally (entry-exit).</p> <p>Operation modes can be changed through dip switch, IOS and/or android app.</p> <table> <tr> <td>Entry - exit controlled</td> <td>Entry controlled, exit free</td> <td>Entry free, exit controlled</td> </tr> <tr> <td>Entry - exit free</td> <td>Entry-exit internal biometric control mode</td> <td></td> </tr> </table> <p>Can be customised for site specific access algorithms.</p>	Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled	Entry - exit free	Entry-exit internal biometric control mode	
Entry - exit controlled	Entry controlled, exit free	Entry free, exit controlled					
Entry - exit free	Entry-exit internal biometric control mode						

Operating System	<p>Electromechanical motorised doors are closed for both ways at stand-by (opt. open for one direction).</p> <p>Person requests authorisation from the access control device (3rd party device) connected to the gate's entry system. Upon authorisation, first door opens allowing person enter inside. First door closes upon detection of the person inside by the weight sensor on the gate floor (in case the person do not enter, door closes at the end of time-out set previously). At both doors in closed position, weight sensors (load cells) once more control the presence of the person inside. Second doors opens in case there is a person inside and if he is authorised for access (otherwise, second door never opens, gate returns the person to his entry direction or keeps the person locked inside). Upon exit of the person, second door closes and systems returns to stand-by for next passage.</p>
------------------	---

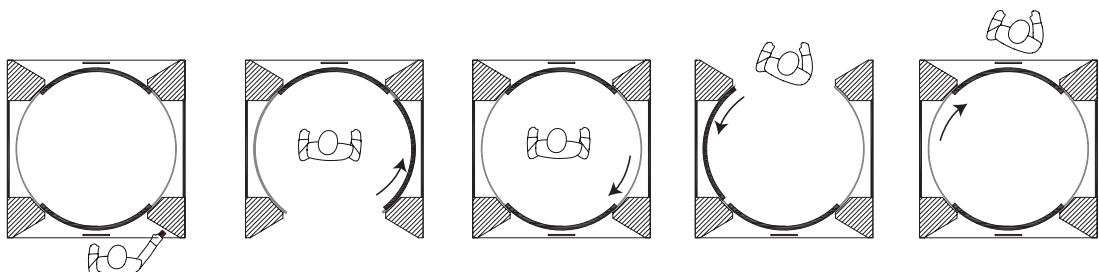

Optionally, a control point is available for real person verification (with 3rd party product biometric reader systems) with a column mounted in the passage corridor. Upon presence inside and at doors closed position, person requests a second authorisation and according to the authorisation, the second door opens and person completes his passage or returns to his entry direction. At the end of the process, door returns to stand-by position and remains locked.

In case of pushing the emergency rescue button inside the cabin, the entry door opens (or can be programmed for another action). Gate generates audio and/or visual alarm or relay output in cases of; passage can not be completed on time, the door is forced, presence of more than one person inside is detected, non-authorisation, the emergency rescue button is pushed, an unsolicited situation detected by the sensors.

All functions, parameters and operating modes can be changed through the control board (microprocessor controlled), IOS and/or android app. Firmware can be updated. All past function updates and changes are kept in the server and records can be traced.

All inputs are opto-coupler protected.

Controllable by dry contact (ground control).

Compatible with all kinds of access control device.

Optional RS232, RS485 or TCP/IP module is available.

Gate operates by a position controlled (by encoder) motor driven and electronic torque controlled system.

Functions such as all sensors, motor, indicators, passage scenarios and alarms are controlled by the electronic control unit containing a programmable microprocessor. Thanks to the microprocessors, no re-setting is necessary in case of a power failure. Electronic control unit is placed into the main carrier columns of the gate.

Passage can be restricted externally by enable/disable feature even though access authorisation has been granted.

Gate has a vibration resistant, microprocessor controlled, industrial design adaptable to meet any user demand. Motor driven, two independent mechanics systems are controlled by a single electronic control unit.

Rotation speed and limitations of the doors are managed by encoder controlled P.I.D. system. Rotation speeds are continuously checked with the feedback from the encoder and motor driver card keeps the speed at the same level preventing slower or faster rotation.

An electronic control card controlling the mechanics regulates all movements and outputs and in case of need a 485 output is optionally available for PC.

Control System


Flow Rate

Passage capacity (motorized) : ~4 person/min.

(Passage capacity can change depending on the access control system utilized)

Emergency Mode

Both doors open automatically and system allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.

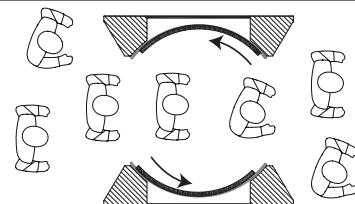

Power-off Situation

System allows free passage (entry-exit) in both directions (fail safe) by pushing the doors manually. Optionally, can be set entry-exit locked (fail secure). Free passage by manual override key in fail secure option is available.

Weight

~460 kg

Safety

Moving doors contain pneumatic soft pressure sensors. In addition to pneumatic sensors, electronic torque control feature has been added.

Continuous fresh air ventilation is provided in the passage area.

Cleaning, Maintenance, Manual Interference

Gate is furnished by a programmable key switch button on one side of the gate adjacent to the door.


This button is programmable for the function desired by the user and set as default for opening one door for cleaning-maintenance or can be programmed for various requirements (i.e. manually evacuation of the person inside, unlocking of 1st or 2nd door, etc).

Optional Features and Accessories

Interior biometric system mounting column, card reader mounting bracket, mounting/connection guide for any type of safety sensors and detectors, BR class bullet-proof glass, different color options, manual override key (with fail secure option), heater positive, battery back-up, RS232-RS485-TCP/IP modules, limiter, motorized card collector unit and card collection box.





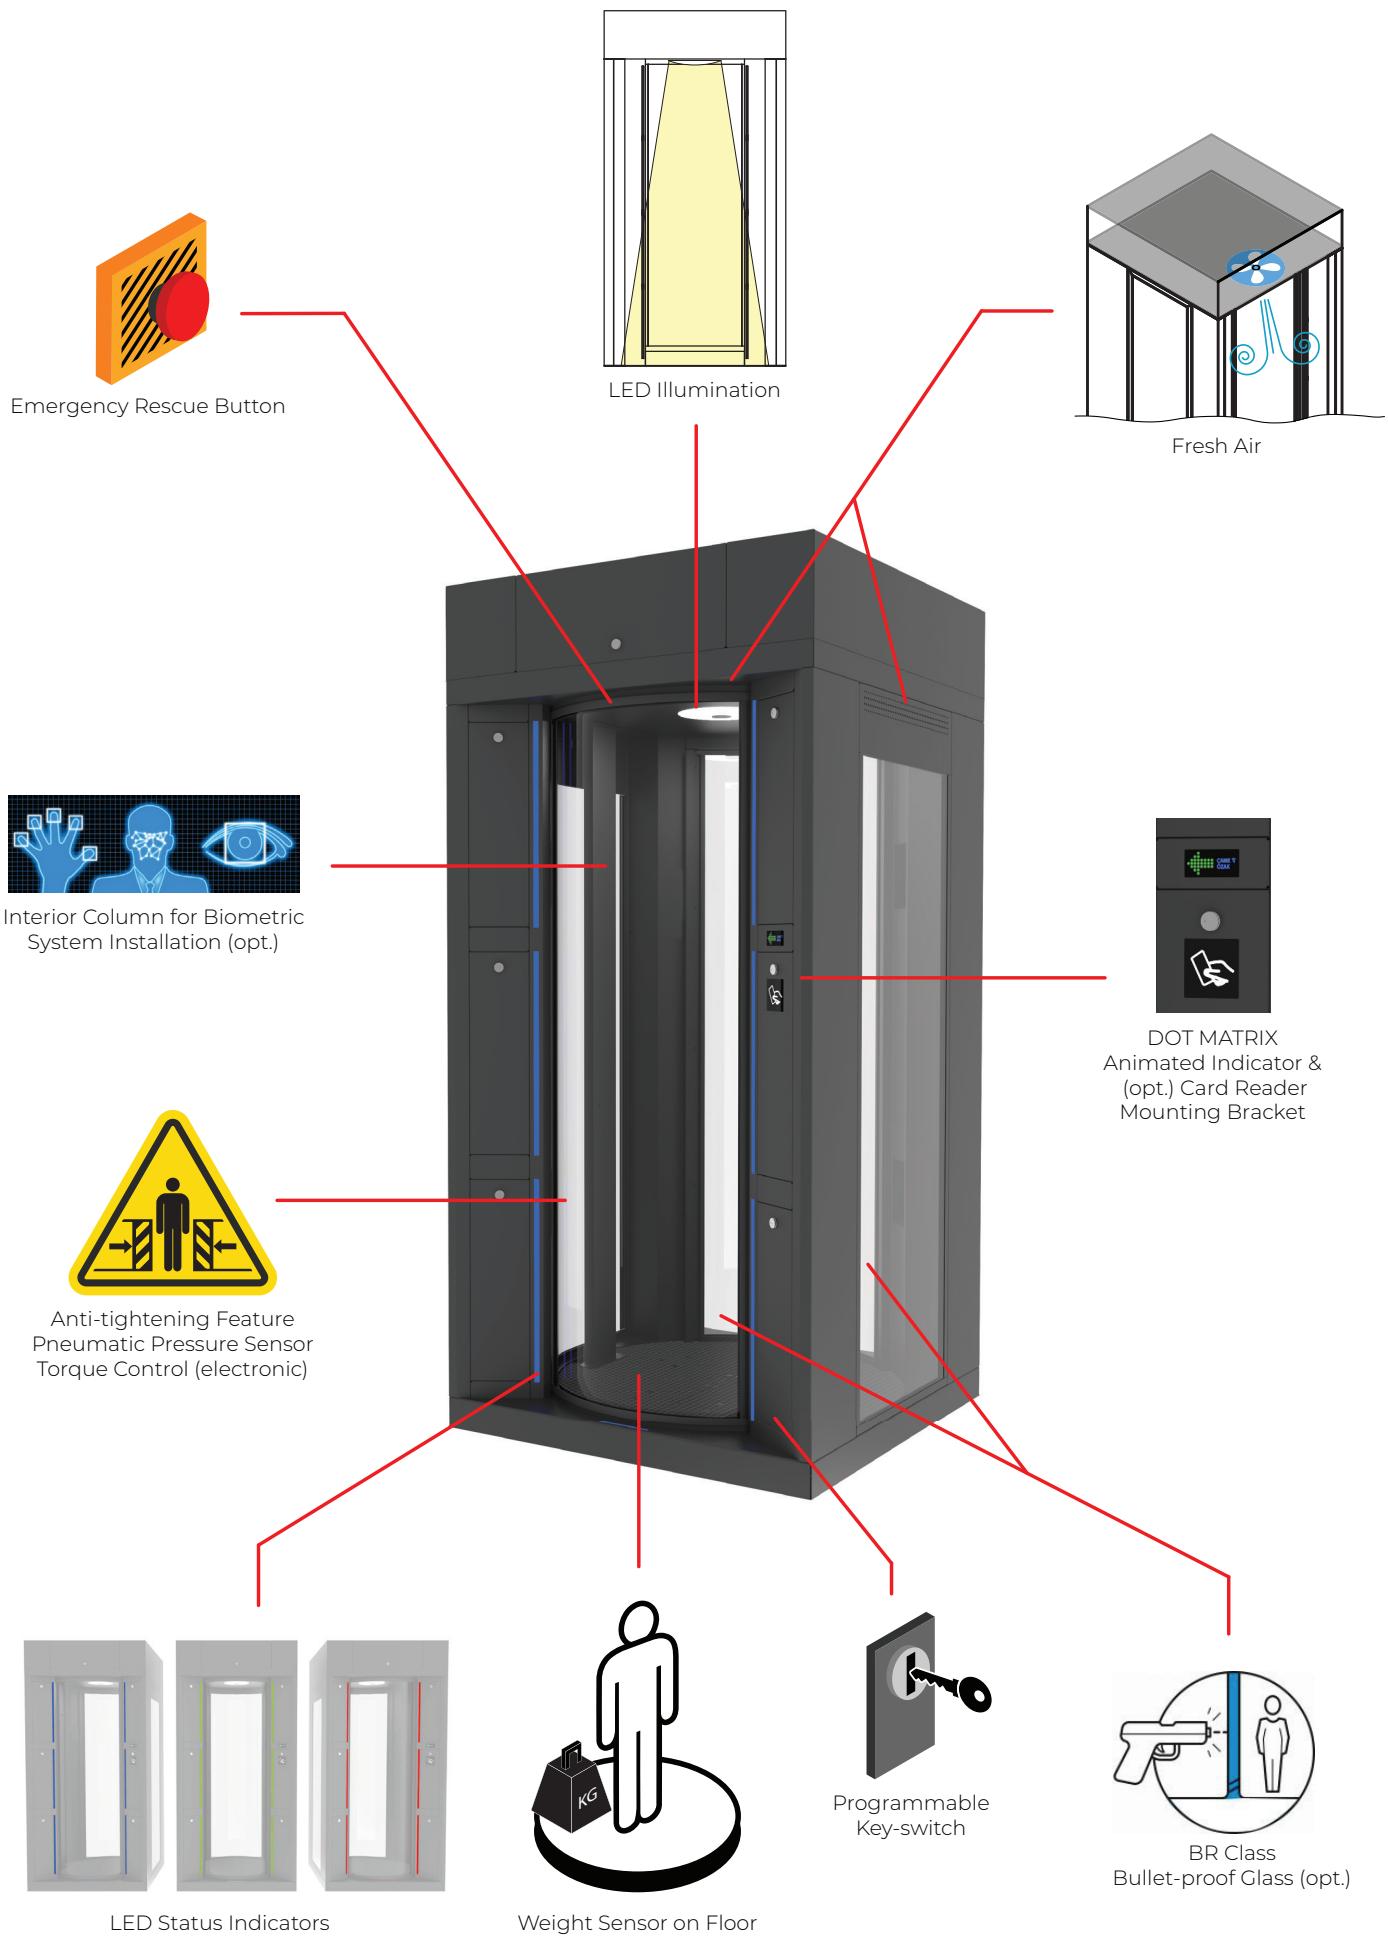





ZEB

Hepsiz İle Vip: 02.00

Kasaüstü: 23.00

Hepsiz 24 Saat Ağırlık: 00.80

Kasaüstü: 21.00

LİFTLER
OTEL OLUŞUMU
E-POZİT ADRESİNE
0212 230 00 00
8 BASAMAKLU
ŞİFRELEME
SÜREKLİ



**KAPİYİ
AÇMAK İÇİN**
1. ŞİF-
RENI
GİR
2. AVUÇ
İÇİNİ
OKUT



ACCESSORIES



Automatic Drop (Retractable) Arm



Manual Controls



Counter



Coin Mechanism



Card Reader Mounting Poles



Card Reader Mounting Brackets



CUSTOMISATIONS



CAME  **ÖZAK**

CAME ÖZAK

ÖZAK GEÇİŞ TEKNOLOJİLERİ

SAN. TİC. A.Ş.

Köseköy, Çuhane Cd.

N:130 41080 Kartep

Kocaeli / TÜRKİYE

Tel.: +90 262 373 48 48

CORPORATE HEADQUARTERS

CAME S.p.A.

Via Martiri della Libertà, 15

31030 Dosson di Casier

Treviso - ITALY

MANUFACTURING COMPANIES

CAME PARKARE GROUP S.L.

Barcelona, SPAIN

NEPOS SISTEMAS DE CONTROLE E AUTOMAÇÃO EM ESTACIONAMENTO E TRÁFEGO LTDA

São Paulo, BRAZIL

ÖZAK GEÇİŞ TEKNOLOJİLERİ

SAN. TİC. A.Ş.

Kocaeli, TÜRKİYE

COMMERCIAL BRANCHES EUROPE

ITALY

CAME ITALIA S.r.l.

Treviso

BELGIUM

CAME BENELUX S.A.

Lessines

CROATIA

CAME ADRIATIC d.o.o.

Kastav

FRANCE

CAME FRANCE S.A.S.

Paris

GERMANY

CAME DEUTSCHLAND GmbH

Stuttgart

IRELAND

CAME BPT IRELAND LIMITED

Dublin

THE NETHERLANDS

CAME NEDERLAND B.V.

Breda

POLAND

CAME POLAND Sp. z o.o.

Warszawa

PORTUGAL

CAME PORTUGAL,

UNIPESSOAL, LDA

Lisbon

RUSSIA

UMC RUS LLC

Moscow

SPAIN

CAME SPAIN S.A.

Madrid

THE UNITED KINGDOM

CAME BPT UK LIMITED

Nottingham

COMMERCIAL BRANCHES ASIA

U.A.E.

CAME GULF FZCO

Dubai

CHINA

CAME AUTOMATION SYSTEM CO

Shanghai

COMMERCIAL BRANCHES AMERICAS

BRAZIL

CAME DO BRASIL, INDÚSTRIA,
IMPORTAÇÃO, EXPORTAÇÃO,
COMÉRCIO E SERVIÇOS DE
AUTOMAÇÃO LTDA

São Paulo

MEXICO

CAME AUTOMATISMOS §
DE MEXICO S. DE R.L. DE C.V.

Mexico City

PERÚ

CAME PARKARE PERU S.A.C.

Lima

USA

CAME AMERICAS AUTOMATION LLC

Miami, FL

CANADA

CAME CANADA Inc.

Toronto



© DD-1302-0064 R(17) - 2025 - ENGLISH

YOU MAY NOT EVEN PARTIALLY REPRODUCE THIS DOCUMENT.

CAME RESERVES THE RIGHT TO MAKE ANY CHANGES TO THIS DOCUMENT AT ANY TIME.

CAME.COM/OZAK

