

VER PLUS CONNECT KIT

MAKE YOUR GARAGE SMART




COMPLETE KITS FOR GARAGE DOORS



CAME.COM

HOW IT WORKS

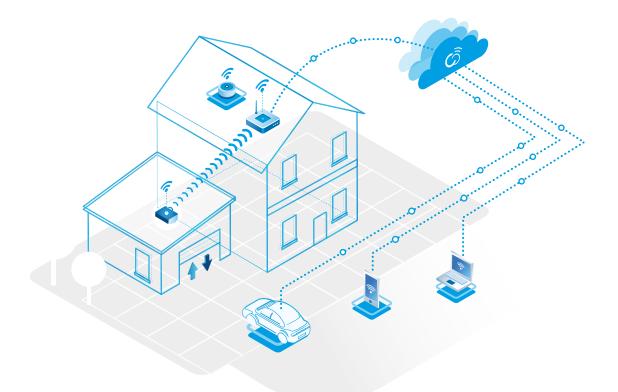

The VER PLUS CONNECT kits provide remote control of your garage door and activate remote assistance from your installer for any need.

VER PLUS CONNECT MAIN FEATURES

- VERSATILE two versions for doors : up to 18 m² with 1000 N of traction force up to 21 m² con 1300 N of traction force
- SMART WITH WI-FI CONNECTION for control via smartphone or tablet
- TOP REMOTE CONTROL stylish and secure with Rolling Code technology for storing up to 250 different users
- SAFE THANKS TO THE ENCODER for efficient deceleration control
- LOW ENERGY CONSUMPTION
 with 24V motor and LED courtesy light

- WITH OPTIONAL EMERGENCY BATTERIES optional in case of blackout
- EXTERNAL DISPLAY WITH KEYPAD for Open/Stop/Close functions programming and malfunction warnings
- VERIFICATION FUNCTION for automatic control of safety accessories
- COMPATIBLE WITH belt and chain guides

"ALEXA, OPEN THE GARAGE DOOR"

WI-FI CONNECTION FOR MANAGEMENT FROM SMARTPHONE

In addition to the exclusive TOP remote control, the VER PLUS CONNECT kit includes a Wi-Fi GATEWAY that allows the automation to be connected to any router in the home.

Thanks to the practical Automation App, it is possible to control the opening and closing of the tilting door directly from your smartphone, and to monitor the status of the automation remotely, also by means of a Web App on a PC.

The practical GATEWAY is plugged directly into the electronic board, is easily configurable and is compatible with all Wi-Fi routers available on the market.



12813



SMARTPHONE APPS CAME Automation available on:


VOICE COMMAND COMPATIBLE WITH AMAZON ALEXA

With VER PLUS CONNECT, the automation can also be operated using Amazon Alexa voice control. All you have to do is say the command to open or close your garage door, whether at home or in the car.



ONE VER PLUS

SYSTEM can be applied to all types of garage doors, such as



24 VOLT GEARMOTOR Tested according to European Standards and equipped with Encoder



CONTROL AND SAFETY ACCESSORIES

Compatible with all CAME accessories and equipped with a verification function for automatic photocell control.

WIRELESS ACCESSORIES.

Compatible with the RIO system for wireless connection of photocells, sensitive edges and flashing lights.





GRAPHIC DISPLAY WITH KEYPAD

Open/Stop/Close function. self-diagnosis and programming

IN-LINE OR 90° GUIDE WITH BELT OR CHAIN DRIVE

The gearmotor can be installed in line with the guide or at 90° to the guide if there are obstacles such as ceiling lights or lamps. In addition, it is compatible with all belt and chain drive models.

LED COURTESY LIGHT Low consumption and high energy efficiency.

INCLUDED IN THE KITS:

TOP series radio control with ROLLING CODE dual frequency technology for maximum security against cloning (4,294,967,896 possible <u>combinations</u>).


The four channels make it possible to control several automations with the same remote control.





CONNECT is the CAME technology that makes it possible to manage automations capable of improving the quality of life. Automations connected via the Internet offer added value to the user and open up new horizons for the installer's business.

CAME has chosen to develop in-house the technologies required to manage data flow and protection. No external agency processes the information, no server is located in remote locations around the world. An innovative technological heart that guarantees reliability and high security. CAME has invested in research and development with the aim of simplifying the installer's work, improving user experience and offering new digital services.

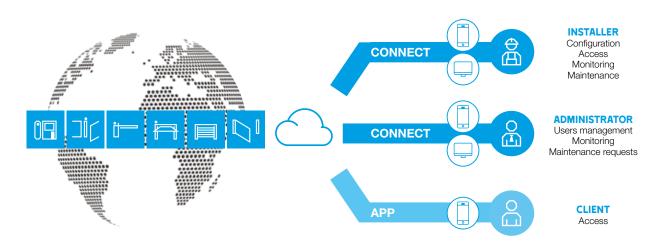

CONNECT AT THE INSTALLER'S AND ADMINISTRATOR'S SERVICE

Connected automations can be managed remotely via PC or smartphone.

The CONNECT platform enables automatic


programming of transmitters, management of customers and systems installed, and monitoring of device status and scheduled maintenance.

CONNECT allows the installer to offer a complete 24/7 service becoming the trusted partner for his customer.

CONNECT AT THE CUSTOMER'S SERVICE

Through the free Apps that can be installed on any Android or iOS smartphone, the user can control the devices remotely.

Compatible with Amazon Alexa devices, CAME automations can also be controlled by voice command.

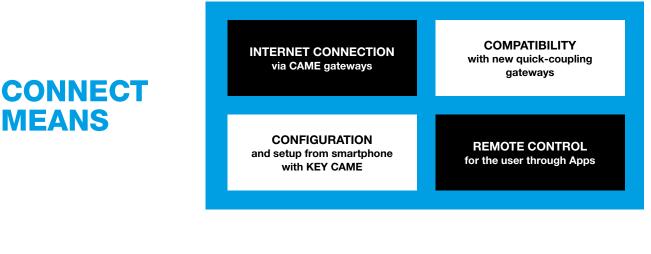



USER APP CAME Automation



INSTALLER APP CONNECT SetUp



WEB CONSOLE came.com/connect

CAME.COM

WI-FI GATEWAY FOR INSTALLERS

Thanks to the wi-fi GATEWAY, your installer can remotely access your system to keep it in perfect working order. For example, you can ask the technician:

App Store Google Play

- Update firmware on the control board for new features.
- Manage all automation parameters
- Check maneuvers for scheduled maintenance.
- Radio controls configuration via QR code.

CONNECT SetUp

available on:

CAME 🕇



Gateway Wi-Fi/Bluetooth 806SA-0140 included in the kit

QUALITY FOR CAME IS THE GUIDING PRINCIPLE OF EVERYTHING.



VER PLUS CONNECT is completely made in Italy and, like all CAME automation solutions, is the result of our smart production model that includes the digitization of each phase, integrating a complete series of tests on 100% of the products.

- · Safety microswitch testing
- Functional test
- Control board functional test
- Traceability of test data on serial number and production batch



TESTING ONE BY ONE







ENGINEERING








Find out more on QUALITY INSIDE www.came.com/qi

THE COMPLETE RANGE

CODE	DESCRIPTION
VER PLUS KIT	8K01MV-026 - GARAGE DOORS UP TO 21 m ²
801MV-0020	VER13DMS - Operator with encoder, featuring a control panel for sectional and overhead garage doors.
001AF43S	433.92 MHz plug-in radio frequency card.
806SA-0140	Gateway to connect the operator to the cloud via WiFi or locally via Bluetooth mode (5 users).
806TS-0121	TOPD4RBS - Four-channel, double-frequency, rolling code transmitter, blue. 4,294,967,896 combinations.
VER PLUS KIT	8K01MV-025 - GARAGE DOORS UP TO 18 m ²
801MV-0010	VER10DMS - Operator with encoder, featuring a control panel for sectional and overhead garage doors.
001AF43S	433.92 MHz plug-in radio frequency card.
806SA-0140	Gateway to connect the operator to the cloud via WiFi or locally via Bluetooth mode (5 users).
806TS-0121	TOPD4RBS - Four-channel, double-frequency, rolling code transmitter, blue. 4,294,967,896 combinations.

DIMENSIONS



TECHNICAL CHARACTERISTICS AND LIMITS OF USE

MODEL	801MV-0010	801MV-0020
KIT CODE	8K01MV-025	8K01MV-026
Protection rating (IP)	40	40
Power supply (V - 50/60 Hz)	230 AC	230 AC
Motor power supply (V) 24 DC 24 DC	24 DC	24 DC
Current draw (A)	10 Max	10 Max
Power (W)	180	280
Operating temperature (°C)	-20 to +55	-20 to +55
Cycles/Hour	30	30
Traction force (N)	1000	1300
Max. door surface (m²)	18	21
		• 24 V DC

© CAME SPA - KADENTZE21 - 2021 - EN Came reserves the right to make any changes to this document at any time. Even partial reproduction is prohibited.



CAME S.p.A. Via Martiri della Libertà, 15 31030 Dosson di Casier Treviso - ITALY We are a leading multinational supplier of integrated high-tech solutions for automating residential, public and urban settings which generate intelligent spaces for the wellbeing of people.

- → GATE AUTOMATION
- → VIDEO ENTRY SYSTEMS
- → AUTOMATIONS FOR GARAGES AND INDUSTRIAL DOORS

CE

- → AUTOMATIC BARRIERS
- → PARKING SYSTEMS
- → TURNSTILES AND SPEED GATES
- → BOLLARDS AND ROAD BLOCKERS
- → HEATING CONTROL
- → AUTOMATIC DOORS
- → SHUTTER AND BLIND SOLUTIONS
- → BURGLAR ALARM SYSTEMS
- → HOME AUTOMATION

